


## DURAGRID®

### R-7300 1" FIBERGLASS GRATING

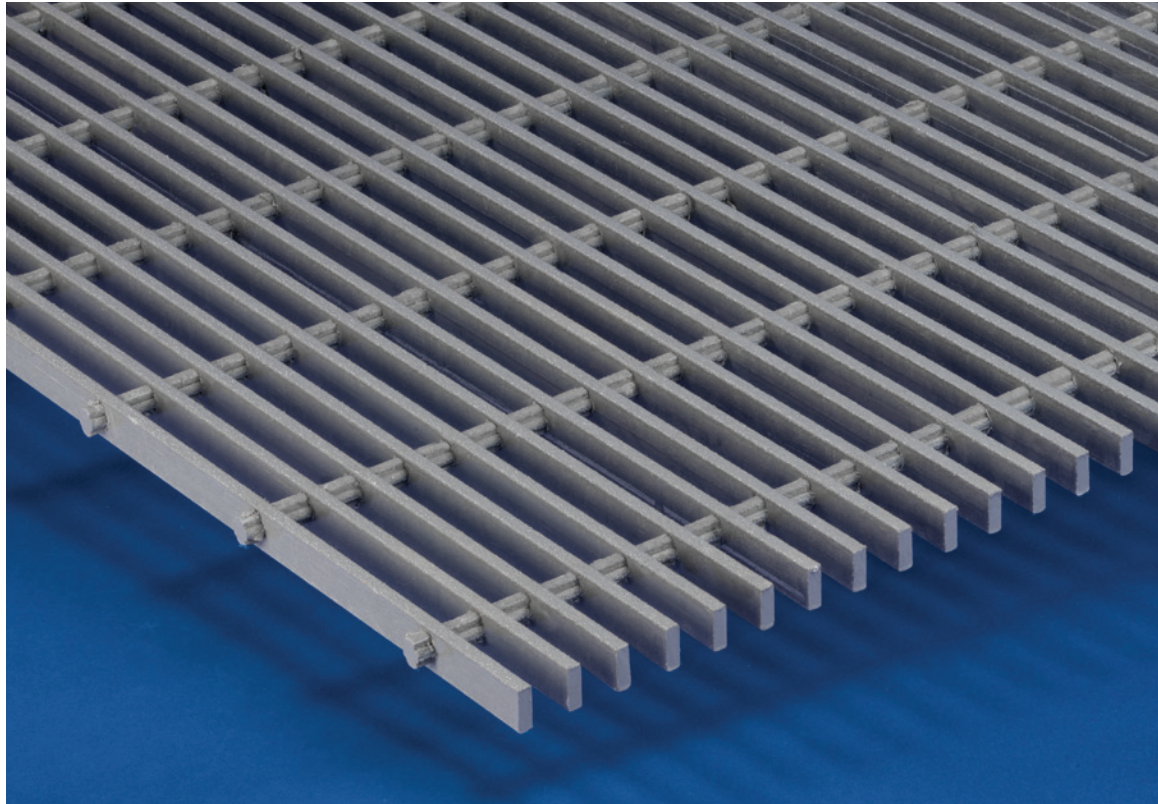

- **Lightweight**
- **Easy to Install**
- **Rot, Rust & Mildew Resistant**
- **Low in Conductivity**
- **Strong**
- **Flame Retardant**
- **Low in Maintenance**

DURAGRID® R-7300 1" fiberglass grating is specially designed to replace 1" steel grating in corrosive environments. The rectangular bar construction yields 73% open space and aligns identically to standard steel grating. The bearing bar spacing of 1.1875" on center is the same spacing as standard steel grating and provides a replacement that is similar in appearance. DURAGRID® R-7300 1" fiberglass grating will not rust and corrode like steel grating and will reduce maintenance costs.



DURAGRID® R-7300 1" fiberglass grating weighs only 3.2 lbs. per square foot, less than half the 7.4 lbs. per square foot for 1" steel grating. The fiberglass grating will also span 36" with a load of 100 lbs. per square foot resulting in deflection of less than 1/4".

DURAGRID® R-7300 1" fiberglass grating is produced in gray or safety yellow.

## Materials of Construction


DURAGRID® R-7300 1" fiberglass grating is a composite of fiberglass roving and mat with a polyester thermoset resin system, produced by the pultrusion process. The bearing bars use both longitudinal glass rovings and multidirectional continuous strand mat, as well as a synthetic surfacing veil to provide high strength and corrosion resistance. The bearing bars are connected together by Strongwell's unique 3-piece cross rod assembly system using epoxy resin to bond the bearing bars and cross rods together. The two standard colors are gray and yellow.

## Accessories



One method for holding down the R-7300 is to use the Hilti Power-Actuated X-GR-RU. This offers quick installation and removal.

## Dimensional Details

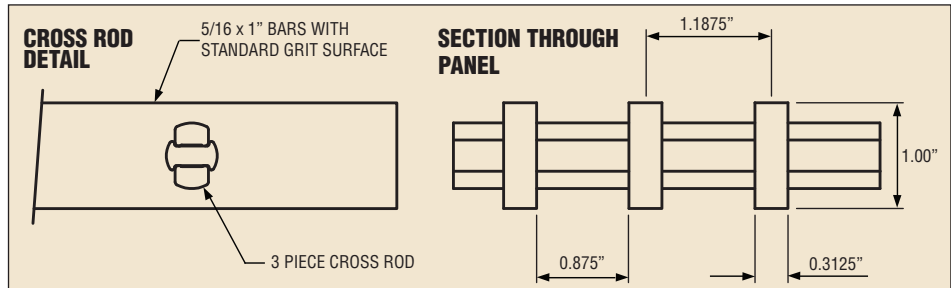

### DURAGRID® R-7300 1" Bearing Bar

A = 3.163 IN<sup>2</sup>/FT OF WIDTH    I = 0.262 IN<sup>2</sup>/FT OF WIDTH    S = 0.524 IN<sup>3</sup>/FT OF WIDTH  
73% OPEN AREA    APPROX. WT. = 3.2 LBS/SQ FT

SPAN (INCHES)	LOAD															SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION E x 10 <sup>6</sup> psi	
	50	100	150	200	250	300	400	500	750	1000	2000	3000	4000	5000				
<b>12</b>	Δu	0.001	0.002	0.003	0.004	0.005	0.007	0.009	0.011	0.016	0.022	0.044	0.065	0.087	0.109	12940	0.282	<b>3.94</b>
	Δc	0.002	0.003	0.005	0.007	0.009	0.010	0.014	0.017	0.026	0.035	0.070	0.105	0.139	0.174	6470	0.226	
<b>18</b>	Δu	0.005	0.009	0.014	0.019	0.023	0.028	0.037	0.047	0.070	0.093	<b>0.187</b>	0.280	0.374	0.467	5680	0.531	<b>4.65</b>
	Δc	0.005	0.010	0.015	0.020	0.025	0.030	0.040	0.050	0.075	0.100	0.199	0.299	0.399	0.499	4260	0.425	
<b>24</b>	Δu	0.014	0.028	0.043	0.057	0.071	0.085	0.114	0.142	<b>0.213</b>	0.284	0.569				3150	0.898	<b>4.83</b>
	Δc	0.011	0.023	0.034	0.046	0.057	0.068	0.091	0.114	0.171	0.228	0.455	0.683			3150	0.719	
<b>30</b>	Δu	0.033	0.067	0.100	0.134	0.167	<b>0.200</b>	0.267	0.334	0.501	0.668					2020	1.351	<b>5.02</b>
	Δc	0.021	0.043	0.064	0.086	0.107	0.128	0.171	0.214	0.321	0.428					2520	1.080	
<b>36</b>	Δu	0.067	0.134	<b>0.201</b>	0.268	0.334	0.401	0.535	0.669							1370	1.838	<b>5.20</b>
	Δc	0.036	0.071	0.107	0.143	0.178	0.214	0.285	0.357	0.535						2050	1.464	
<b>42</b>	Δu	0.123	<b>0.246</b>	0.370	0.493	0.616										990	2.451	<b>5.23</b>
	Δc	0.056	0.113	0.169	0.225	0.282	0.338	0.451	0.563							1730	1.956	
<b>48</b>	Δu	<b>0.209</b>	0.419	0.628												780	3.306	<b>5.25</b>
	Δc	0.084	0.168	0.251	0.335	0.419	0.503	0.670								1570	2.645	
<b>54</b>	Δu	0.333	0.667													630	4.212	<b>5.28</b>
	Δc	0.119	0.237	0.356	0.474	0.593										1420	3.370	

NOTE: The red line (  ) indicates at what point the load weight has ≤ .25" deflection.



ISO-9001 Quality Certified Manufacturing Plants

#### BRISTOL LOCATION

400 Commonwealth Ave., P.O. Box 580, Bristol, VA 24203-0580 USA  
(276)645-8000

#### CHATFIELD LOCATION\*

1610 Highway 52 South, Chatfield, MN 55923-9799 USA  
(507)867-3479

\*DURAGRID manufacturing location

www.strongwell.com

ST1116  
© 2016 Strongwell