



STRONGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	WALL SECTION NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	



NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.

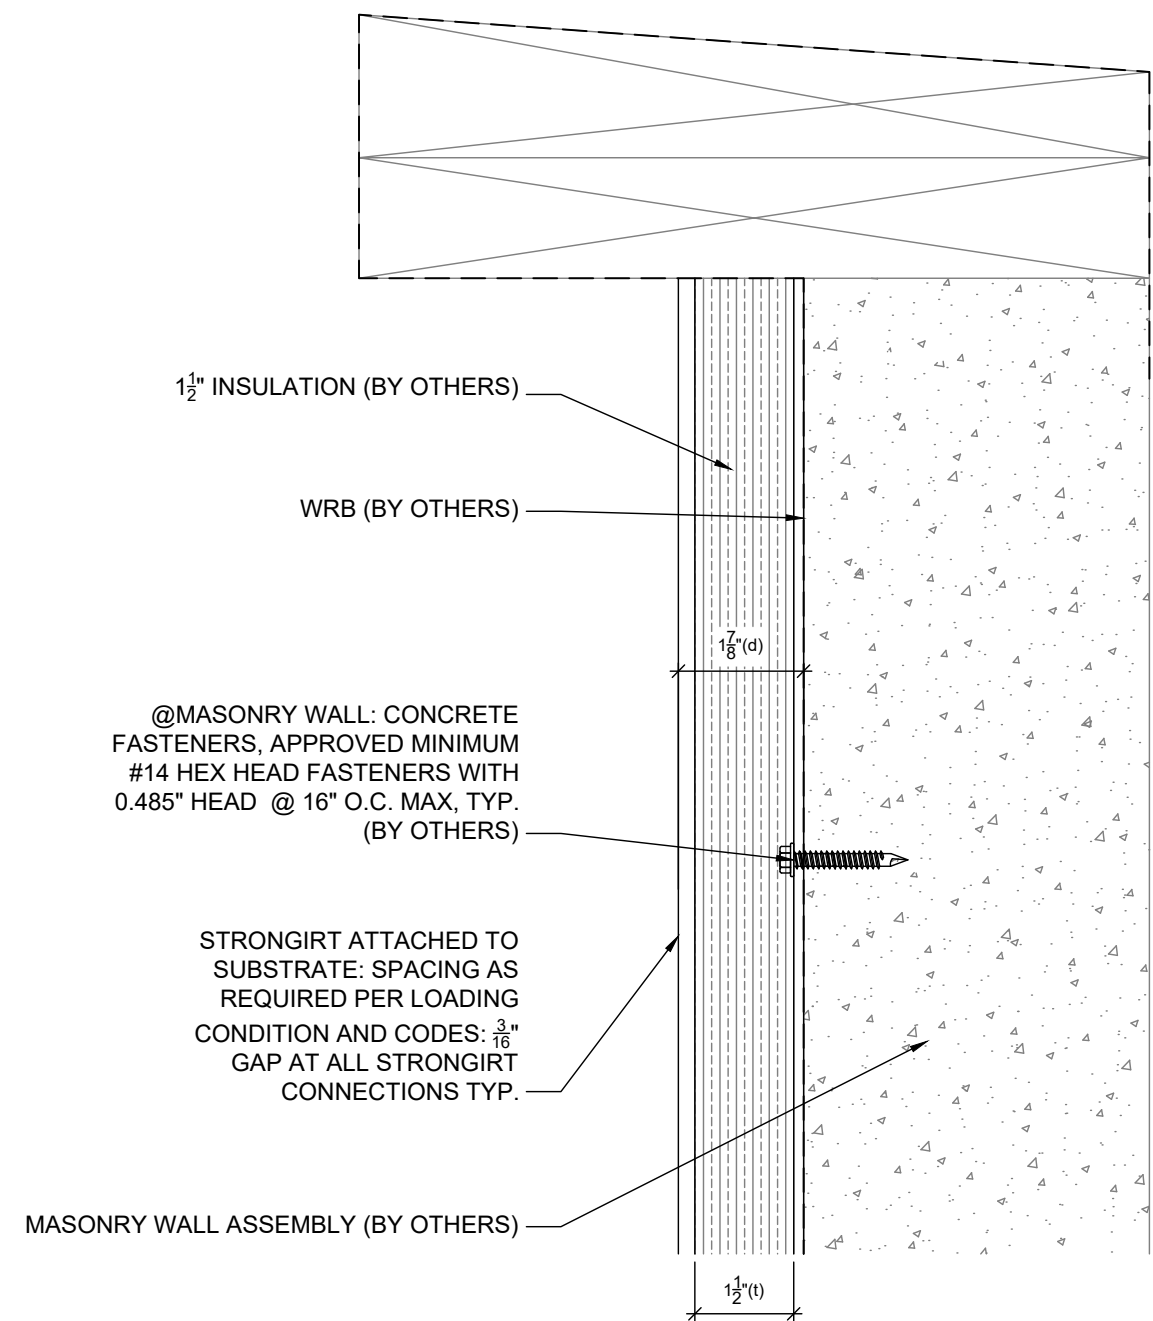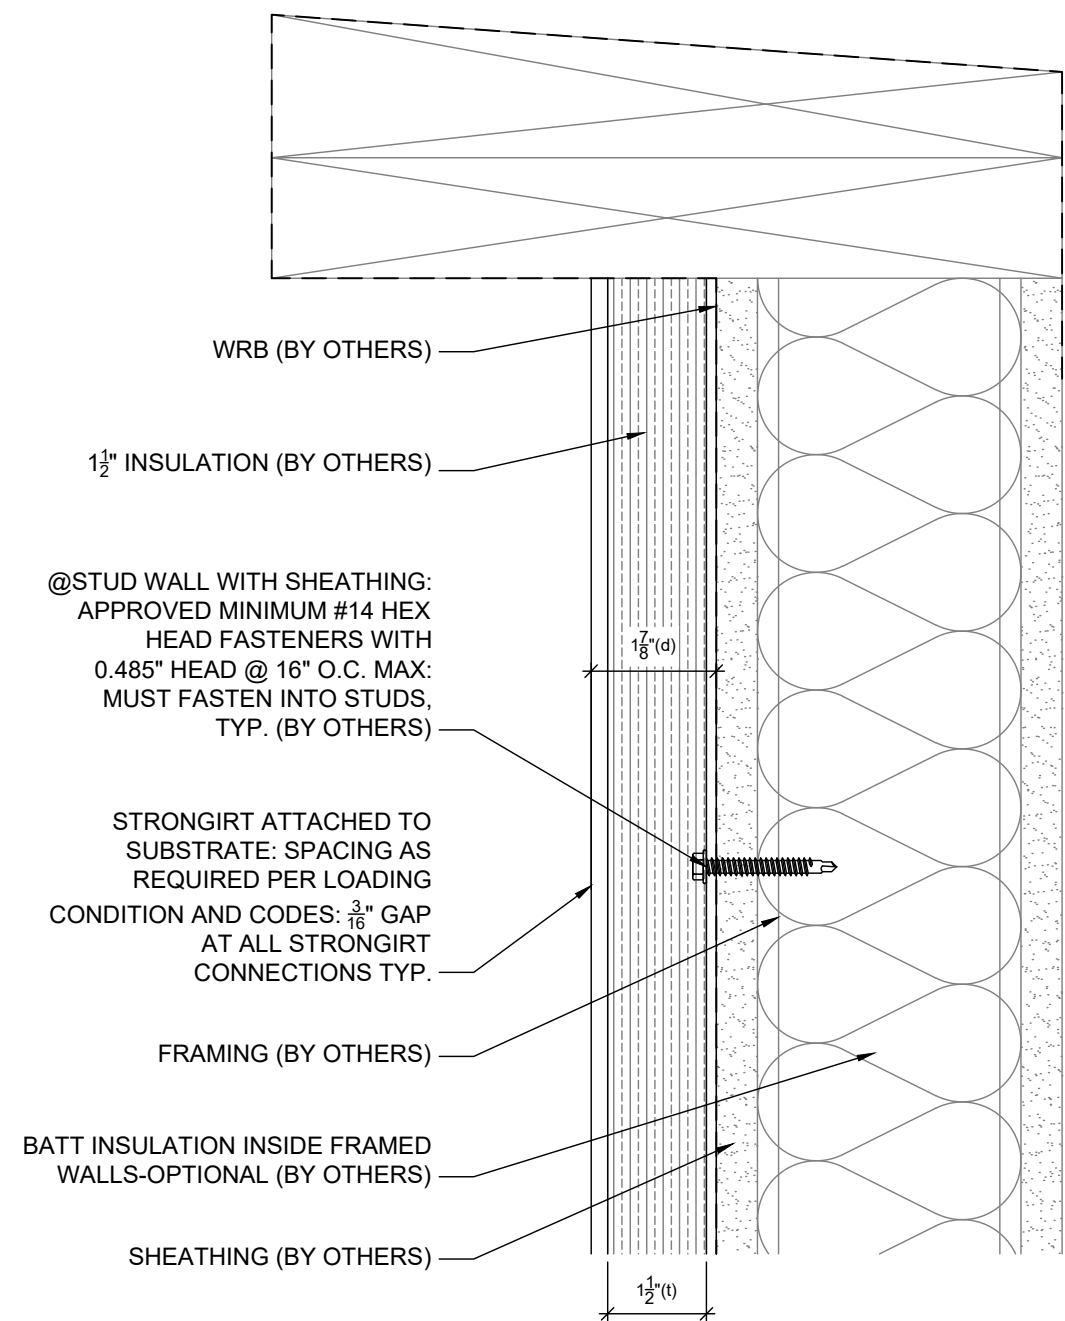



STRONGGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	PARAPET DETAIL NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	




NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.

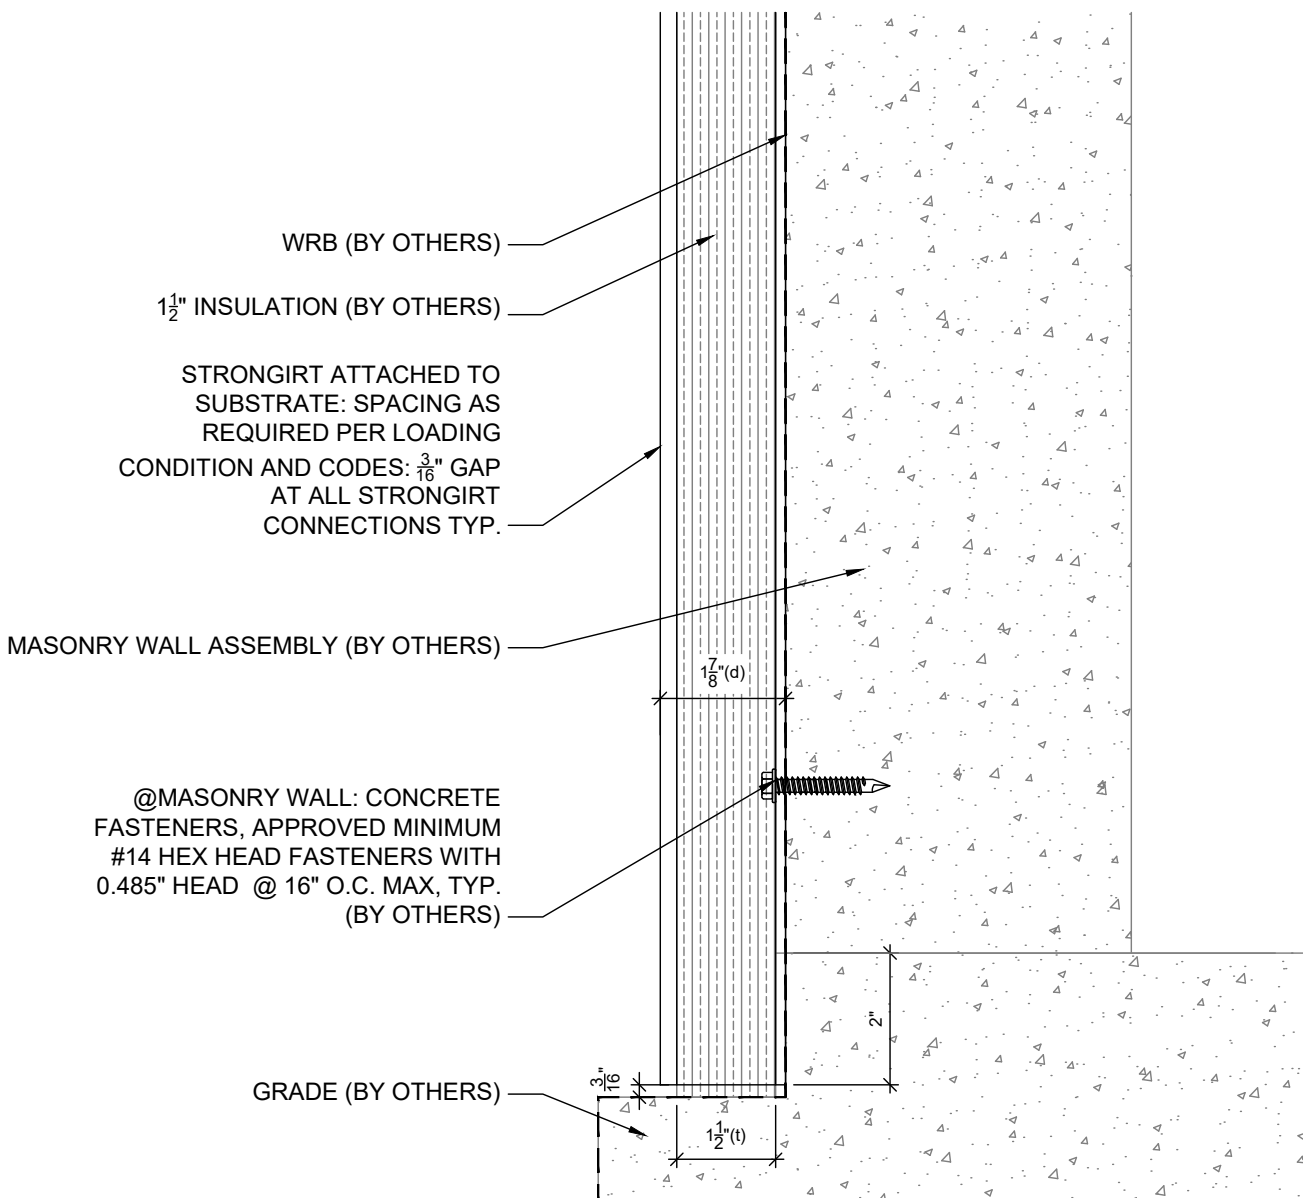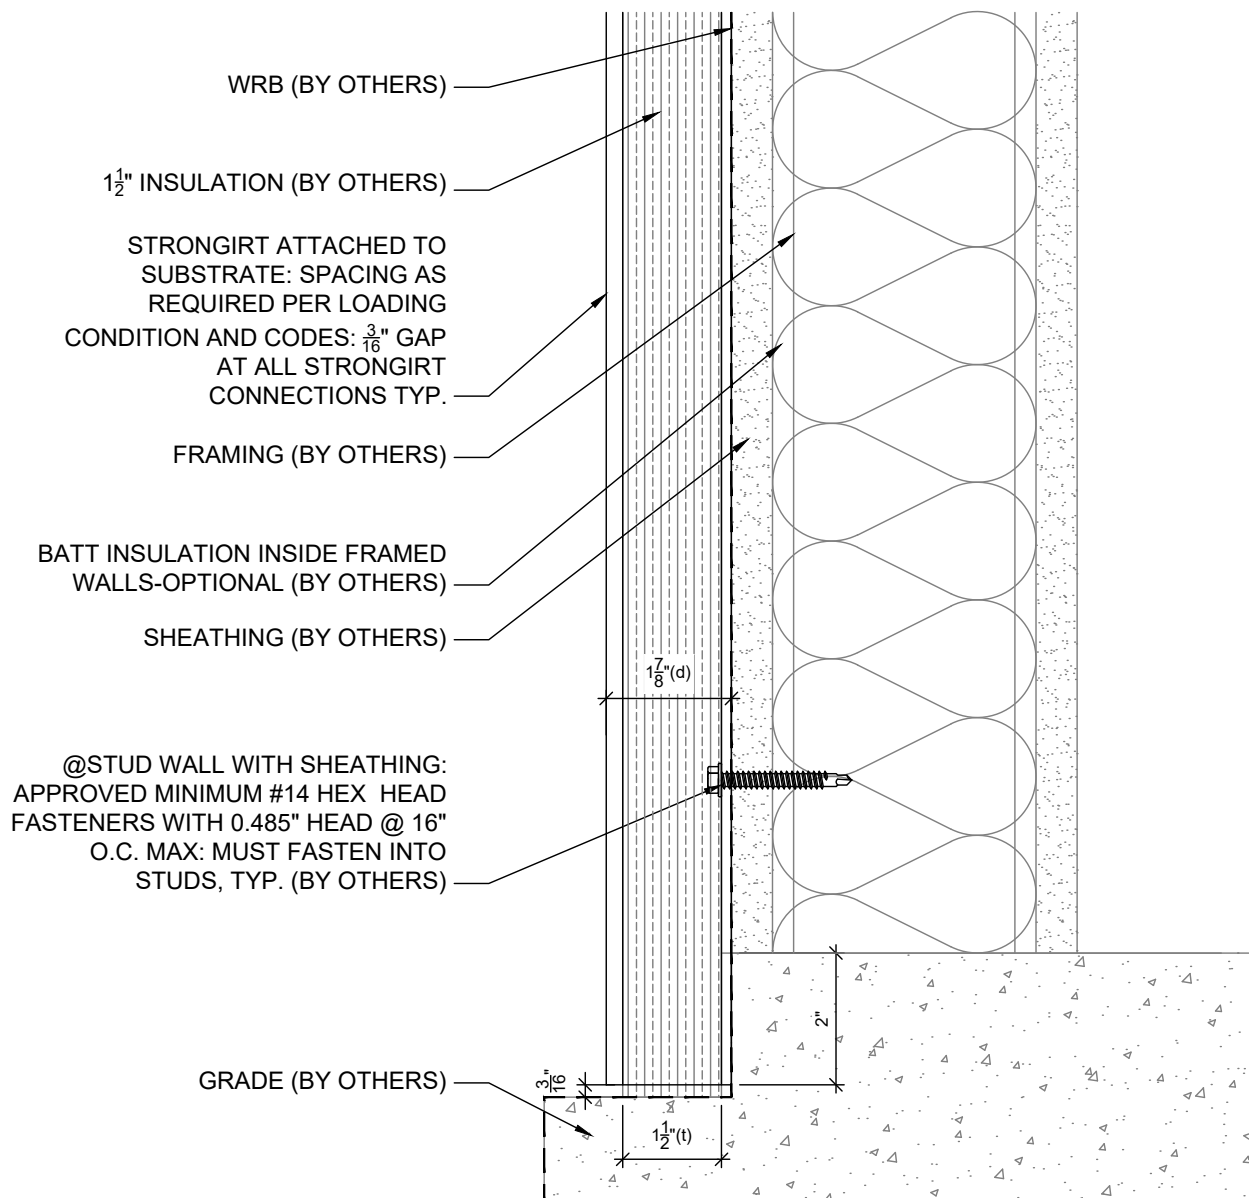

STRONGGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	FOUNDATION NOTCH DETAIL NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	

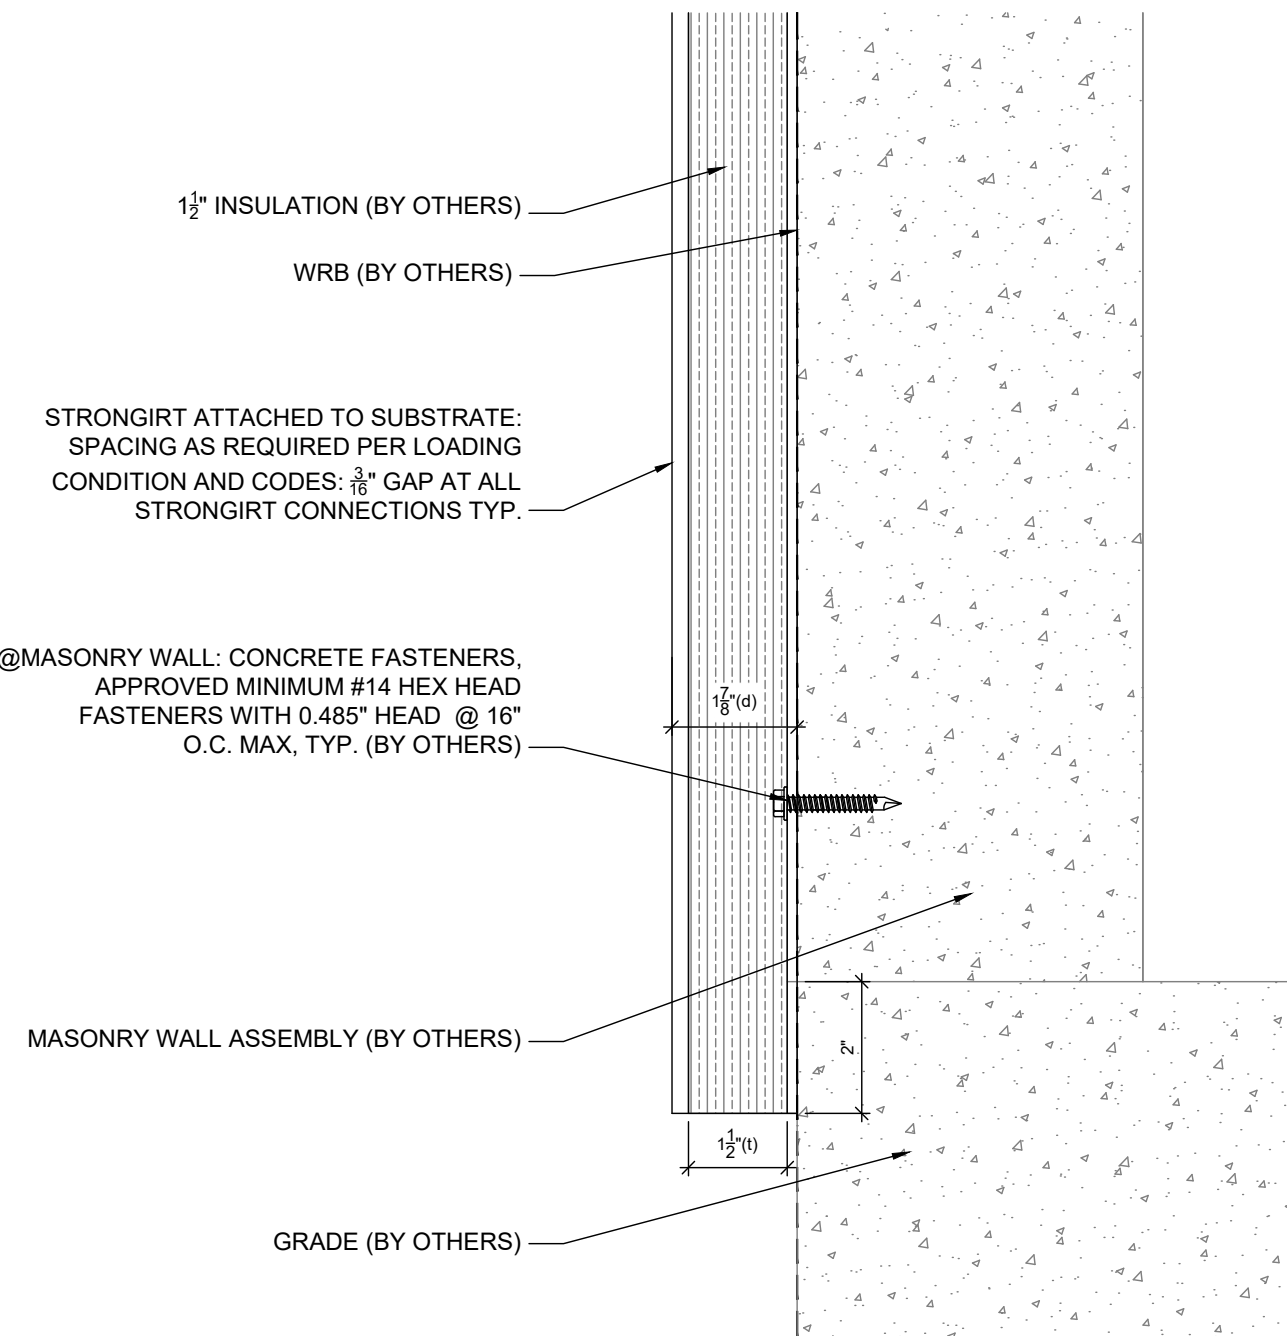



INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	<div>FOUNDATION FLUSH DETAIL</div> <div>NOT TO SCALE</div>
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	



NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.

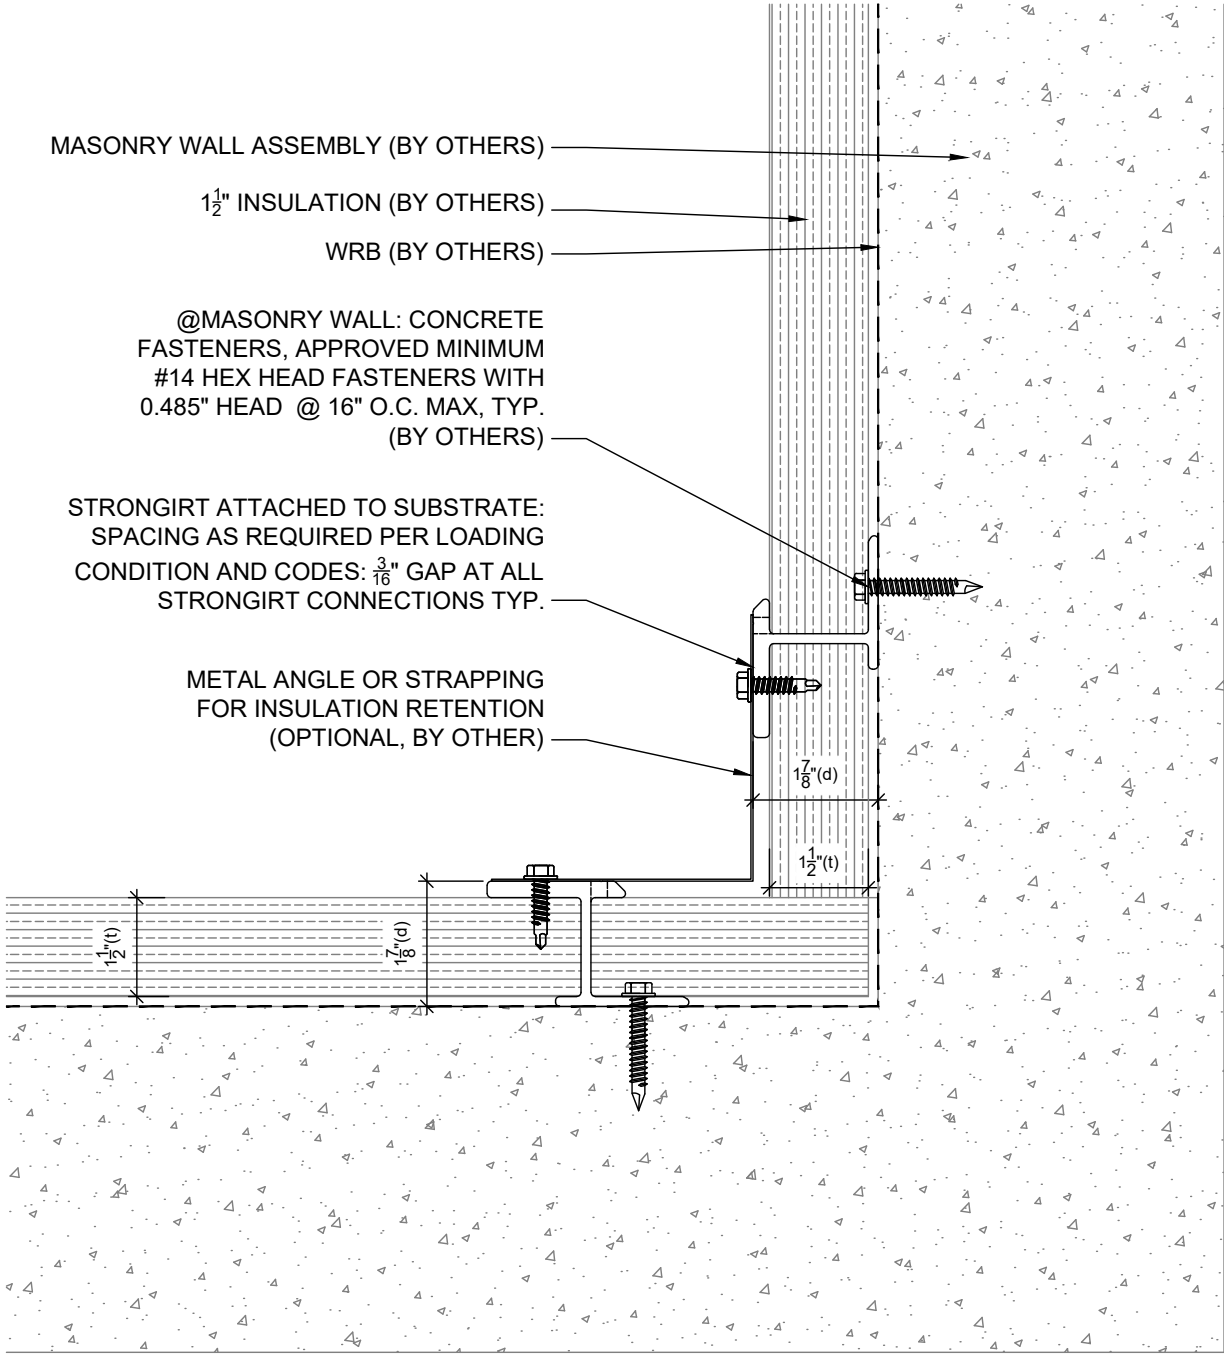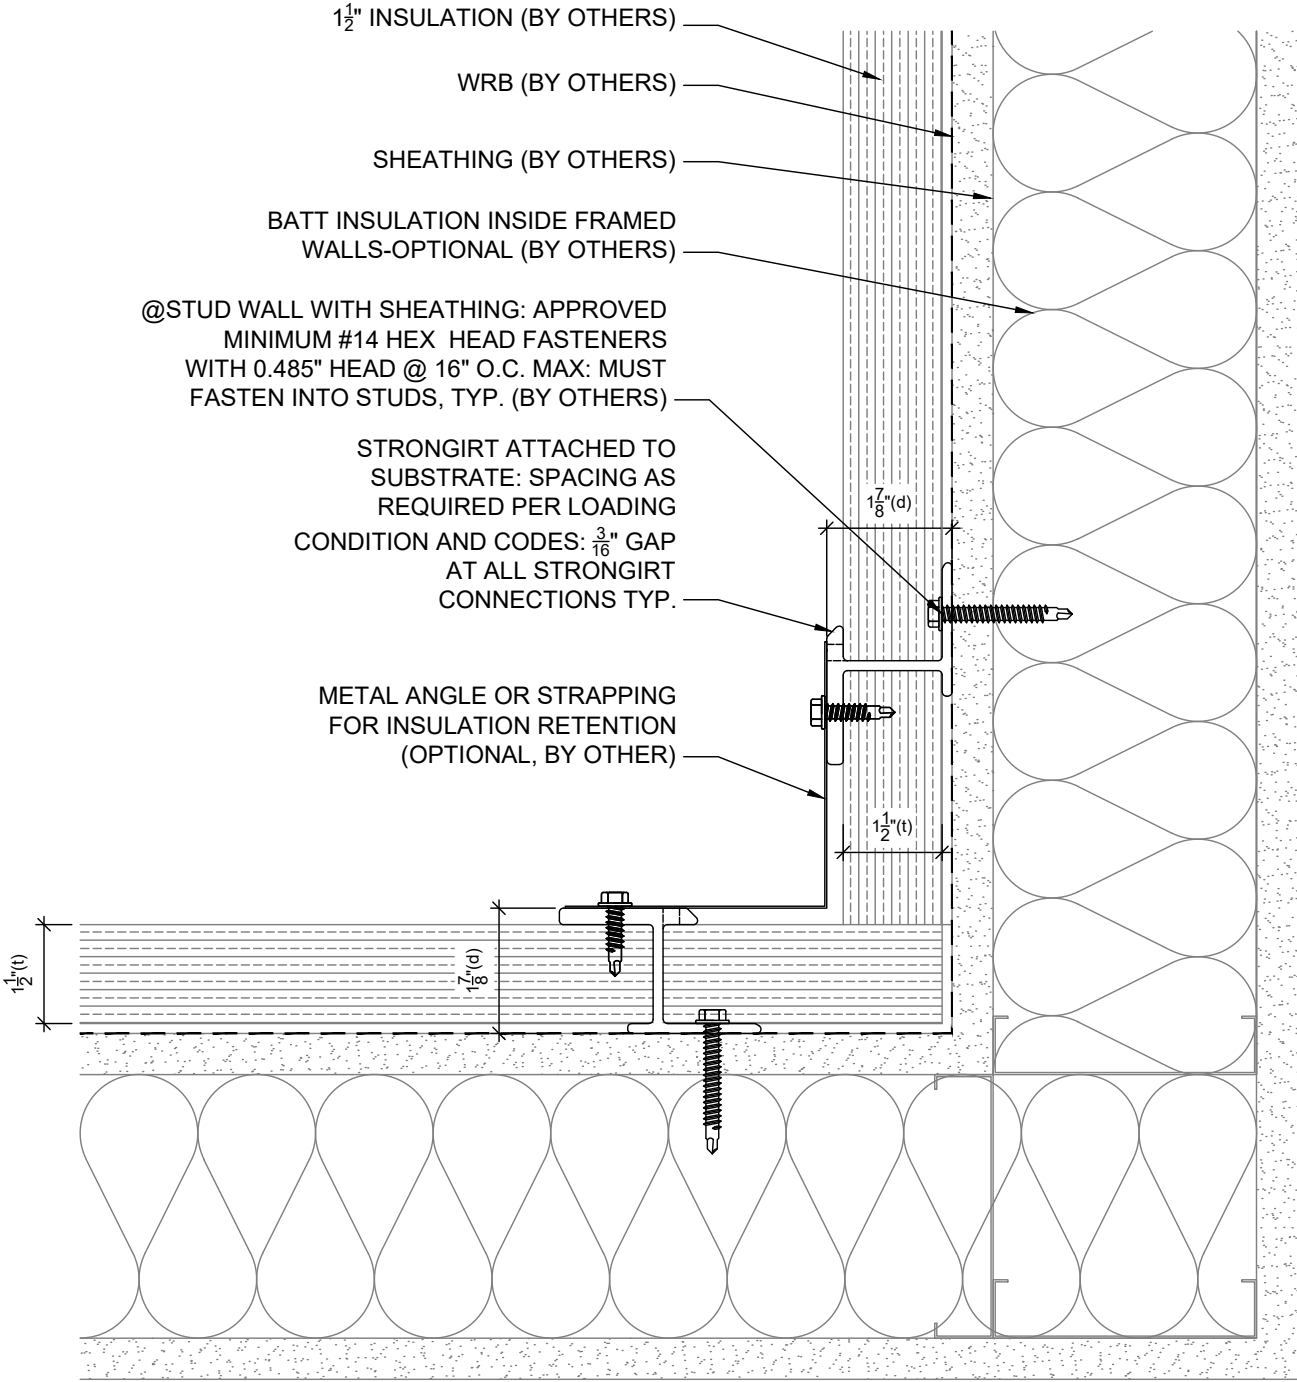



STRONGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	INSIDE CORNER DETAIL NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	



NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.

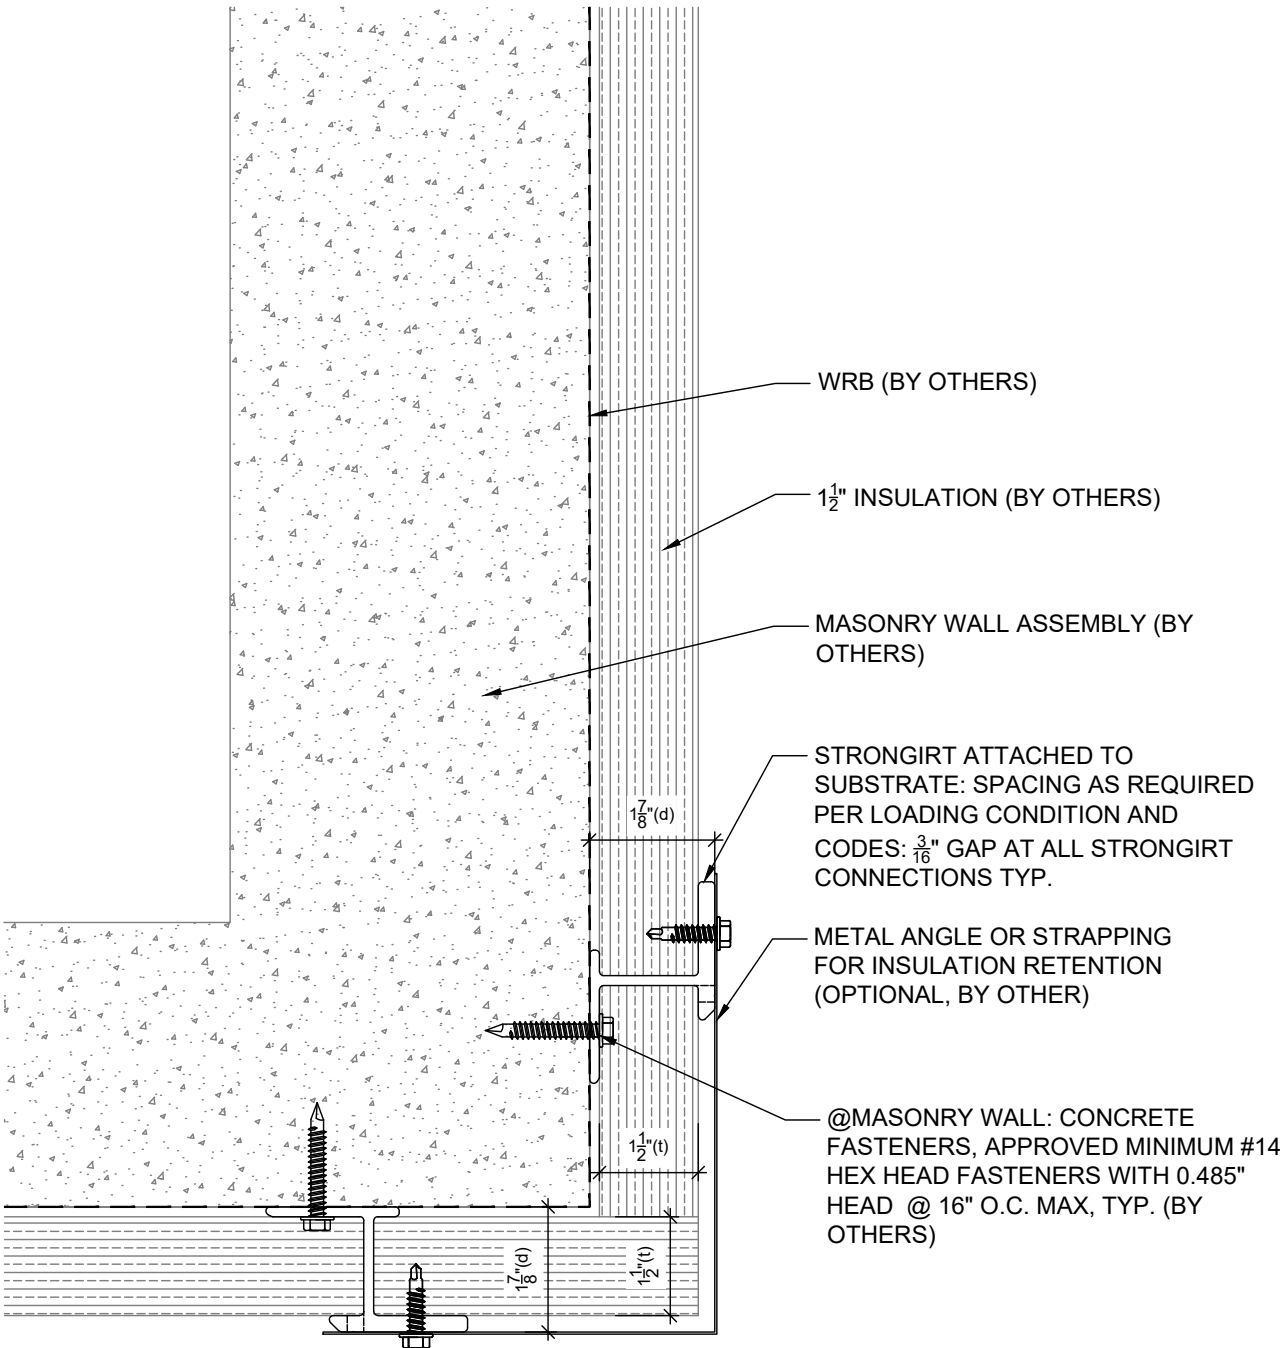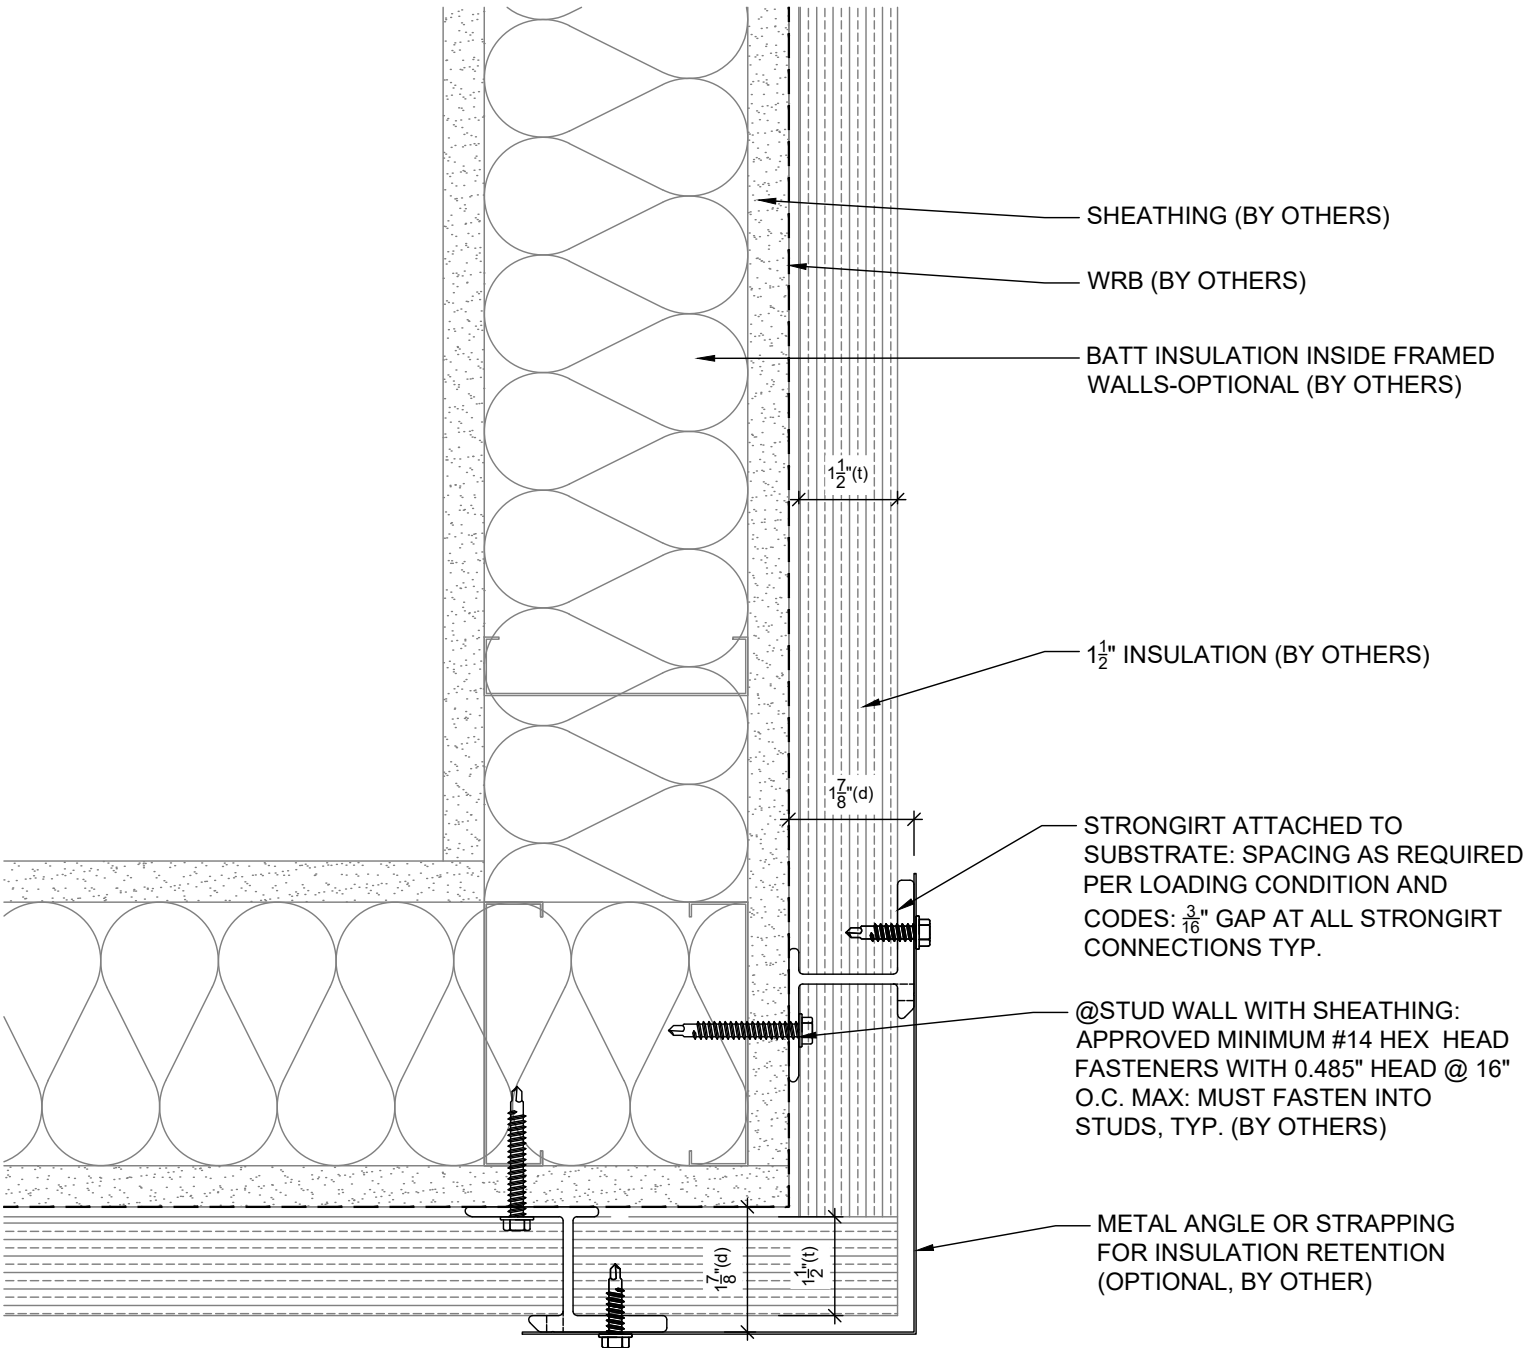



STRONGGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	OUTSIDE CORNER DETAIL NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	



NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.

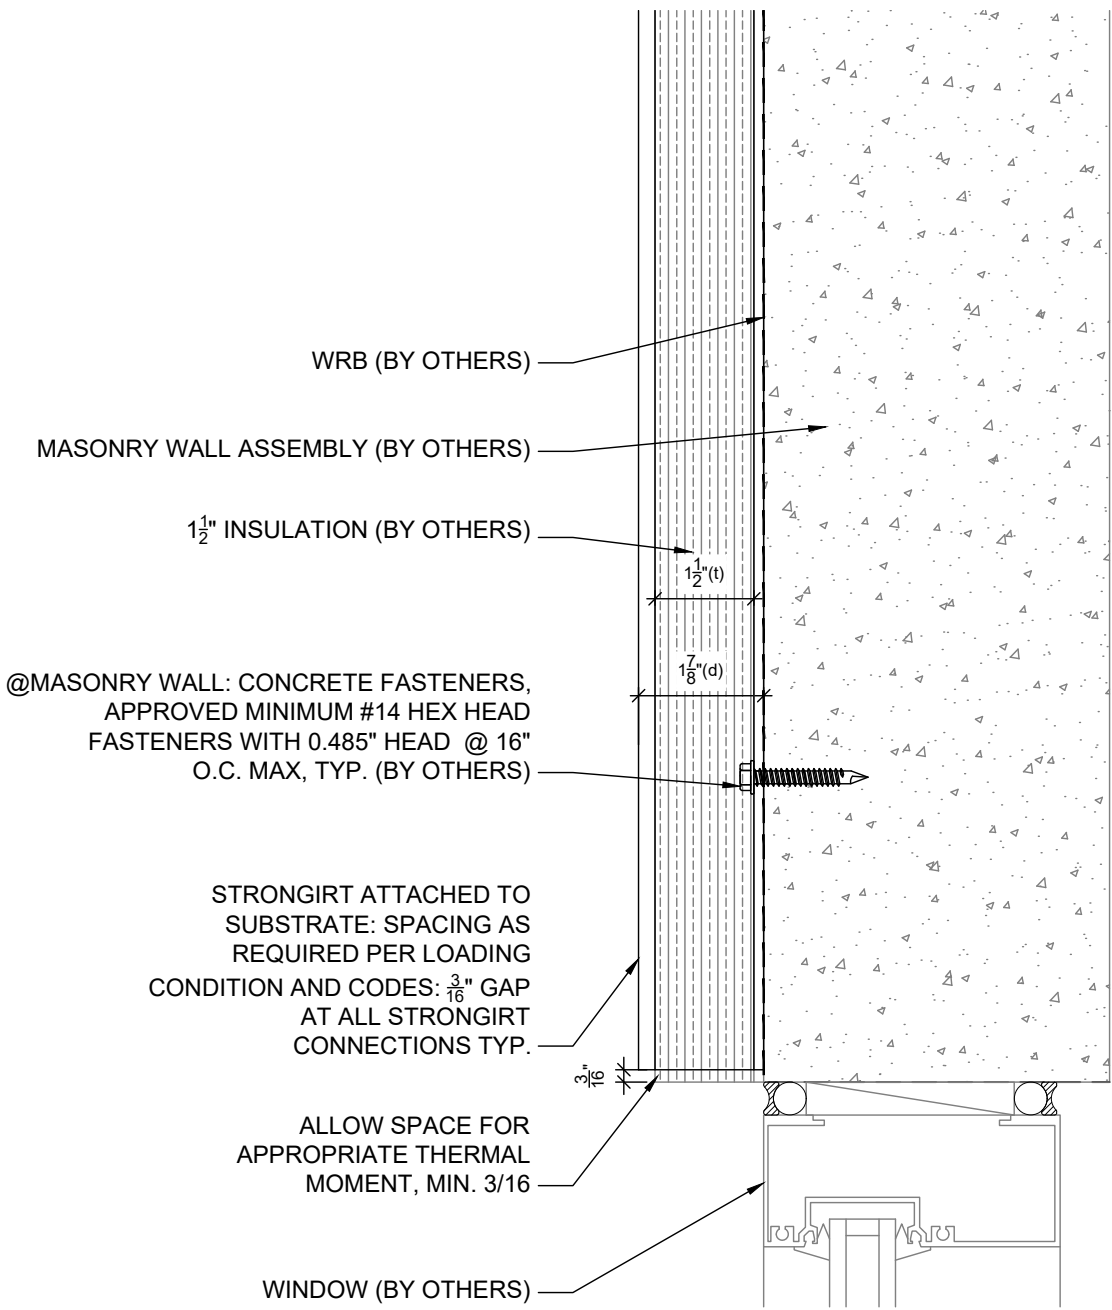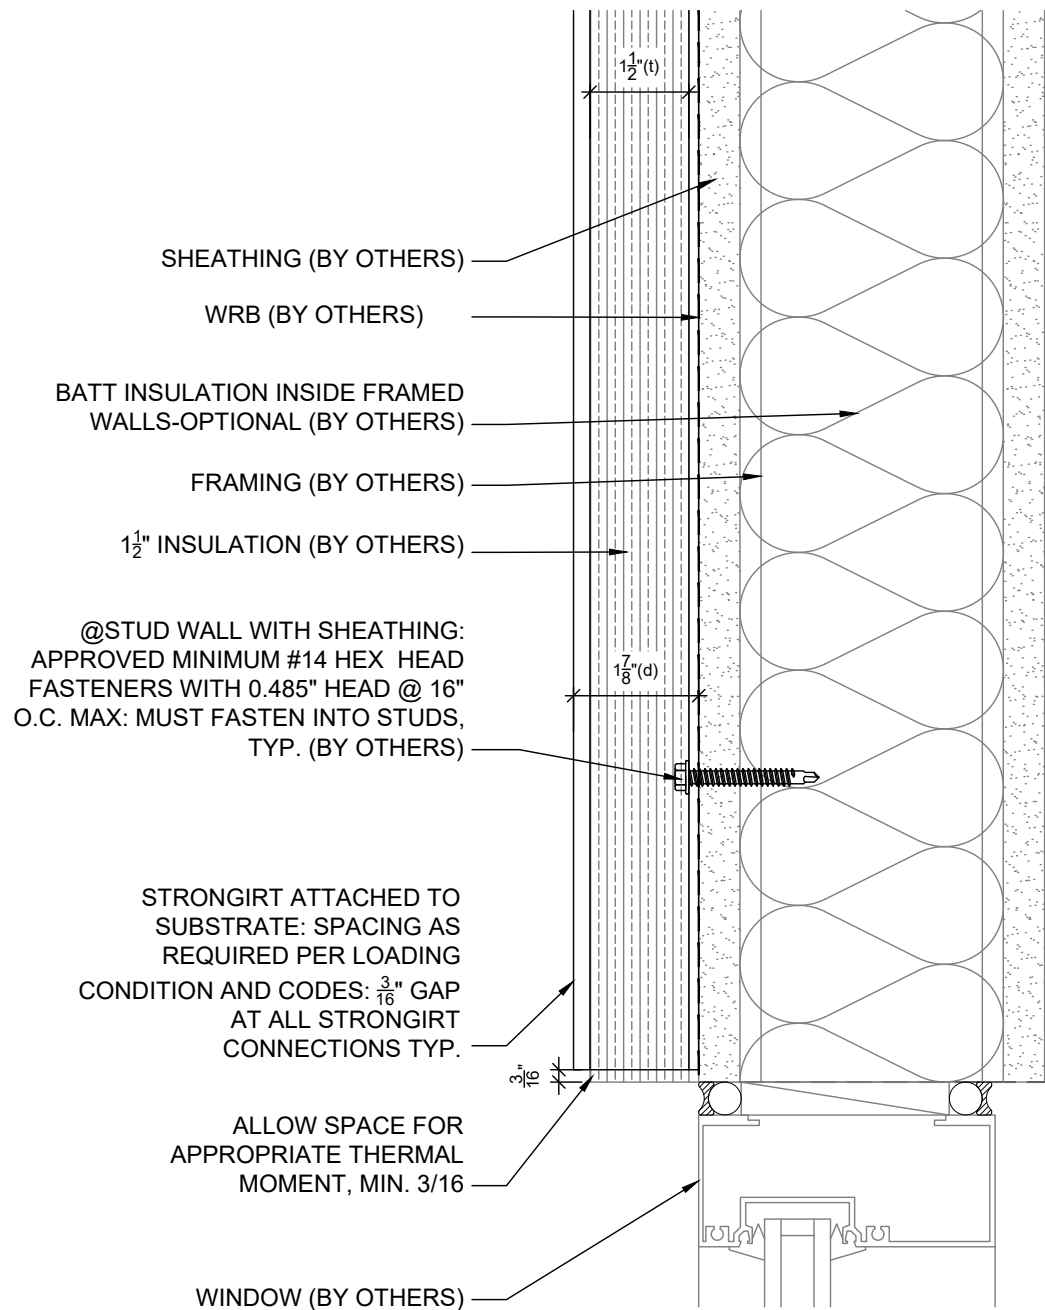


STRONGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	HEADER DETAIL NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	



NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.

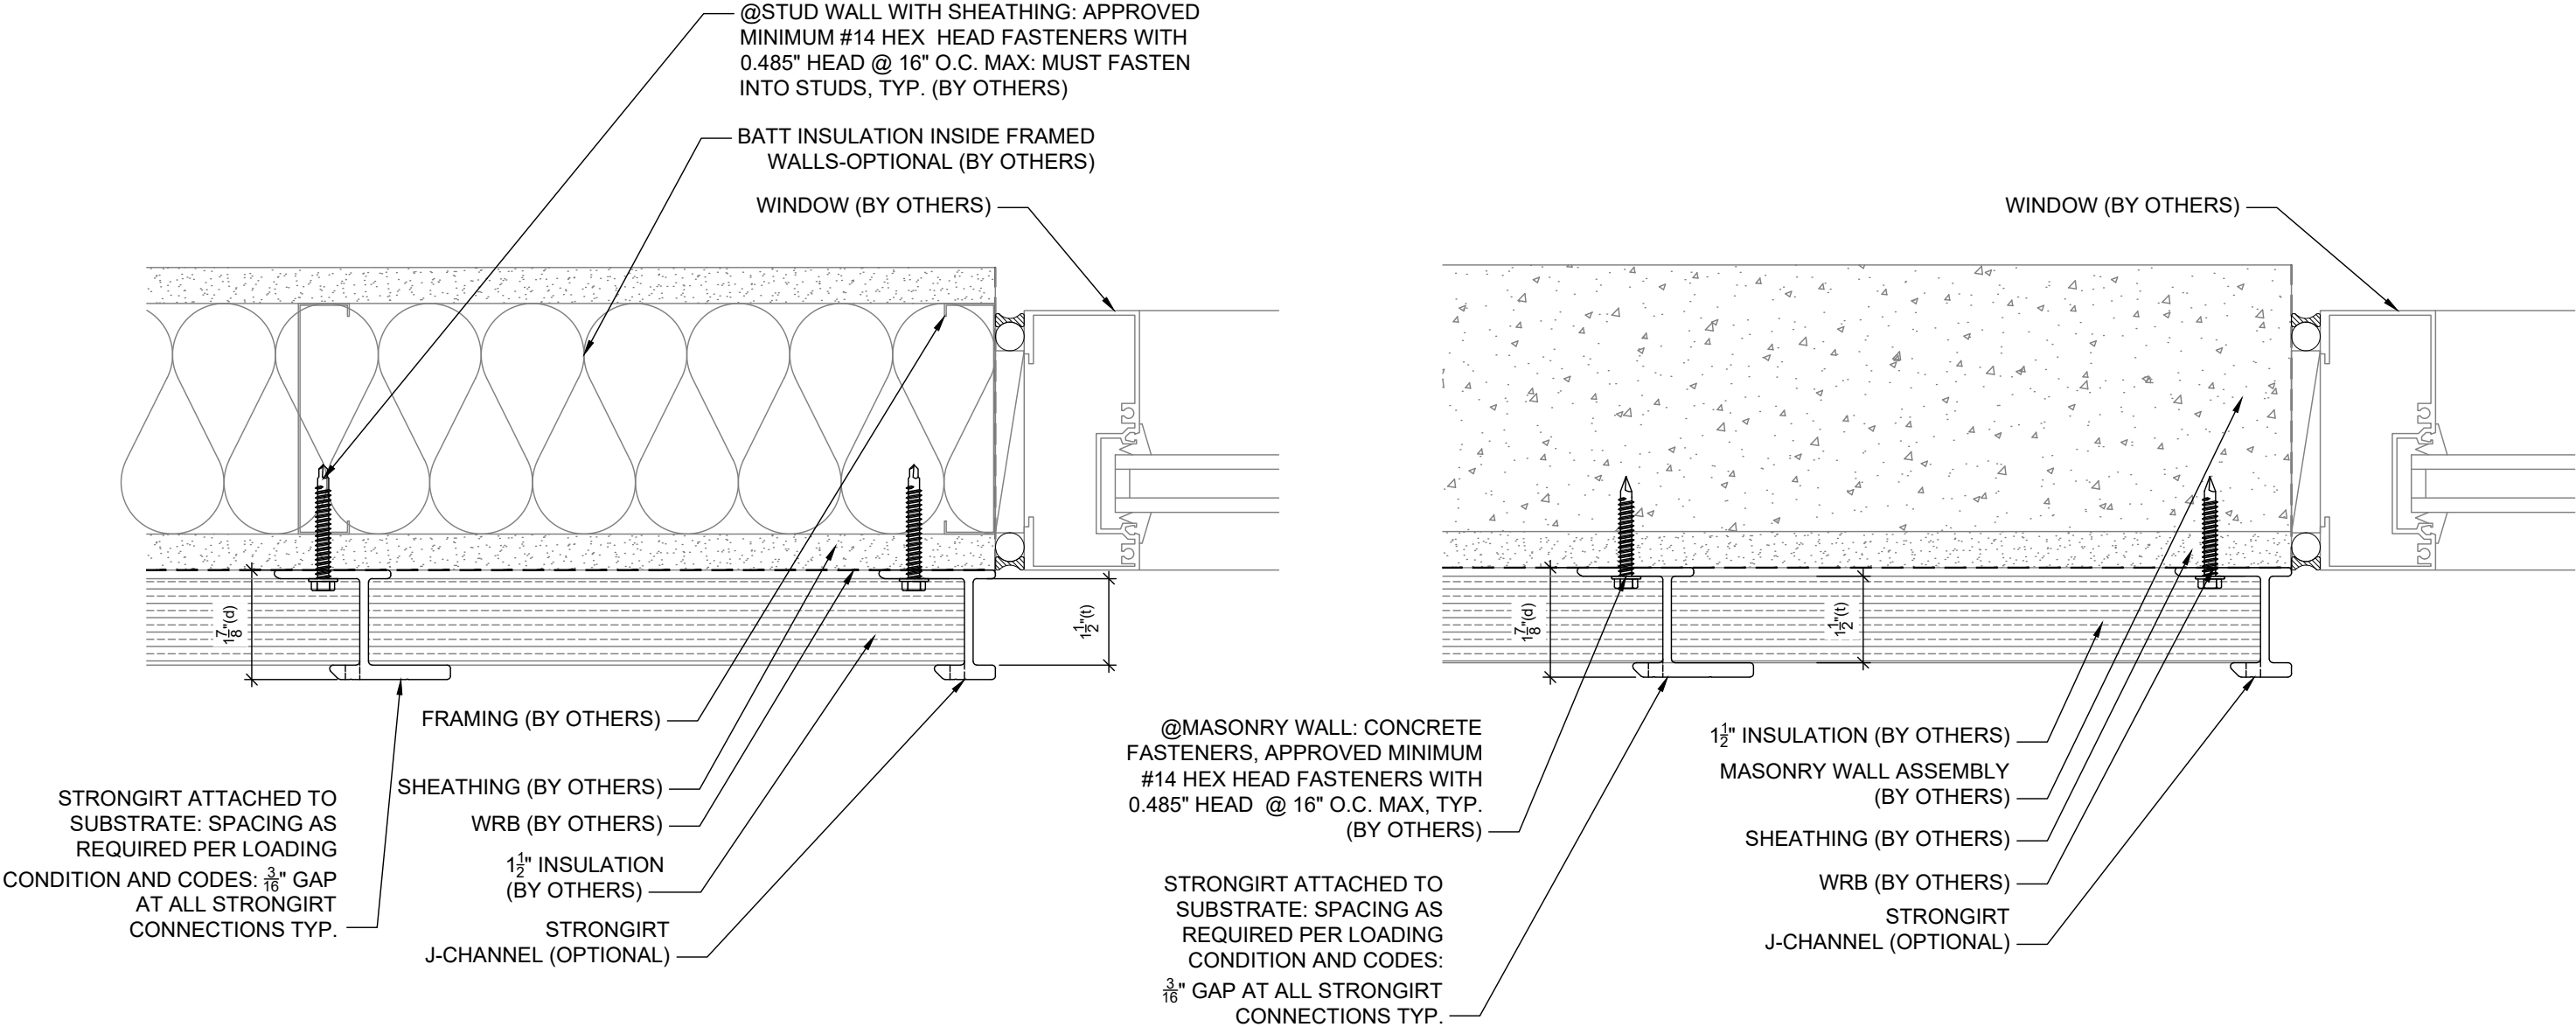



STRONGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	JAMB DETAIL NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	



NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.

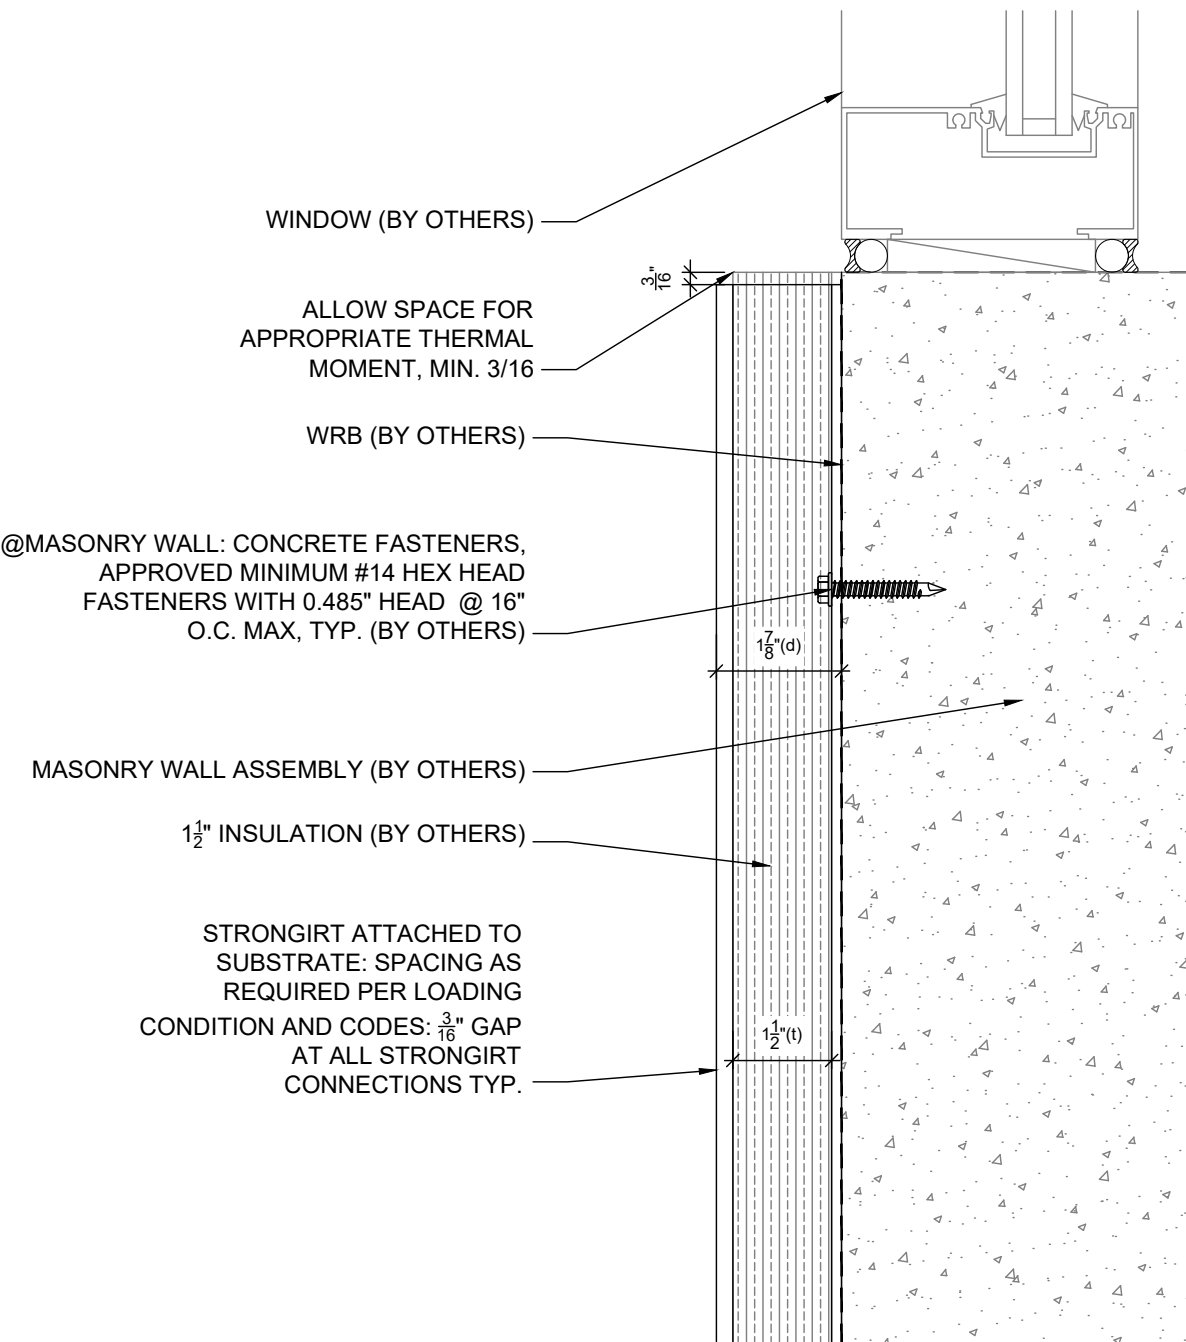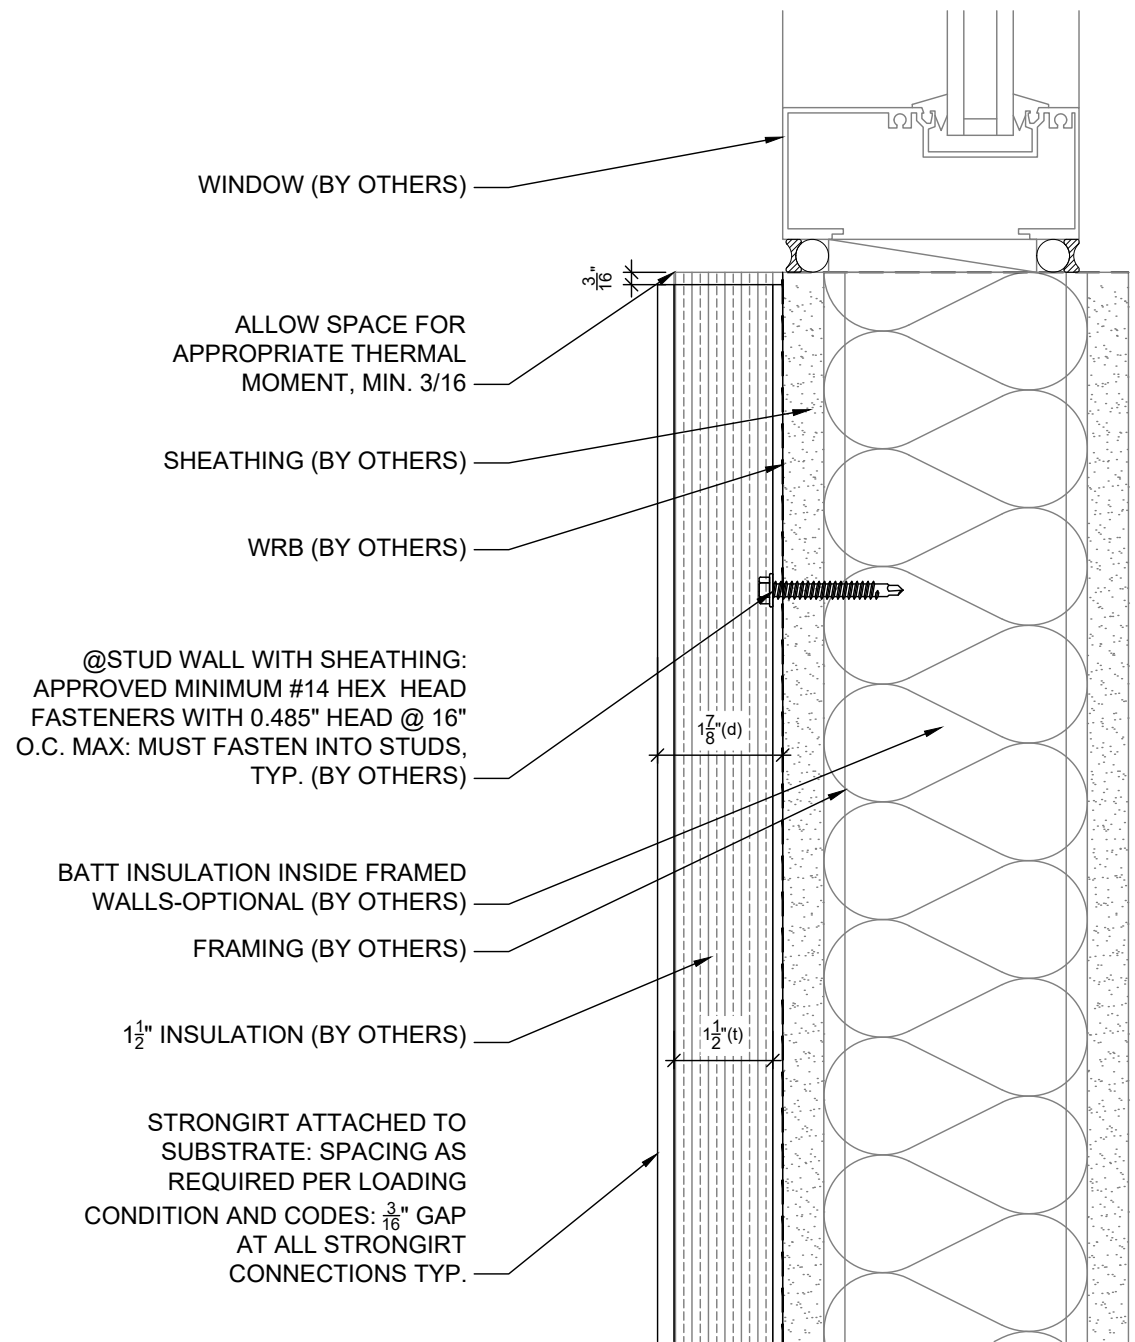



STRONGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	SILL DETAIL NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	



NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.

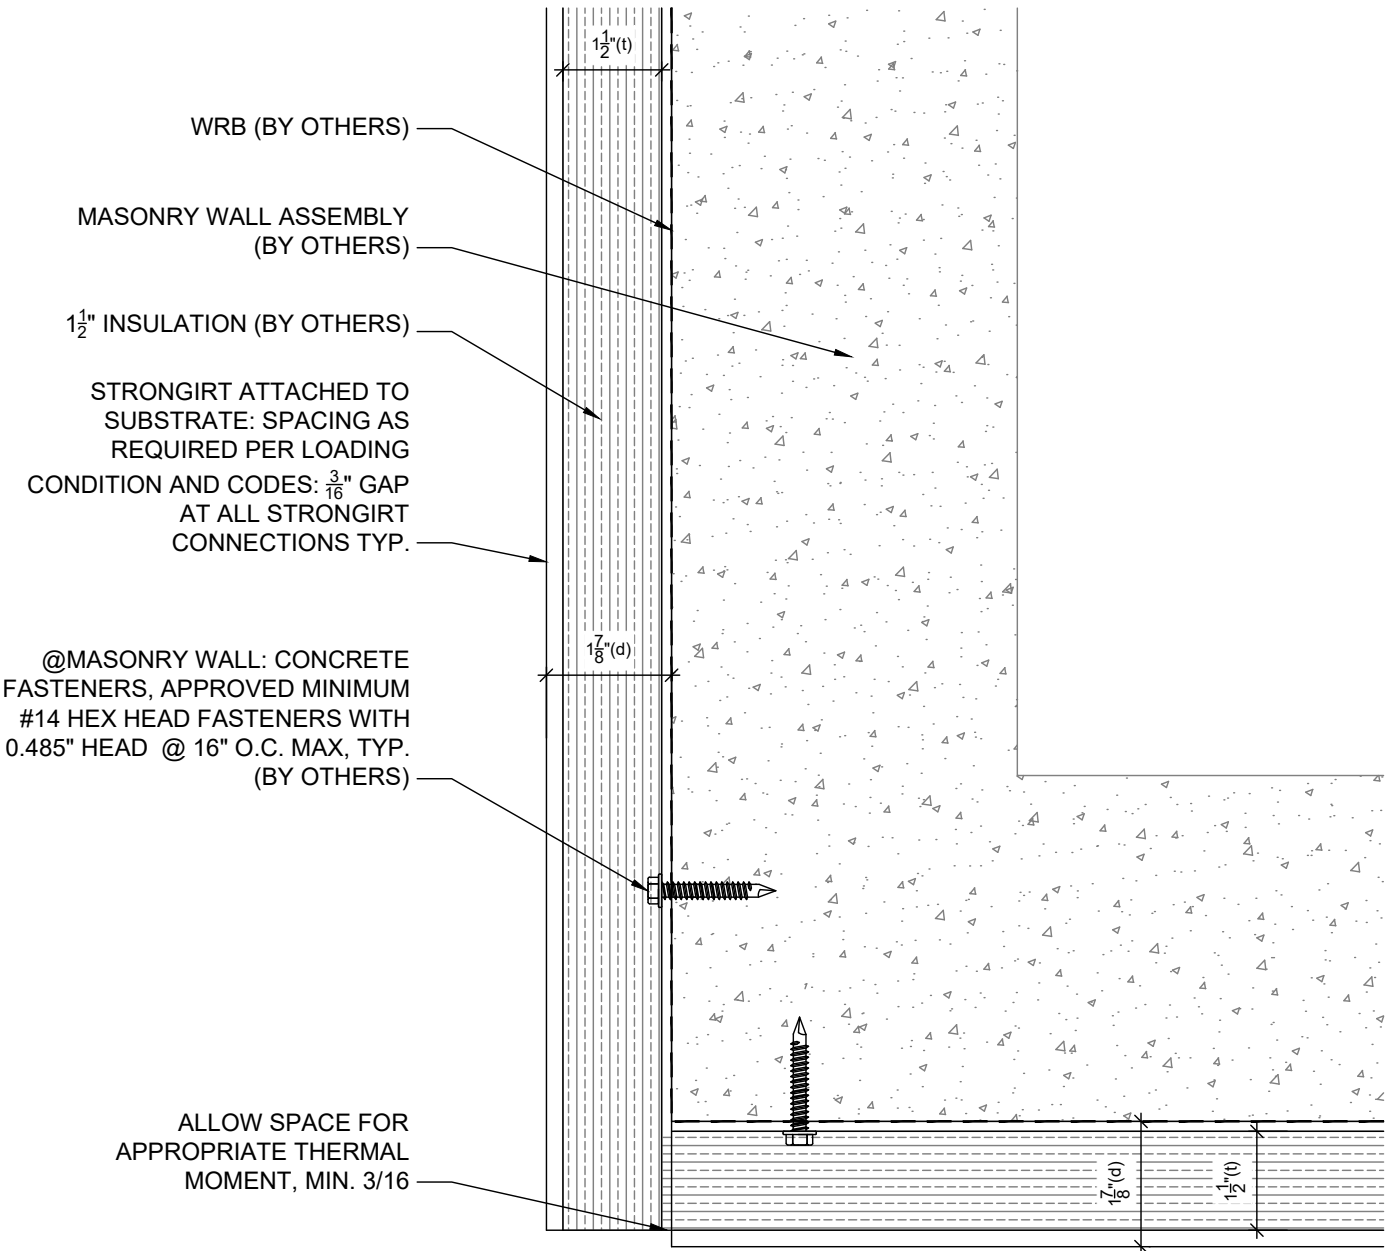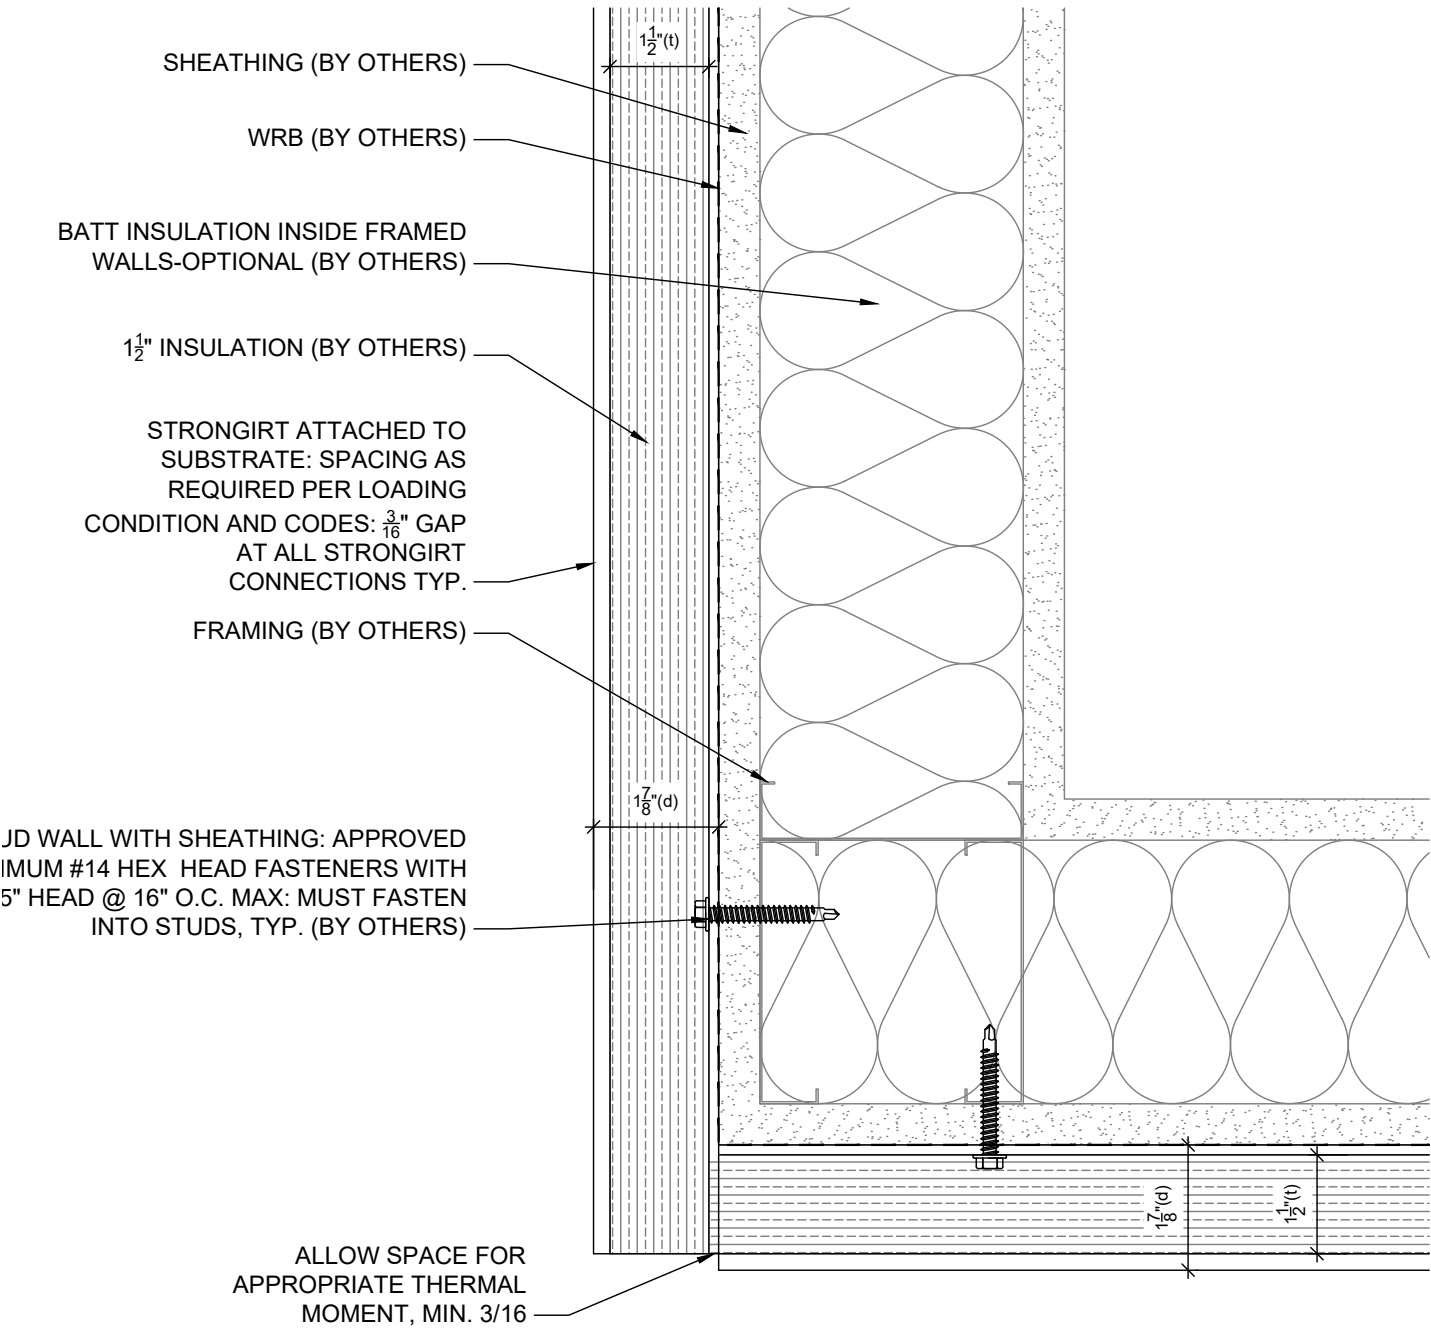



STRONGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	SOFFIT OUTSIDE DETAIL-1 NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	



NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.

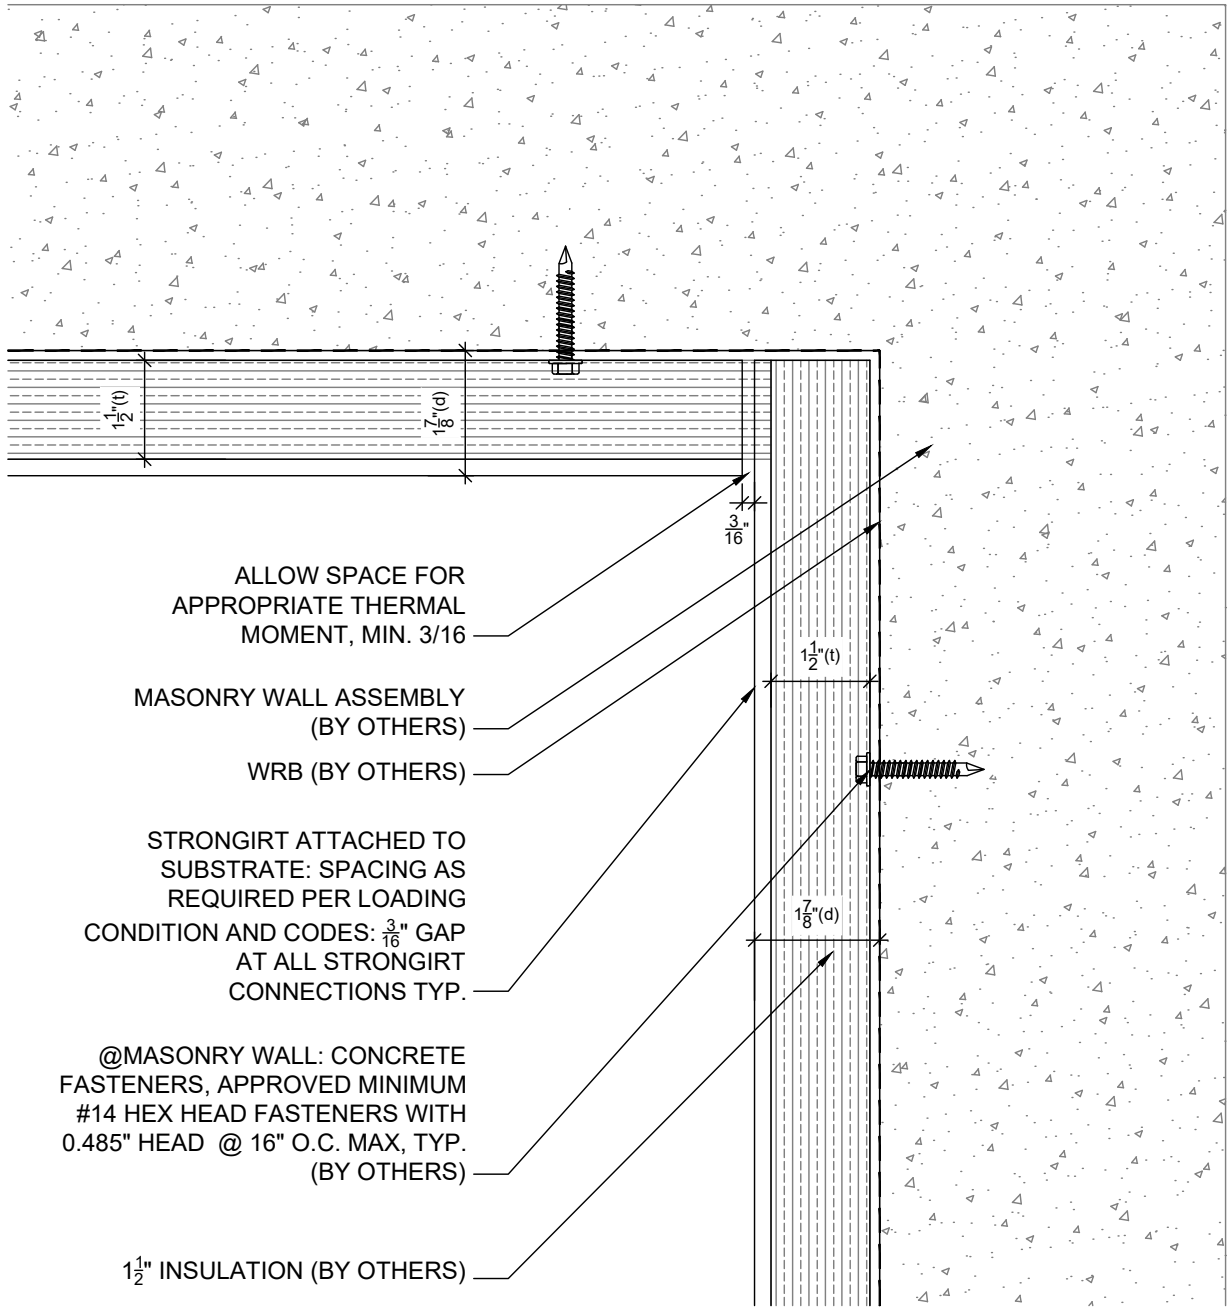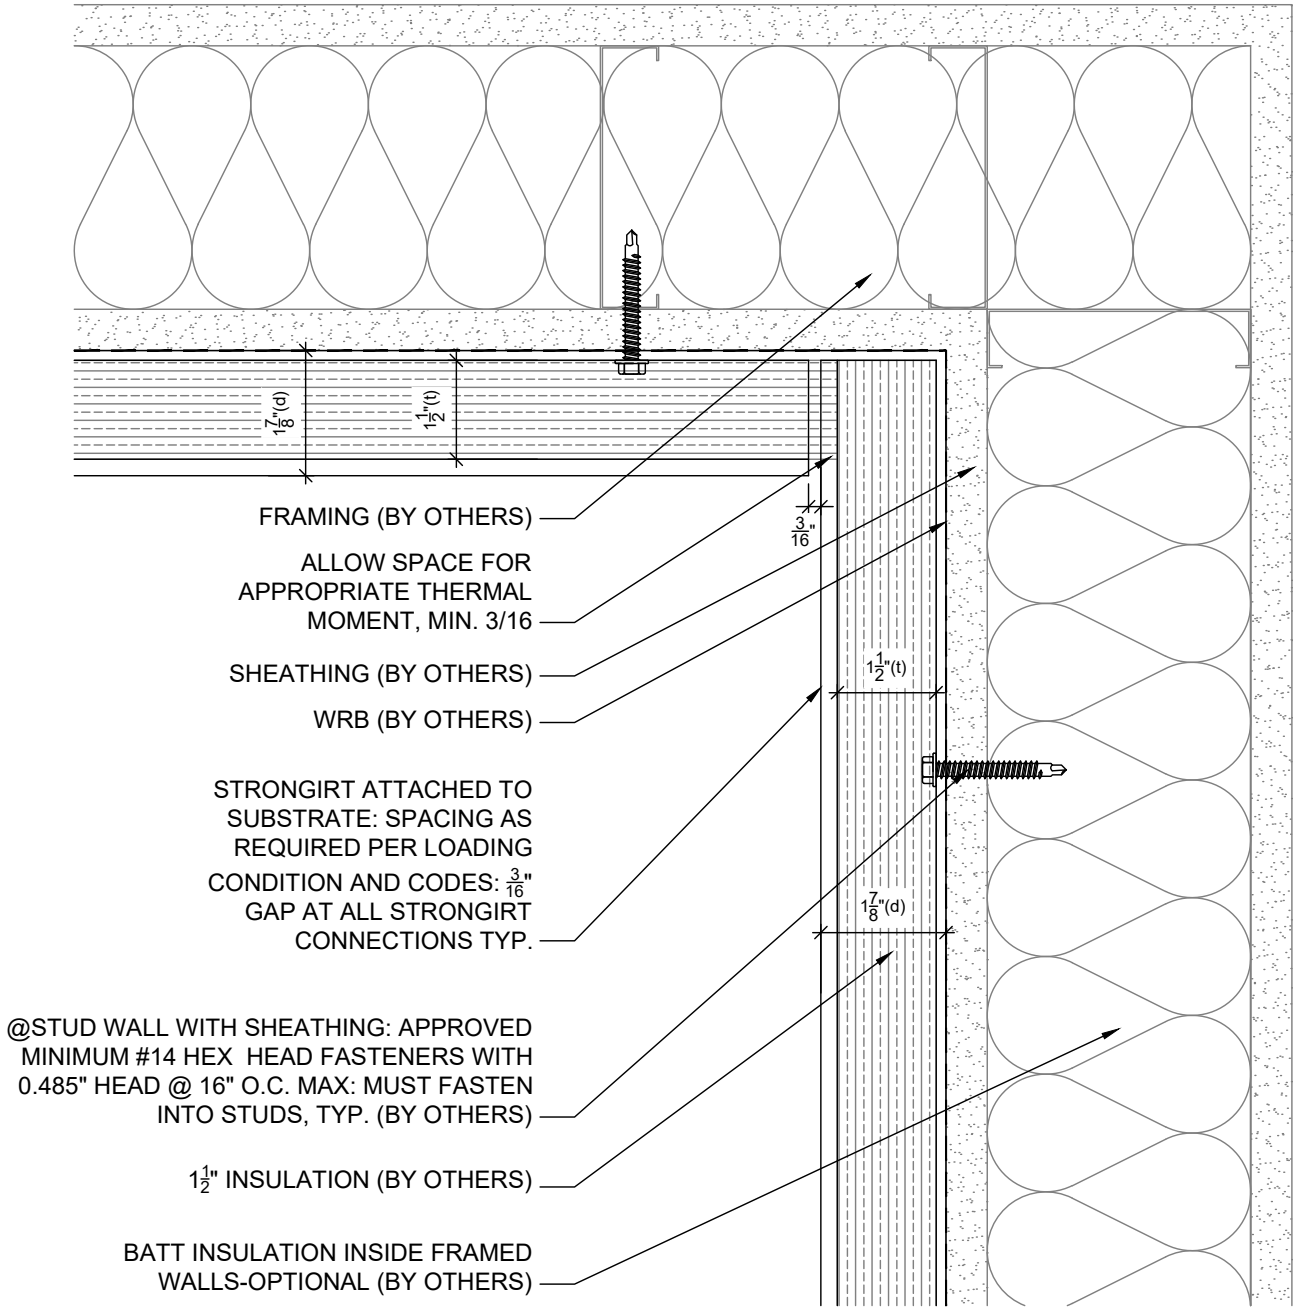


STRONGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	SOFFIT INSIDE DETAIL-1 NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	



NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.

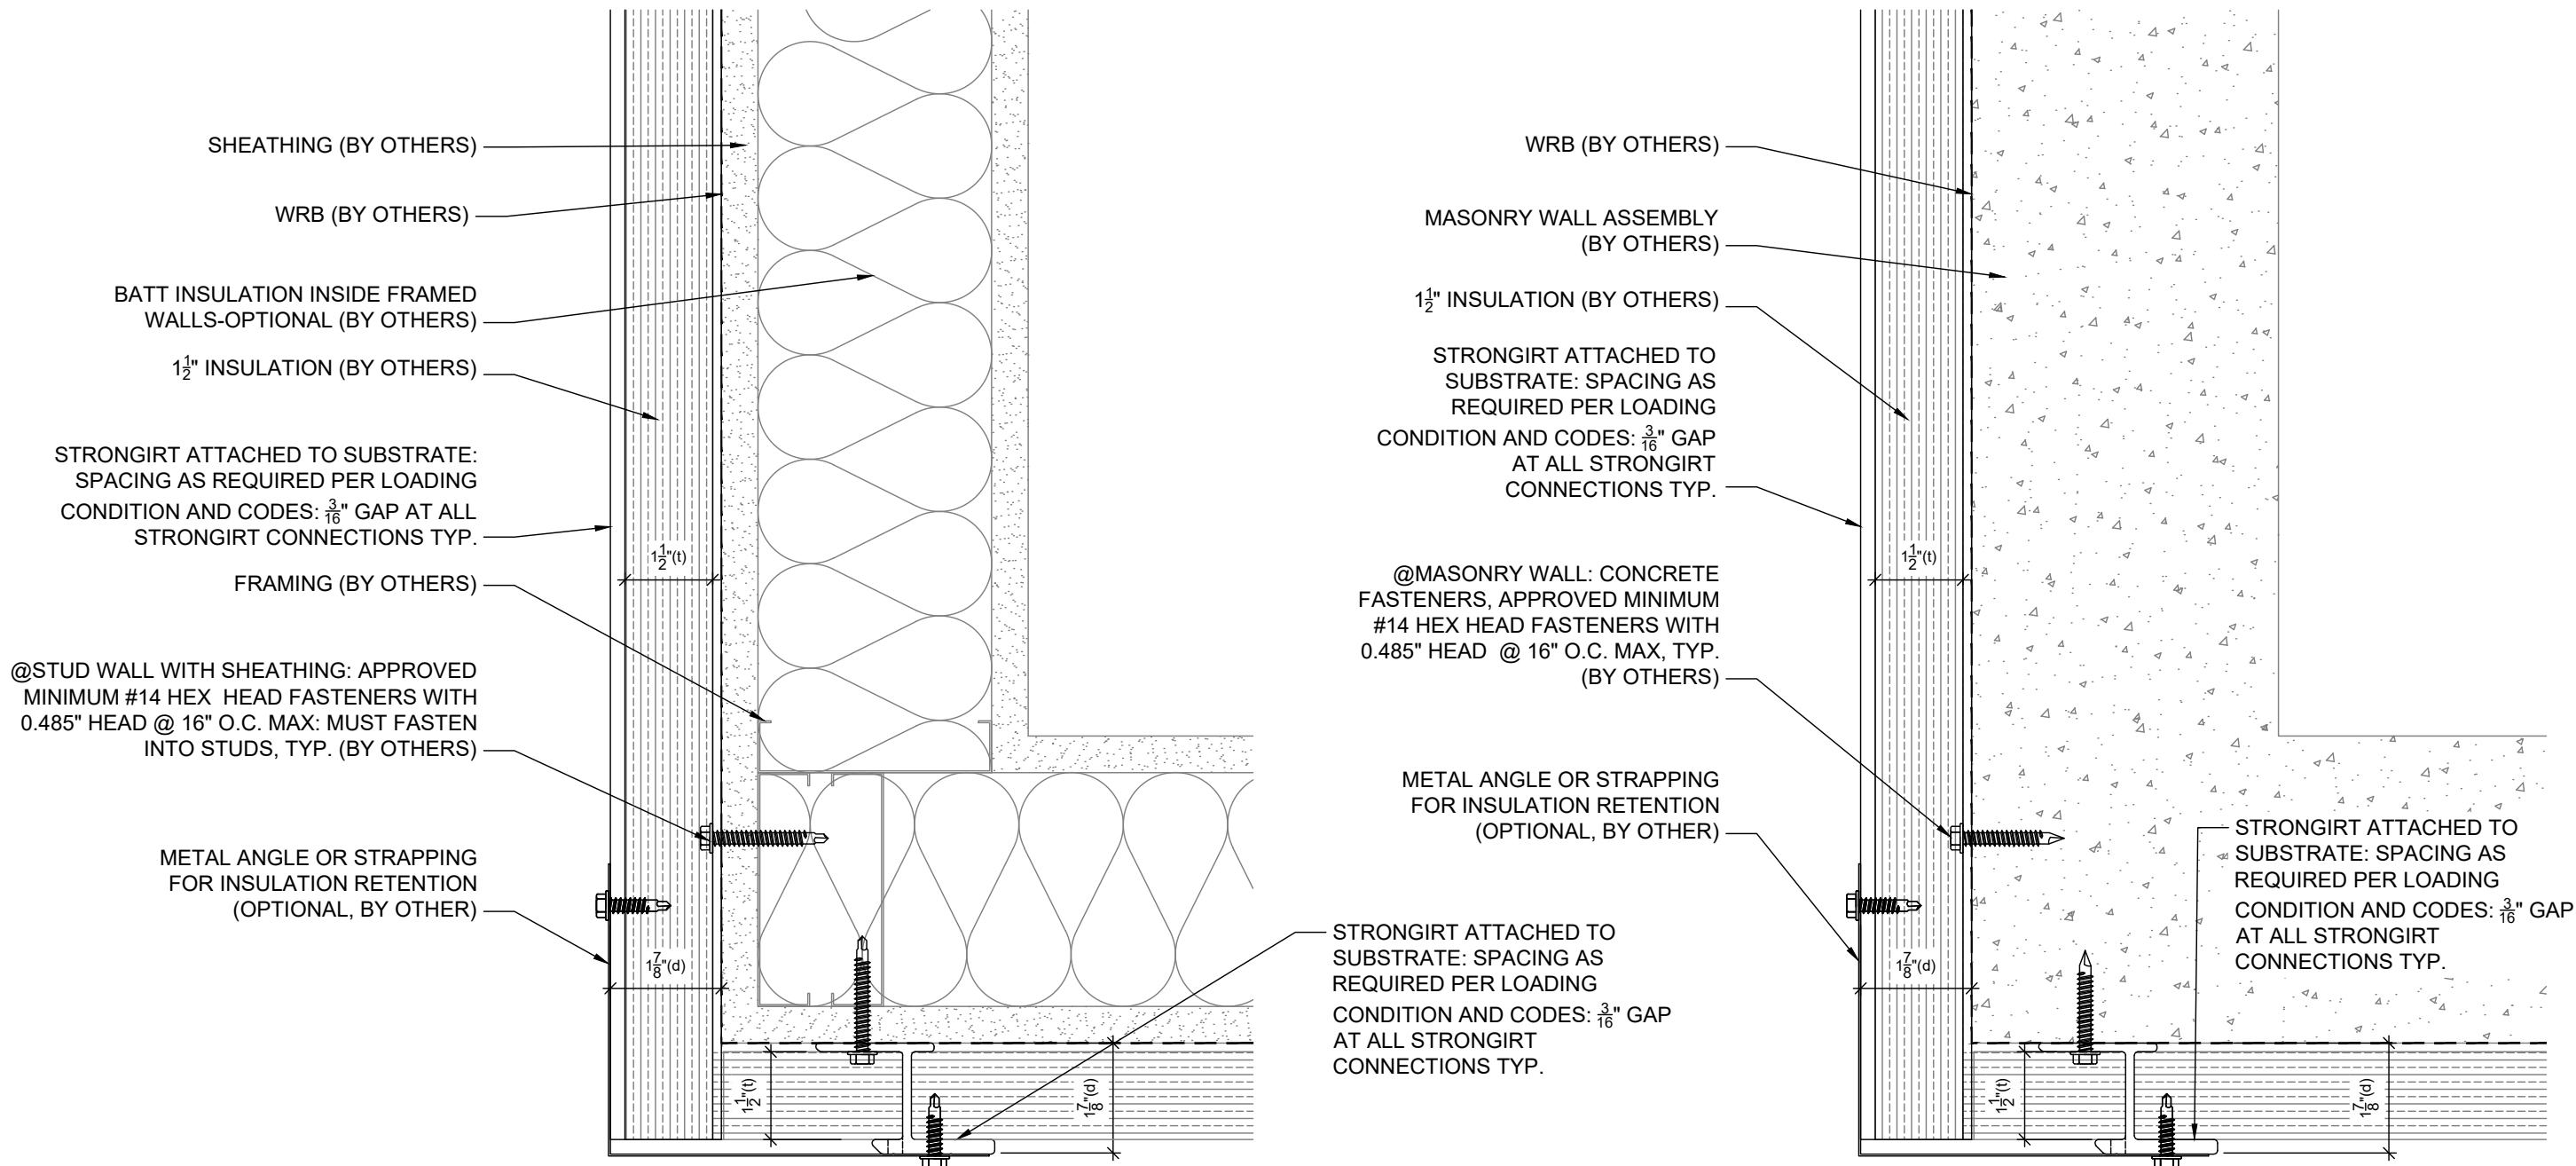



STRONGGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	SOFFIT OUTSIDE DETAIL-2 NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	



NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.

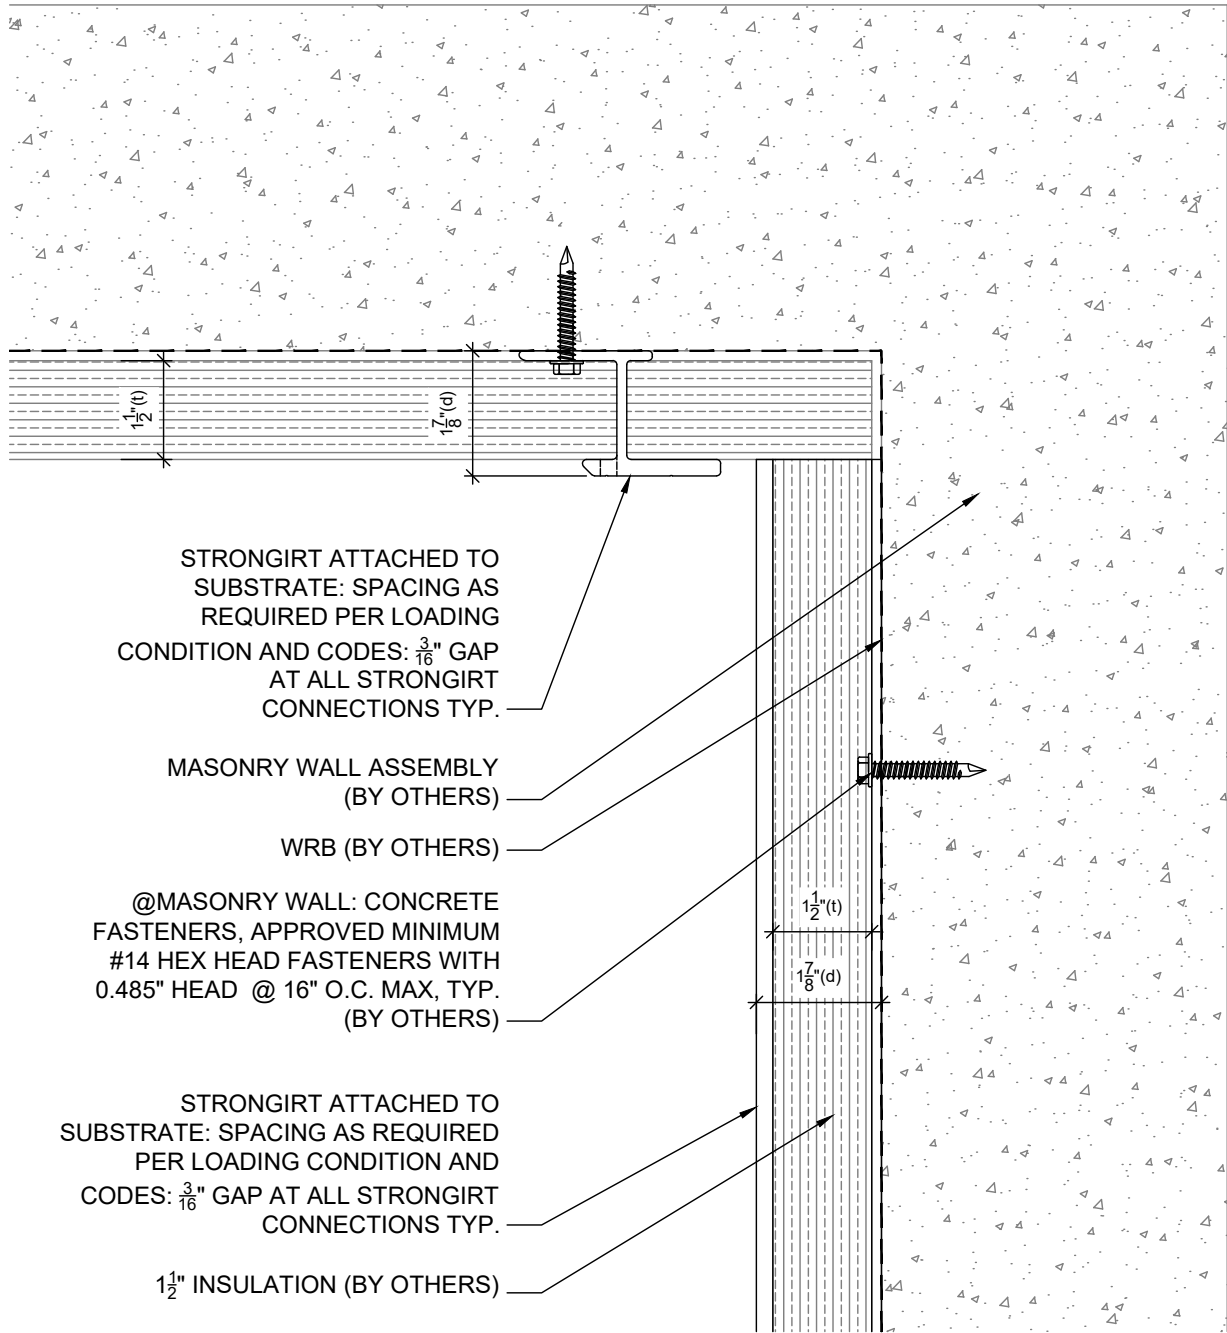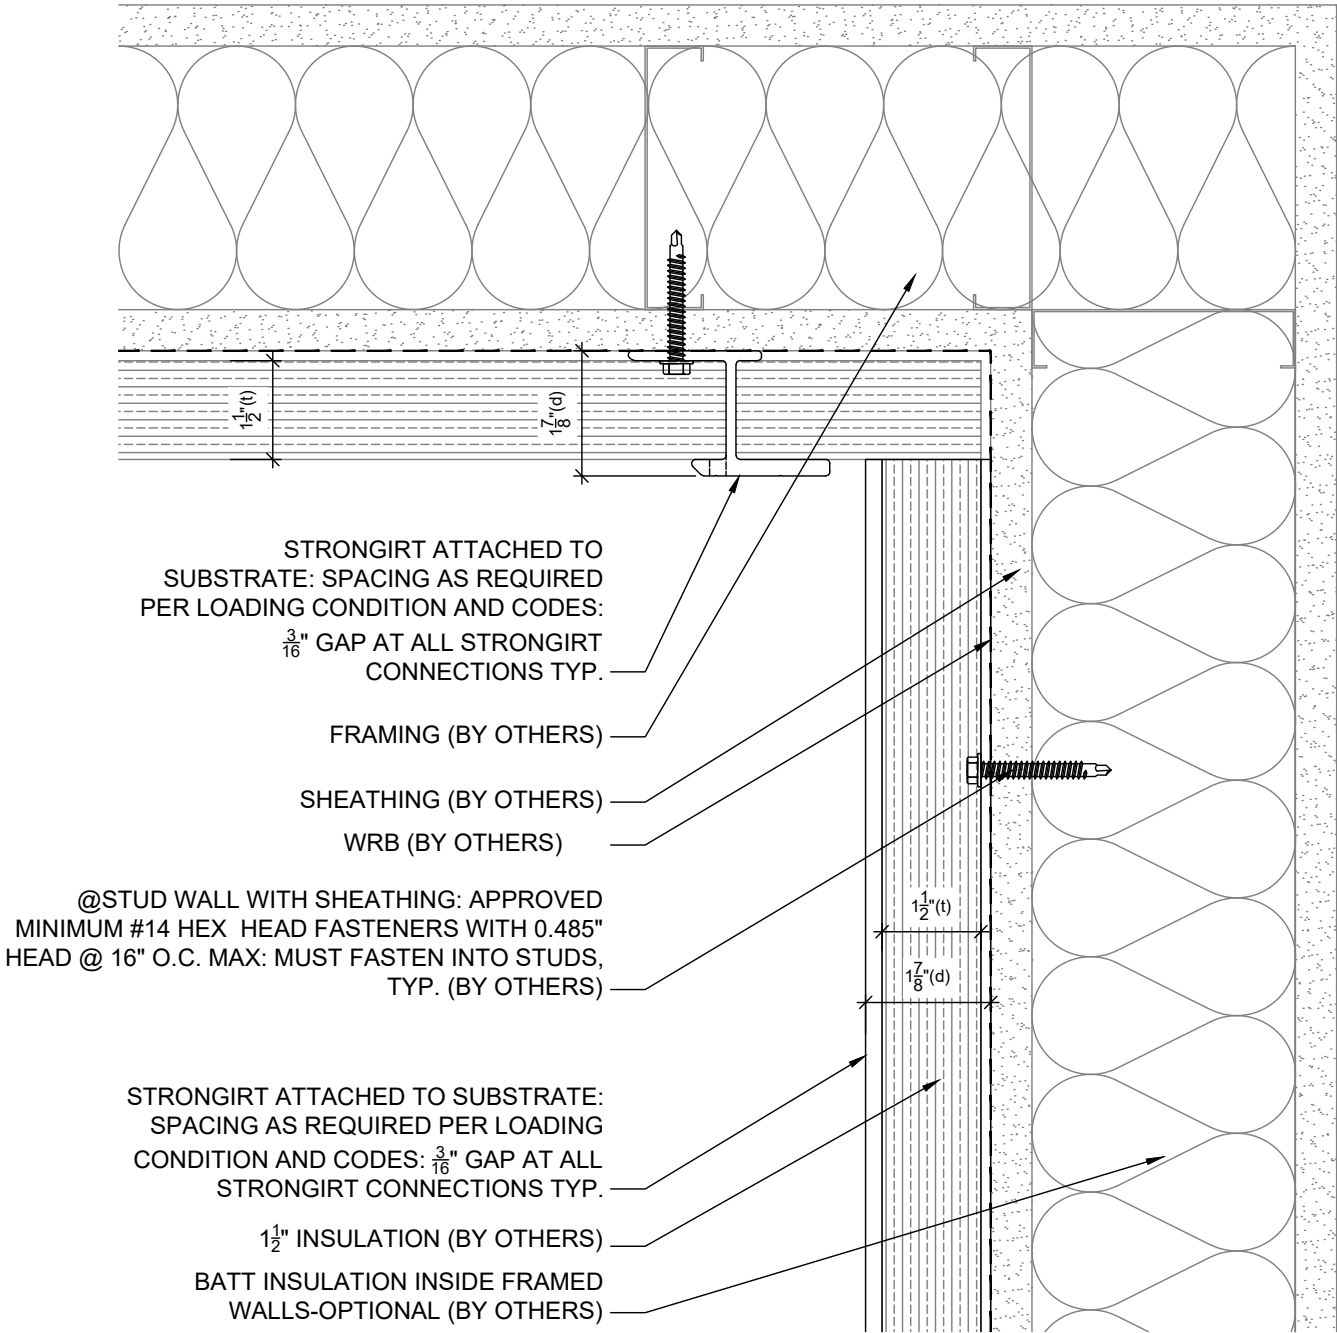



STRONGGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	SOFFIT INSIDE DETAIL-2 NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	



NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.

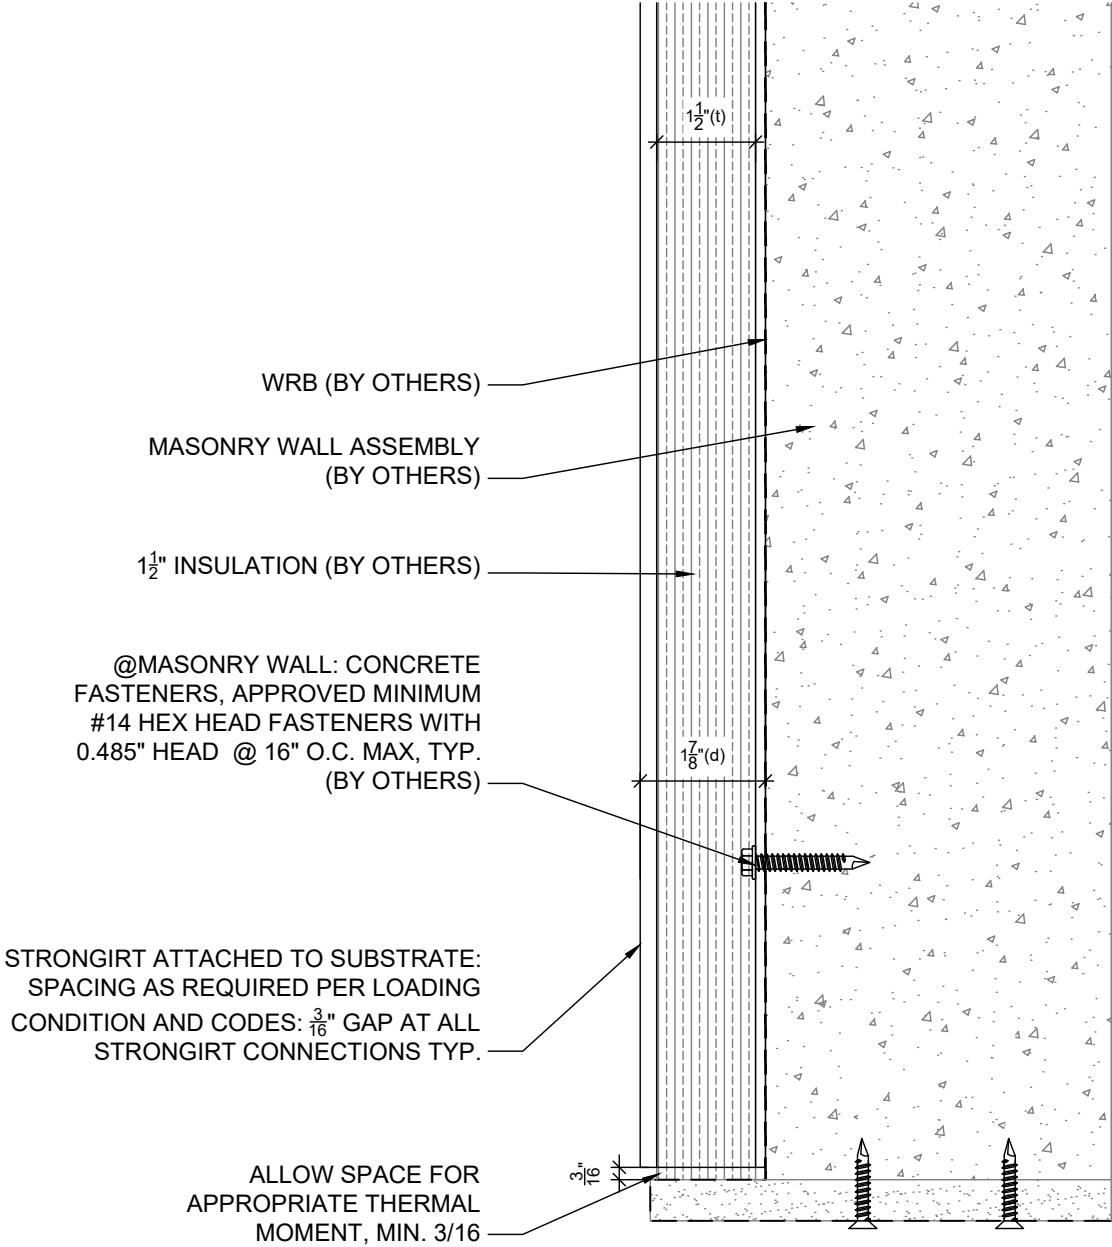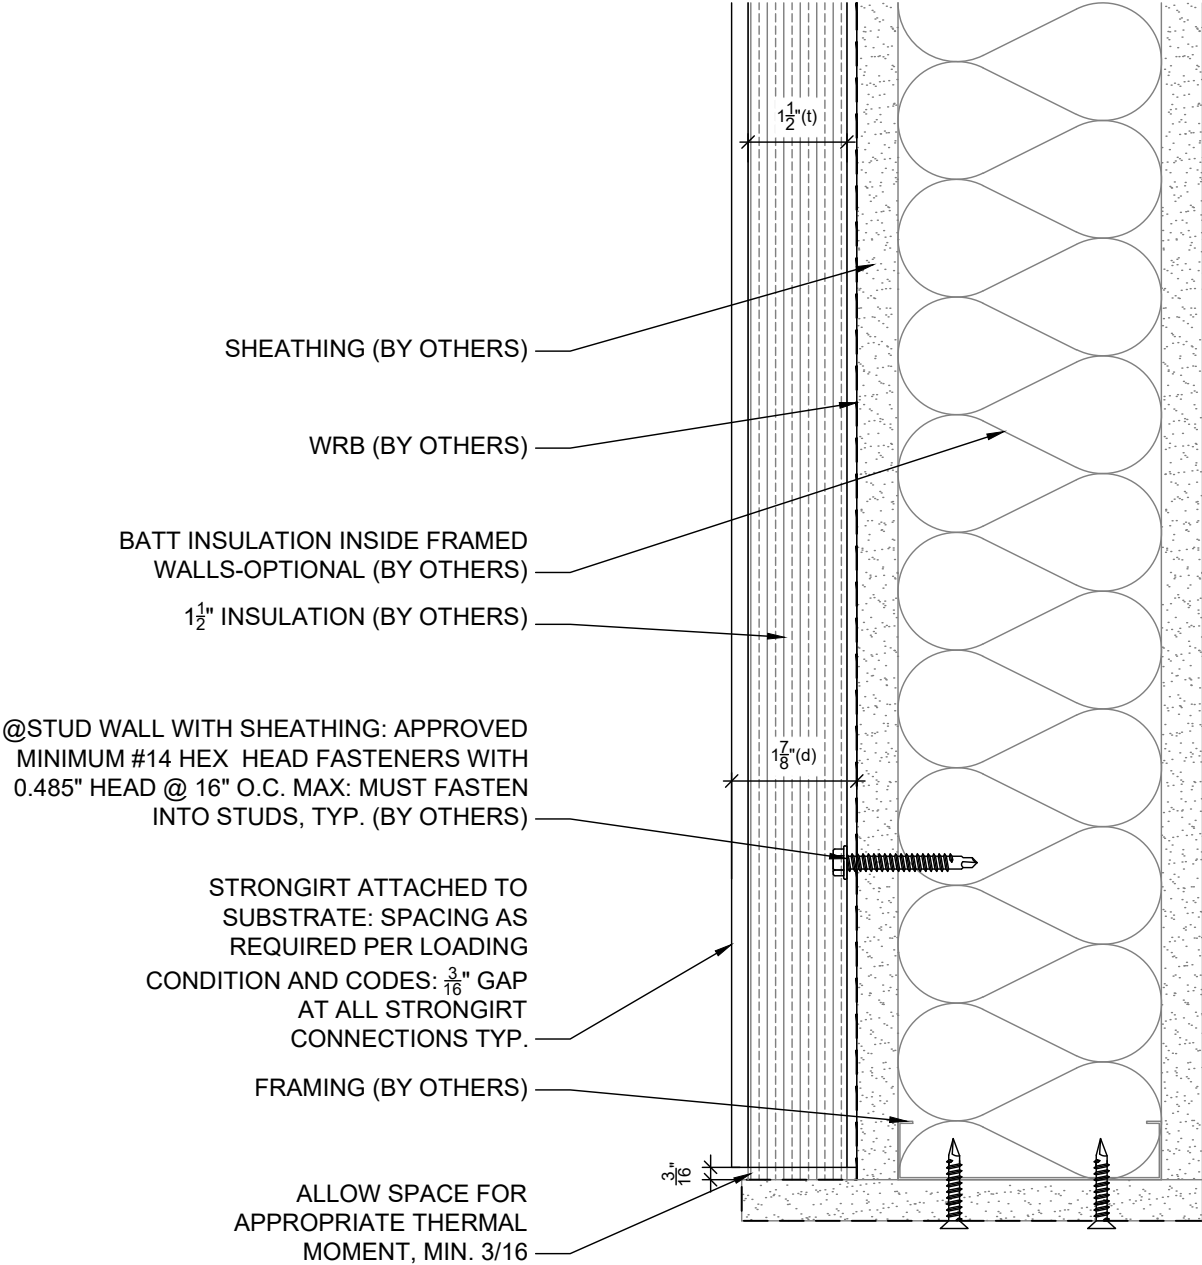



STRONGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW

INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	SOFFIT OUTSIDE DETAIL-3 NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	



NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.

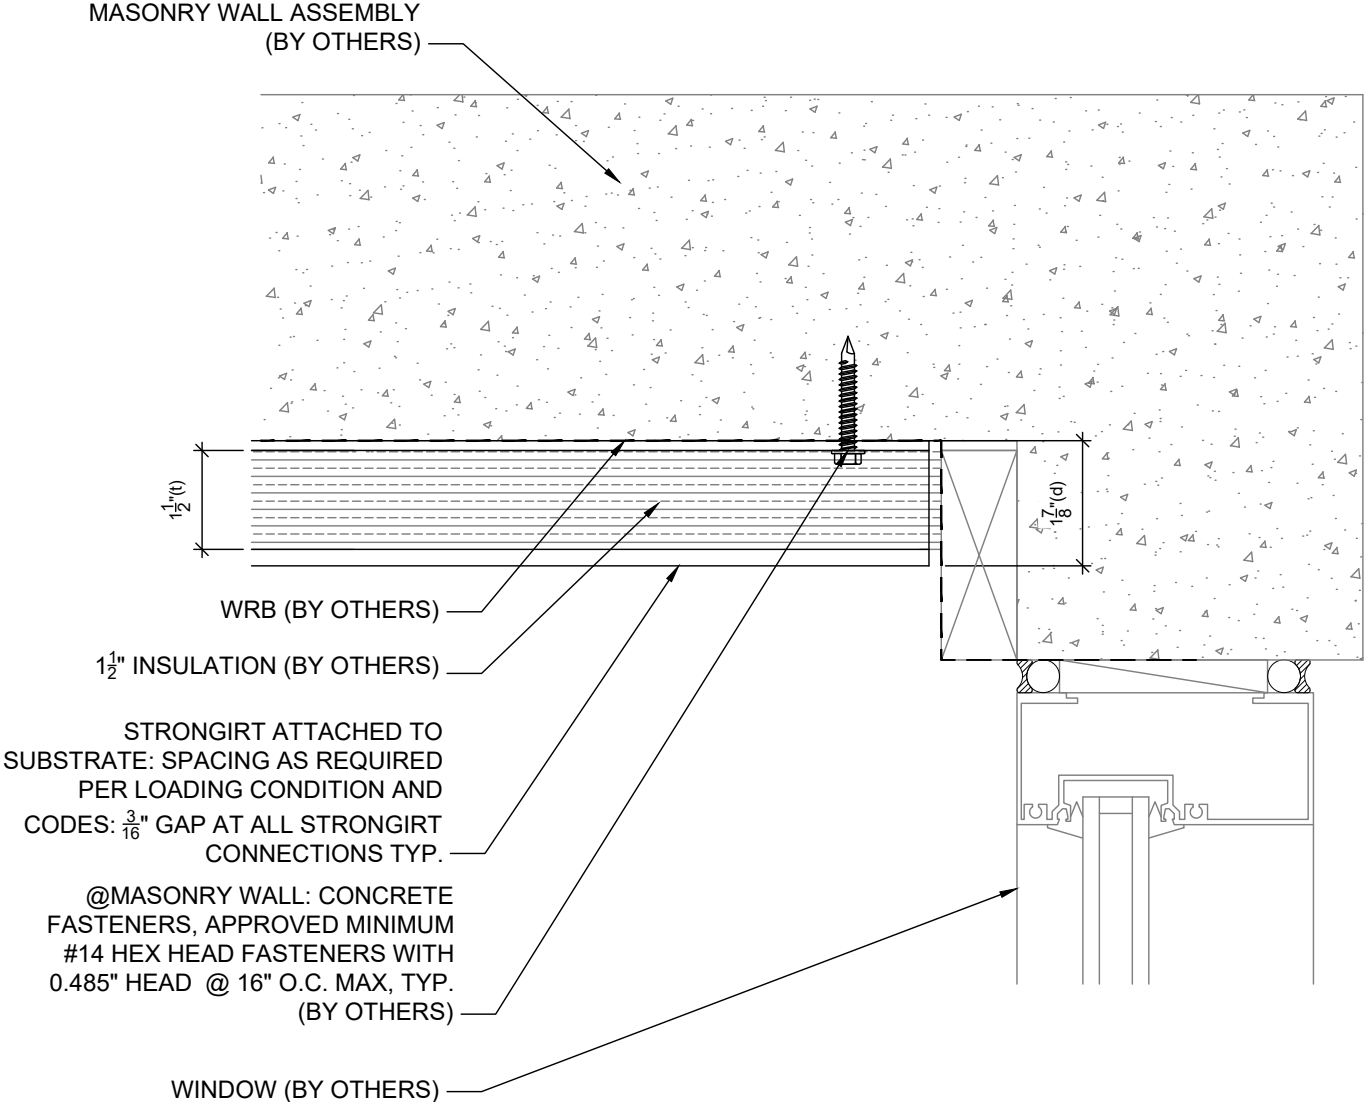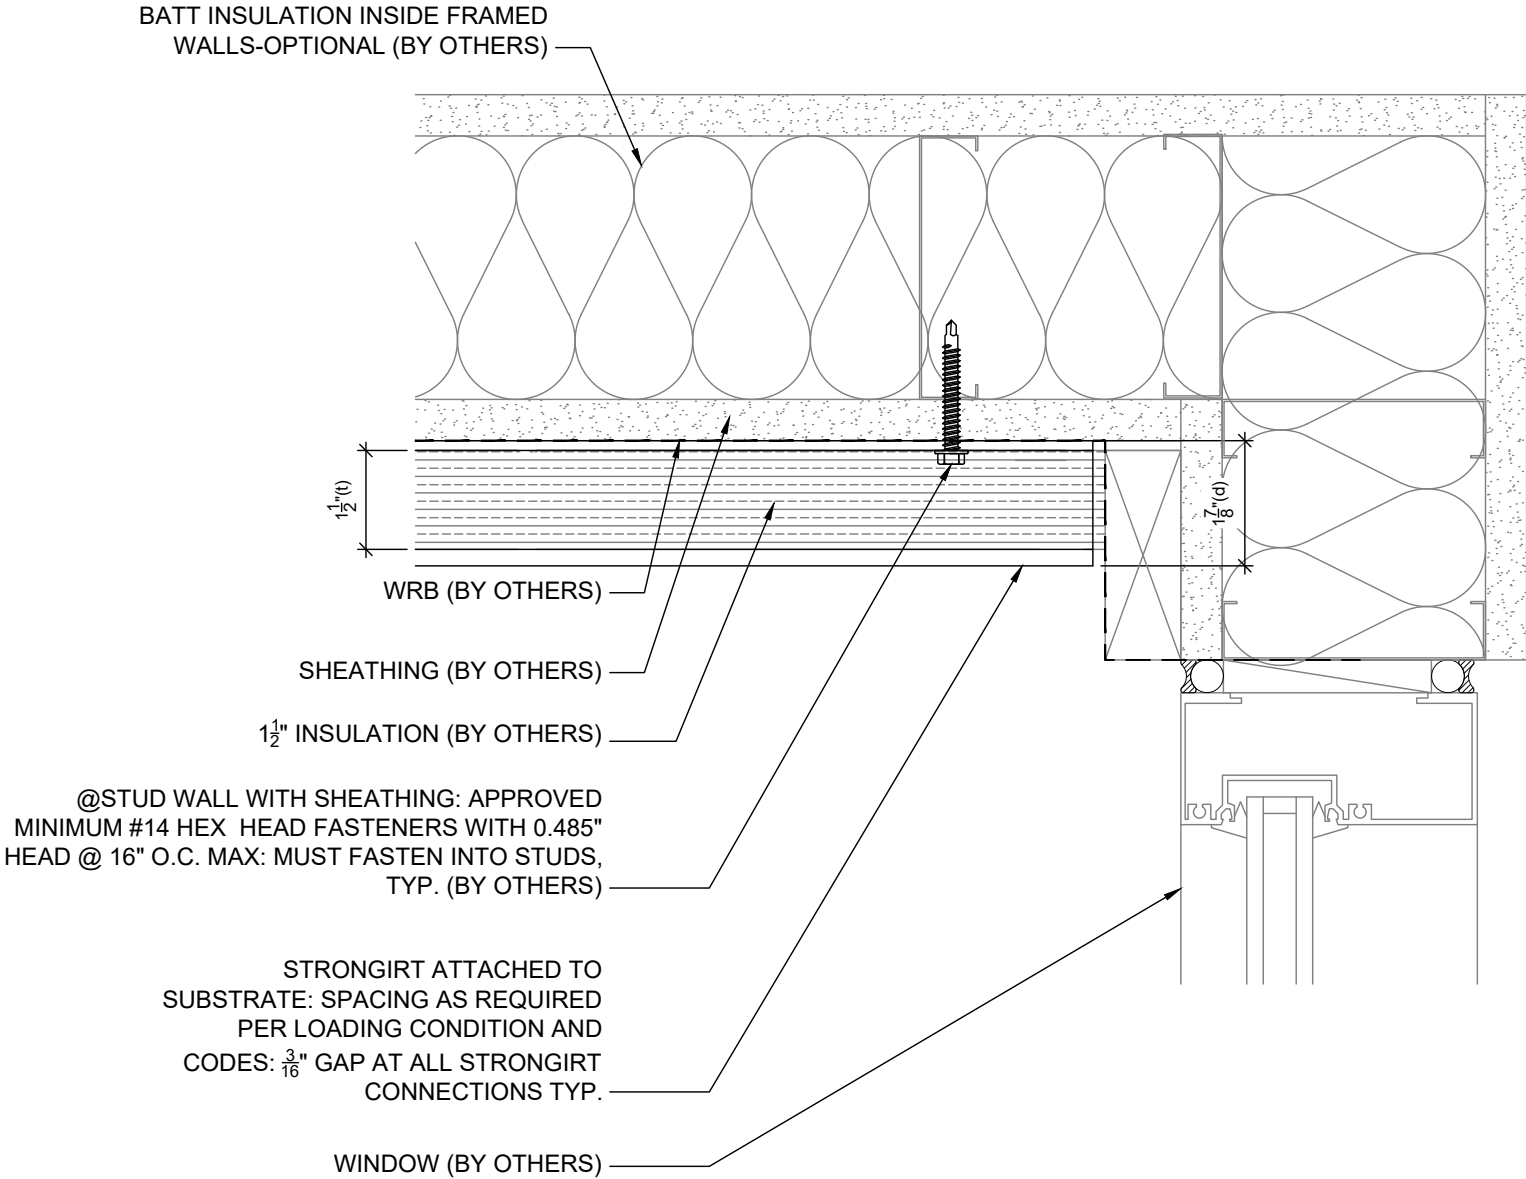

STRONGIRT PROFILES ARE DESIGNED TO ACCOMMODATE A RANGE OF INSULATION THICKNESS AS NOTED BELOW


INSULATION THICKNESS (t)	1.5" (38.1mm)	2" (50.8mm)	2.5" (63.5mm)	3" (76.2mm)	3.5" (88.9mm)	4" (101.6mm)	4.5" (114.3mm)	5" (127mm)	5.5" (139.7mm)	6" (152.4mm)	5.0"ULTRA (127mm)	5.5"ULTRA (127mm)	6.0"ULTRA (127mm)	8.0"ULTRA (127mm)
STRONGIRT DEPTH (d)	1.9" (48.3mm)	2.4" (61.0mm)	2.9" (73.7mm)	3.4" (86.4mm)	3.9" (99.1mm)	4.4" (111.8mm)	4.9" (124.5mm)	5.4" (137.2mm)	5.9" (149.9mm)	6.4" (162.6mm)	5.5" (140mm)	6.0" (152mm)	6.5" (165mm)	8.5" (216mm)

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	SOFFIT INSIDE DETAIL-3 NOT TO SCALE
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	


NOTE: DETAILS ARE PROVIDED FOR INFORMATION ONLY, AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC PROJECT ENGINEERING BY OTHERS WILL ADDRESS ATTACHMENT SPACING, ORIENTATION AND LOADING. CONTACT STRONGWELL FOR FURTHER DETAIL, AND TO INQUIRY ABOUT UPDATES AND REVISIONS.



INSULATION THICKNESS (t)	STRONGIRT DEPTH (d)
1.5" (38.1mm)	1.9" (48.3mm)
2" (50.8mm)	2.4" (61.0mm)
2.5" (63.5mm)	2.9" (73.7mm)
3" (76.2mm)	3.4" (86.4mm)
3.5" (88.9mm)	3.9" (99.1mm)
4" (101.6mm)	4.4" (111.8mm)
4.5" (114.3mm)	4.9" (124.5mm)
5" (127mm)	5.4" (137.2mm)
5.5" (139.7mm)	5.9" (149.9mm)
6" (152.4mm)	6.4" (162.6mm)
5.0"ULTRA (127mm)	5.5" (140mm)
5.5"ULTRA (127mm)	6.0" (152mm)
6.0"ULTRA (127mm)	6.5" (165mm)
8.0"ULTRA (127mm)	8.5" (216mm)

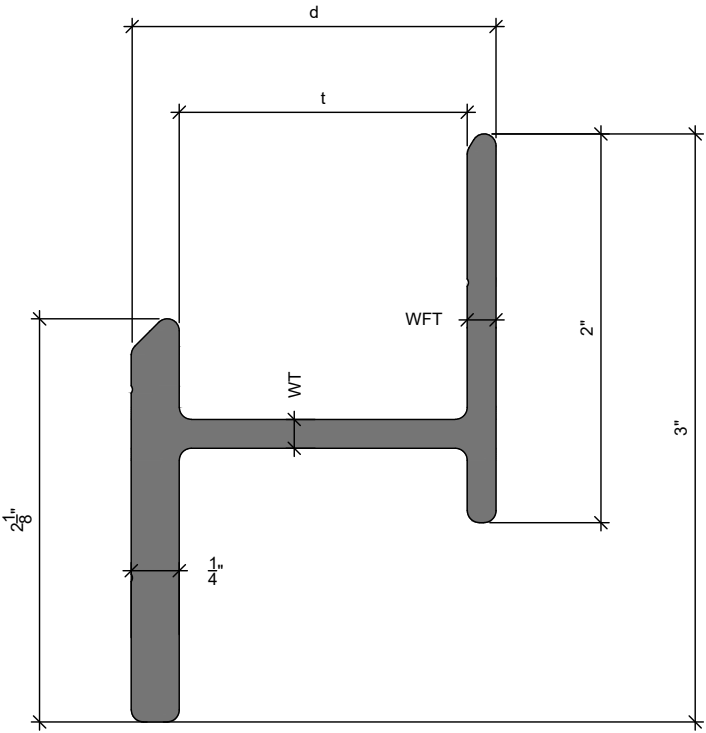

STRONG GIRT

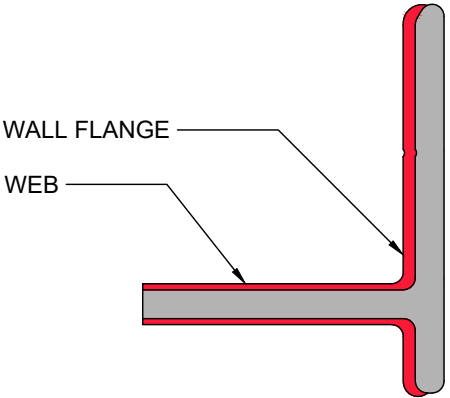

STRONG GIRT ULTRA

SUBSTRATE: SHEATHING / MASONRY	INSULATION: BY OTHERS (ALL)	STRONGIRT AND ULTRA STRONGIRT 1'-0"=1'-0"
CLADDING:---	DATE: 01-25-2023	
	GIRT ORIENTATION: VERTICAL	