





ADJUSTABLE PEDESTAL


LAYOUT GUIDE FOR FIBERGLASS GRATING




This is a user guide for common widths and lengths of grating to be supported by Strongwell adjustable pedestals. In all conditions of loading and/or combination of loading and grating widths, the grating load table shall apply.




PEDESTAL DRAWINGS

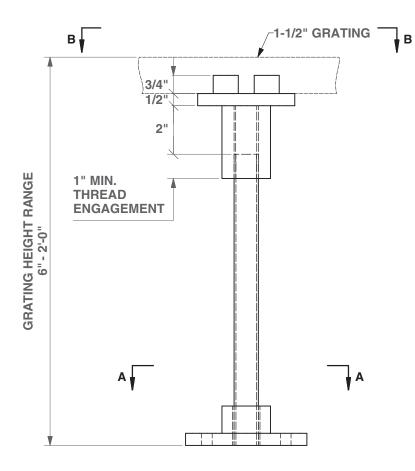









MOLDED GRATING PANEL CONNECTIONS



One





Two






Three

1" THICK DURAGRATE® SQUARE MESH MOLDED GRATING


60 psf live load or 300 lb point load (non-concurrent)

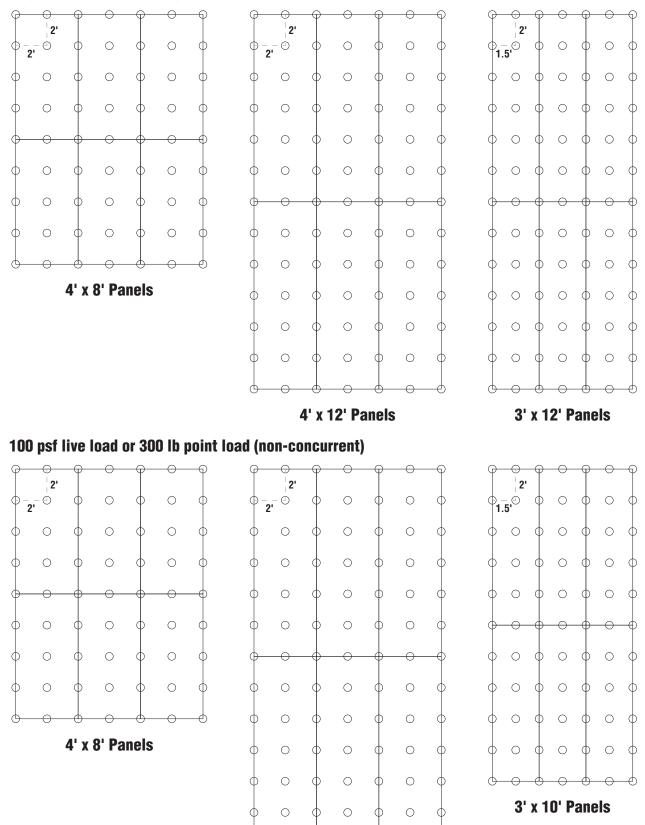

4' x 12' Panels

Φ


1-1/2" THICK DURAGRATE® SQUARE MESH MOLDED GRATING

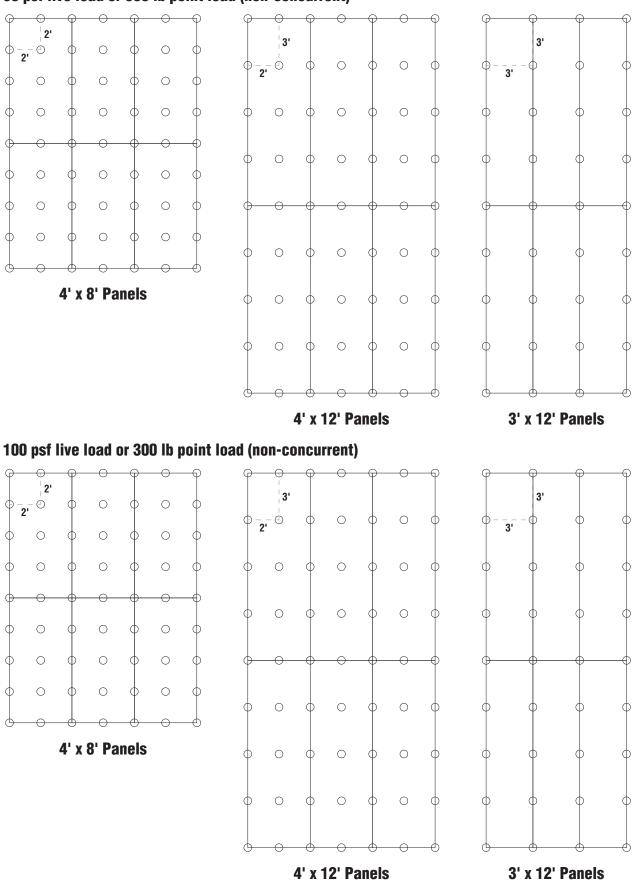

60 psf live load or 300 lb point load (non-concurrent)


2" THICK DURAGRATE® SQUARE MESH MOLDED GRATING



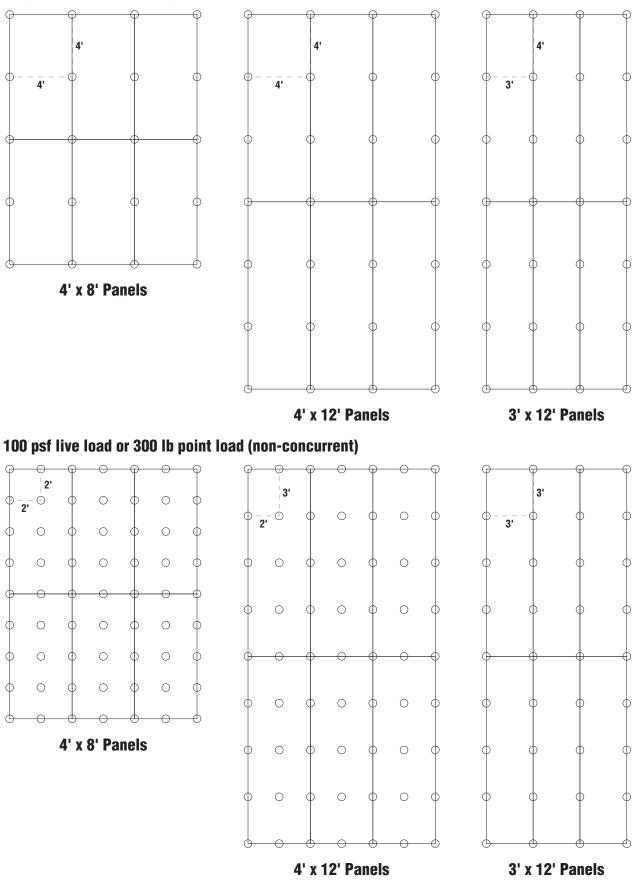


2" THICK DURAGRATE® SQUARE MESH MOLDED GRATING

500 psf live load or 300 lb point load (non-concurrent)

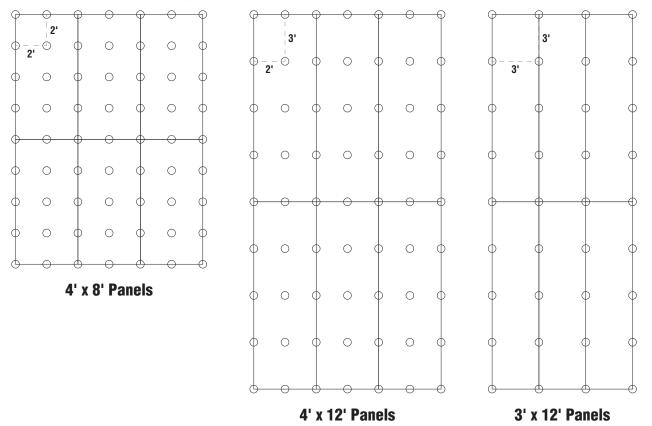

1-1/2" THICK DURADEK® I-6500 PULTRUDED GRATING

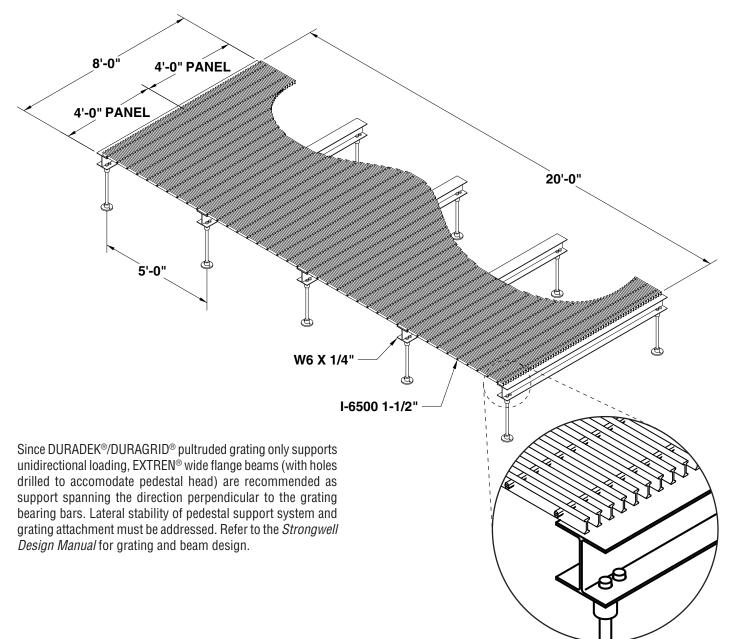

60 psf live load or 300 lb point load (non-concurrent)

5





ISO 9001 Quality Certified Manufacturing Plants

BRISTOL LOCATION

400 Commonwealth Ave. Bristol, VA 24201 USA (276) 645-8000 CHATFIELD LOCATION 1610 Highway 52 South Chatfield, MN 55923 USA (507) 867-3479

www.strongwell.com

ST0720 © 2020 Strongwell