

SECTION 12 - FIBERGLASS GRATING

Table of Contents

DURAGRATE® Molded Fiberglass Grating

Introduction to DURAGRATE® / How to Specify.....	12-2
DURAGRATE® Uniform Load/Deflection Table.....	12-3, 12-4
DURAGRATE® Concentrated Line Load/Deflection Table	12-5, 12-6
DURAGRATE® Concentrated Point Load/Deflection Table.....	12-7, 12-8

PULTRUDED FIBERGLASS GRATING

Introduction to DURADEX®	12-9
Introduction to DURAGRID® & DURAGRID® Phenolic	12-10
Evolution of Pultruded Grating.....	12-11, 12-12
Pultruded Grating Panel Sizes & Availability	12-13
DURAGRID® Stair Treads & Landings and Fasteners	12-14

DURADEX® Pultruded Fiberglass Grating

How to Specify DURADEX®	12-15
DURADEX® Uniform Load/Deflection Table.....	12-16
DURADEX® Concentrated Load/Deflection Table.....	12-17

DURAGRID® Pultruded Fiberglass Grating



How to Specify DURAGRID®	12-18
DURAGRID® I-Bar Simple Specs.....	12-19
DURAGRID® T-Bar Simple Specs.....	12-20
DURAGRID® HD Simple Specs.....	12-21
DURAGRID® R-Bar Simple Specs	12-22

DURAGRID® Phenolic Pultruded Fiberglass Grating

How to Specify DURAGRID® Phenolic Grating	12-23
DURAGRID® Uniform Load/Deflection Table	12-24, 12-25
DURAGRID® Concentrated Load/Deflection Table	12-26, 12-27

SECTION 12

FIBERGLASS GRATING

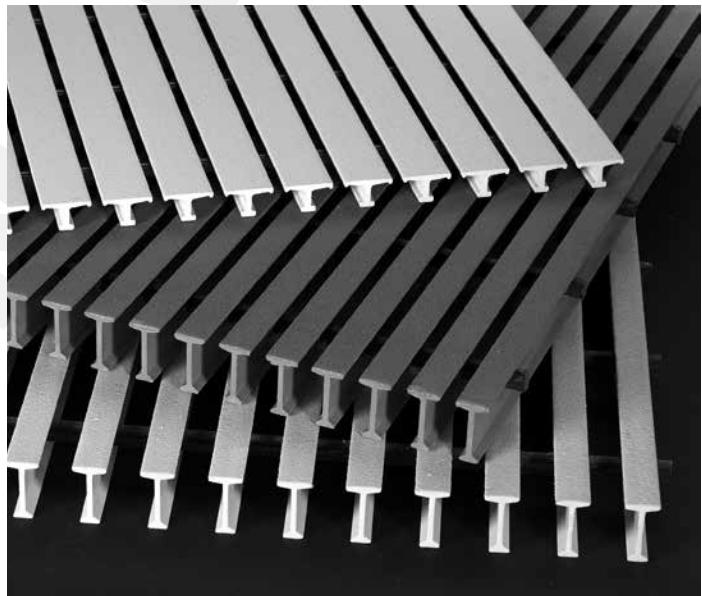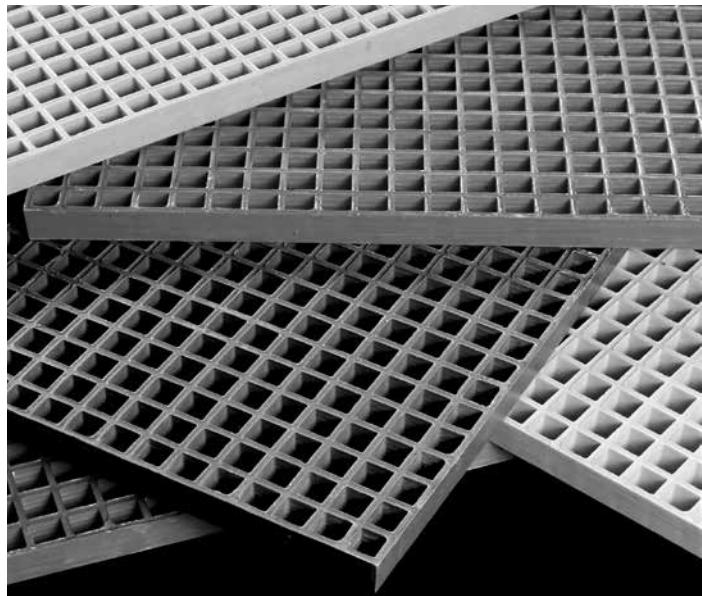

Look for this blue line in the left margin of the Design Manual documents. This line shows you where the latest update has been made.

DURAGRATE® MOLDED FIBERGLASS GRATING

INTRODUCTION TO DURAGRATE®

DURAGRATE® molded fiberglass grating is a premium-quality mesh grating panel made exclusively in the U.S.A. While molded grating is a chemical resistant flooring choice for many industrial applications, DURAGRATE® offers performance and quality superior to imported suppliers.

DURAGRATE® panels are molded in one piece and feature a concave non-slip walking surface. The panels allow for efficient on-site cutting to minimize grating waste. Load bearing bars in both directions allow for use without continuous side support.

DURAGRATE® molded fiberglass grating weighs significantly less than metal gratings while a high resin content provides excellent corrosion resistance which requires very little maintenance. A high glass content offers greater stiffness and strength resulting in a higher safety factor. DURAGRATE® molded fiberglass grating is composed of fiberglass rovings combined with a thermosetting resin. All of the resins contain a UV inhibitor. Standard DURAGRATE® grating has a concave profile on the upper surface for skid resistance. Grit tops are available upon request. Standard colors are dark gray, green, yellow, orange, red, and light gray. Custom colors are available upon request.

RESIN SYSTEMS AVAILABLE

	RESIN CODE	DESCRIPTION	RESIN BASE	CORROSION RESISTANCE	FLAME SPREAD INDEX**	SMOKE-DEVELOPED INDEX**
STANDARD	VE	Chemical Proof Fire Retardant	Vinyl Ester	Excellent	Class A, 25 or less	Class A, 450 or less
	ISO	Industrial Grade Fire Retardant	Isophthalic	Very Good	Class A, 25 or less	Class A, 450 or less
	FF	Food Grade Fire Retardant	Isophthalic	Very Good	Class A, 25 or less	Class A, 450 or less

** Per ASTM E-84 Tunnel Test. DURAGRATE® panels are tested with the flame impinging the top side of the panel and separately with the flame impinging the bottom side of the panel. This ensures Class A performance is met in both configurations.

Corrosion information for these resins is listed in Section 22 — CORROSION RESISTANCE GUIDE.

HOW TO SPECIFY DURAGRATE®

The molded fiberglass grating shall be DURAGRATE® as supplied by Strongwell. Grating panels shall be manufactured in the U.S.A. according to the standards set by the Fiberglass Grating Manufacturers Council (FGMC). Grating panels shall be (pick one from chart for thickness, mesh pattern, resin code) molded grid pattern. The grating shall be one-piece construction with the tops of the bearing bars and cross bars in the same plane. Surface shall be concave top or gritted.


SHAPES, SIZES, AND AVAILABILITY

Standard DURAGRATE® Panels							
THICKNESS (mm)	MESH PATTERN (mm)	PANEL SIZE (m)	A (PER M OF WIDTH)	I (PER M OF WIDTH)	S (PER M OF WIDTH)	OPEN AREA	APPROX. WEIGHT
25.4	50.8 Square	1.22 x 3.66	3.05 x 10 ³ mm ²	1.64 x 10 ⁵ mm ⁴	1.29 x 10 ⁴ mm ³	72%	11.8 kg/m ²
25.4	38.1 Square	0.91 x 3.05 1.22 x 3.66	3.62 x 10 ³ mm ²	1.91 x 10 ⁵ mm ⁴	1.56 x 10 ⁴ mm ³	70%	12.7 kg/m ²
25.4	25.4 x 101.6 Rectangular	0.91 x 3.05 1.22 x 3.66	5.44 x 10 ³ mm ²	3.00 x 10 ⁵ mm ⁴	2.31 x 10 ⁴ mm ³	69%	13.7 kg/m ²
25.4	19.05 x 101.6 Rectangular	1.22 x 3.66	8.13 x 10 ³ mm ²	4.37 x 10 ⁵ mm ⁴	3.44 x 10 ⁴ mm ³	63%	14.2 kg/m ²
38.1	38.1 Square	0.91 x 3.05 1.22 x 3.66 1.52 x 3.05 1.52 x 3.66	6.03 x 10 ³ mm ²	6.96 x 10 ⁵ mm ⁴	3.49 x 10 ⁴ mm ³	70%	18.6 kg/m ²
38.1 Mini Mesh	19.05 x 19.05 on Center (Top), 38.1 x 38.1 on Center (Bottom)	1.22 x 3.66	7.98 x 10 ³ mm ²	9.75 x 10 ⁵ mm ⁴	4.26 x 10 ⁴ mm ³	44%	22.0 kg/m ²
38.1	25.4 x 50.8 Rectangular HD	1.22 x 1.83	13.72 x 10 ³ mm ²	16.59 x 10 ⁵ mm ⁴	8.71 x 10 ⁴ mm ³	51%	29.5 kg/m ²
50.8	50.8 Square	1.22 x 3.66	6.09 x 10 ³ mm ²	13.11 x 10 ⁵ mm ⁴	5.05 x 10 ⁴ mm ³	72%	19.5 kg/m ²

NOTE: Custom panel sizes and resins are available upon request. Descriptions of available resin systems are located on the previous page. Please contact Sales Director or Account Manager for assistance.

DURAGRATE® UNIFORM LOAD / DEFLECTION

LOAD TABLES FOR STANDARD RESIN SYSTEMS

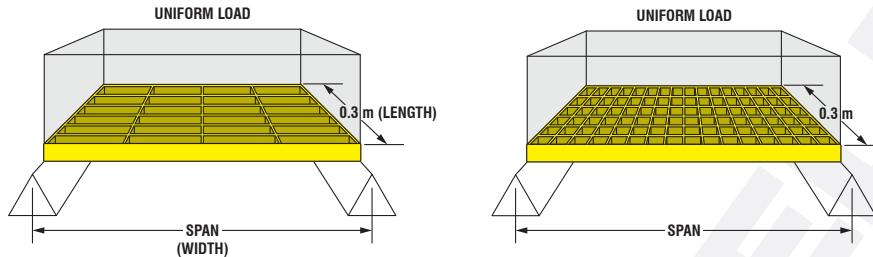

LOAD in KG / SQUARE METER (KG/M²)

SPAN (m)	STYLE (mm)		293	488	732	976	1221	2442	4882	9764	MAXIMUM RECOMMENDED LOAD (KG/M)	APPARENT EI (10 ⁹ N-CM ²) / METER of WIDTH
	DEPTH	MESH										
0.30	25.4	50.8 x 50.8	0.25	0.25	0.51	0.51	0.76	1.52	2.79		1845	0.02
	25.4	38.1 x 38.1	<0.25	0.25	0.25	0.51	0.51	1.02	2.03		2678	0.03
	25.4	25.4 x 101.6	<0.25	0.25	0.25	0.51	0.51	1.02	2.03		2916	0.03
	25.4	101.6 x 19.05	<0.25	0.25	0.25	0.25	0.25	0.76	1.52		3958	0.04
	38.1	38.1 x 38.1	<0.25	<0.25	<0.25	0.25	0.25	0.51	0.76	1.52	5535	0.07
	38.1	19.05 x 19.05	<0.25	<0.25	<0.25	0.25	0.25	0.25	0.76	1.52	5535	0.08
	50.8	50.8 x 50.8	<0.25	<0.25	<0.25	<0.25	0.25	0.25	0.51	1.27	6369	0.09
0.46	25.4	50.8 x 50.8	0.76	1.52	2.29	2.79	3.56				784	0.02
	25.4	38.1 x 38.1	0.51	1.02	1.52	2.03	2.29				1131	0.03
	25.4	25.4 x 101.6	0.51	0.76	1.02	1.52	1.78	3.56			1413	0.04
	25.4	101.6 x 19.05	0.51	0.76	1.02	1.52	1.78	3.56	7.11		1587	0.04
	38.1	38.1 x 38.1	0.25	0.25	0.51	0.51	0.76	1.52	2.79		2827	0.09
	38.1	19.05 x 19.05	0.25	0.25	0.51	0.51	0.76	1.27	2.54		2827	0.10
	50.8	50.8 x 50.8	<0.25	0.25	0.25	0.51	0.51	1.02	2.03	4.06	3571	0.13
0.61	25.4	50.8 x 50.8	2.79	4.57	6.86	9.14	11.43				394	0.02
	25.4	38.1 x 38.1	1.78	3.05	4.57	6.10	7.62				610	0.03
	25.4	25.4 x 101.6	1.27	2.29	3.56	4.57	5.84				795	0.04
	25.4	101.6 x 19.05	1.02	1.78	2.79	3.56	4.57	9.14			893	0.05
	38.1	38.1 x 38.1	0.51	0.76	1.27	1.78	2.03	4.06			1771	0.10
	38.1	19.05 x 19.05	0.51	0.76	1.27	1.52	2.03	3.81			1771	0.11
	50.8	50.8 x 50.8	0.25	0.51	0.76	1.27	1.52	2.79	5.84		2158	0.15
0.76	25.4	50.8 x 50.8	6.60	11.18							238	0.02
	25.4	38.1 x 38.1	4.57	7.37							381	0.03
	25.4	25.4 x 101.6	3.30	5.59							500	0.04
	25.4	101.6 x 19.05	2.79	4.57	6.60	8.89	11.18				577	0.05
	38.1	38.1 x 38.1	1.27	2.03	3.05	4.06	5.08				1131	0.10
	38.1	19.05 x 19.05	1.02	1.78	2.79	3.81	4.57				1131	0.11
	50.8	50.8 x 50.8	0.76	1.27	2.03	2.54	3.30	6.60			1345	0.16

Note: 25.4mm thick by 25.4mm x 101.6mm rectangular mesh grating panels are only available with a grit surface.

Note: 38.1mm thick by 25.4mm x 50.8mm rectangular mesh deflection data is not included here, contact Strongwell for more information.

DURAGRATE® UNIFORM LOAD / DEFLECTION


SPAN (m)	LOAD in KG / SQUARE METER (KG/M ²)								MAXIMUM RECOMMENDED LOAD (KG/M)	APPARENT EI (10 ⁹ N-CM ²) / METER of WIDTH	
	DEPTH	MESH	293	488	732	976	1221	2442	4882	9764	
0.91	25.4	50.8 x 50.8	13.97	23.11						139	0.02
	25.4	38.1 x 38.1	9.14	15.49						268	0.03
	25.4	25.4 x 101.6	6.86	11.68						353	0.04
	25.4	101.6 x 19.05	5.59	9.14	13.97					367	0.05
	38.1	38.1 x 38.1	2.29	3.81	5.84					734	0.11
	38.1	19.05 x 19.05	2.03	3.56	5.33					734	0.12
	50.8	50.8 x 50.8	1.52	2.54	3.56	4.83				903	0.18
1.07	38.1	38.1 x 38.1	4.57	7.87						502	0.10
	38.1	19.05 x 19.05	4.32	7.11						502	0.11
	50.8	50.8 x 50.8	2.54	4.32	6.35	8.64				663	0.19
1.22	38.1	38.1 x 38.1	8.89							327	0.09
	38.1	19.05 x 19.05	7.37							327	0.11
	50.8	50.8 x 50.8	4.32	7.37	10.92					506	0.19
1.37	38.1	38.1 x 38.1	13.97							234	0.09
	38.1	19.05 x 19.05	11.68							234	0.11
	50.8	50.8 x 50.8	7.11	11.68						397	0.19
1.52	50.8	50.8 x 50.8	10.67							315	2.0

Note: 25.4mm thick by 25.4mm x 101.6mm rectangular mesh grating panels are only available with a grit surface.

Note: 38.1mm thick by 25.4mm x 50.8mm rectangular mesh deflection data is not included here, contact Strongwell for more information.

DURAGRATE® CONCENTRATED LINE LOAD / DEFLECTION

LOAD TABLES FOR STANDARD RESIN SYSTEMS

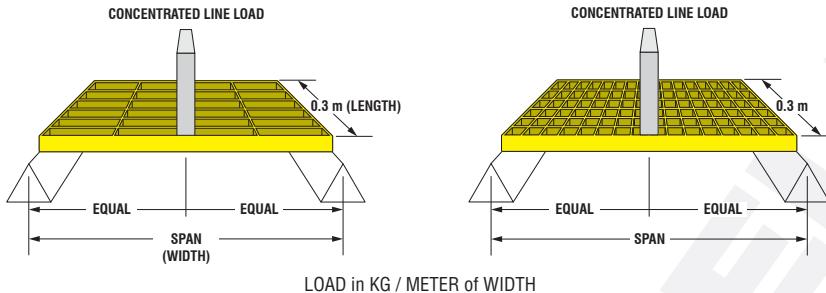

SPAN (m)	STYLE (mm)		LOAD in KG / METER of WIDTH								MAXIMUM RECOMMENDED LOAD (KG/M)	APPARENT EI (10 ⁶ N-CM ²) / METER of WIDTH
	DEPTH	MESH	74	149	223	298	372	744	1488	2976		
0.30	25.4	50.8 x 50.8	0.51	0.76	1.27	1.52	1.78	3.05			923	0.02
	25.4	38.1 x 38.1	0.25	0.25	0.51	0.76	1.02	1.78			1339	0.03
	25.4	25.4 x 101.6	<0.25	0.25	0.51	0.51	0.76	1.52	3.05		1458	0.03
	25.4	101.6 x 19.05	0.25	0.51	0.76	1.02	1.02	1.78	2.79		1979	0.04
	38.1	38.1 x 38.1	<0.25	<0.25	<0.25	0.25	0.25	0.51	1.27	2.54	2768	0.07
	38.1	19.05 x 19.05	<0.25	<0.25	<0.25	0.25	0.25	0.51	1.27	2.29	2768	0.08
	50.8	50.8 x 50.8	<0.25	<0.25	<0.25	0.25	0.25	0.51	1.02	1.78	3185	0.09
0.46	25.4	50.8 x 50.8	1.02	1.78	2.54	3.56	4.32				588	0.02
	25.4	38.1 x 38.1	0.51	1.02	1.78	2.29	2.79				848	0.03
	25.4	25.4 x 101.6	0.51	0.76	1.27	1.52	2.03	4.06			1060	0.04
	25.4	101.6 x 19.05	0.51	1.02	1.27	1.78	2.03	3.30	7.11		1191	0.04
	38.1	38.1 x 38.1	<0.25	0.25	0.25	0.51	0.76	1.52	3.05		2121	0.09
	38.1	19.05 x 19.05	<0.25	0.25	0.25	0.51	0.76	1.52	2.79		2121	0.10
	50.8	50.8 x 50.8	<0.25	0.25	0.25	0.51	0.51	1.02	2.29	4.32	2679	0.13
0.61	25.4	50.8 x 50.8	2.29	4.32	6.35	8.38	10.41				394	0.02
	25.4	38.1 x 38.1	1.27	2.54	3.81	5.08	6.10				610	0.03
	25.4	25.4 x 101.6	1.02	1.78	2.79	3.81	4.83				795	0.04
	25.4	101.6 x 19.05	1.02	1.78	2.29	3.05	3.81	7.37			893	0.05
	38.1	38.1 x 38.1	0.25	0.51	1.02	1.27	1.52	3.30			1771	0.10
	38.1	19.05 x 19.05	0.25	0.51	1.02	1.27	1.52	3.05			1771	0.11
	50.8	50.8 x 50.8	<0.25	0.25	0.51	0.76	1.02	2.29	4.57		2158	0.15
0.76	25.4	50.8 x 50.8	3.81	7.62	11.18						298	0.02
	25.4	38.1 x 38.1	2.29	4.83	7.11						476	0.03
	25.4	25.4 x 101.6	1.78	3.56	5.33	7.11					625	0.04
	25.4	101.6 x 19.05	1.52	2.79	4.32	5.84	7.11	14.22			722	0.05
	38.1	38.1 x 38.1	0.51	1.27	1.78	2.54	3.05	6.35			1414	0.10
	38.1	19.05 x 19.05	0.51	1.27	1.78	2.29	3.05	5.84			1414	0.11
	50.8	50.8 x 50.8	0.25	0.76	1.27	1.52	2.03	4.06			1682	0.16

Note: 25.4mm thick by 25.4mm x 101.6mm rectangular mesh grating panels are only available with a grit surface.

Note: 38.1mm thick by 25.4mm x 50.8mm rectangular mesh deflection data is not included here, contact Strongwell for more information.

DURAGRATE® CONCENTRATED LINE LOAD / DEFLECTION

LOAD in KG / METER of WIDTH

SPAN (m)	STYLE (mm)		LOAD in KG / METER of WIDTH							MAXIMUM RECOMMENDED LOAD (KG/M)	APPARENT EI (10 ⁹ N-CM ²) / METER of WIDTH	
	DEPTH	MESH	74	149	223	298	372	744	1488	2976		
0.91	25.4	50.8 x 50.8	6.10	12.19							208	0.02
	25.4	38.1 x 38.1	3.81	7.62							402	0.03
	25.4	25.4 x 101.6	3.05	6.10							530	0.04
	25.4	101.6 x 19.05	2.54	4.83	7.11	9.40	11.68				551	0.05
	38.1	38.1 x 38.1	1.02	2.03	3.05	4.06	5.08				1101	0.11
	38.1	19.05 x 19.05	1.02	1.78	2.79	3.81	4.83				1101	0.12
	50.8	50.8 x 50.8	0.51	1.27	1.78	2.54	3.05	6.35			1354	0.18
1.07	25.4	38.1 x 38.1	6.10								327	0.03
	25.4	25.4 x 101.6	4.83	9.91							452	0.04
	25.4	101.6 x 19.05	3.81	7.87	11.68						469	0.05
	38.1	38.1 x 38.1	1.78	3.56	5.33	7.11	8.89				878	0.10
	38.1	19.05 x 19.05	1.52	3.30	4.83	6.60	8.13				878	0.11
	50.8	50.8 x 50.8	0.76	1.78	2.79	3.81	4.83				1161	0.19
1.22	38.1	38.1 x 38.1	2.79	5.84	8.64	11.68					655	0.09
	38.1	19.05 x 19.05	2.54	4.83	7.37	9.65					655	0.11
	50.8	50.8 x 50.8	1.27	2.79	4.32	5.84	7.11				1012	0.19
1.37	38.1	38.1 x 38.1	4.06	8.38							527	0.09
	38.1	19.05 x 19.05	3.56	6.86							527	0.11
	50.8	50.8 x 50.8	2.03	4.06	6.10	8.13	10.41				893	0.19
1.52	50.8	50.8 x 50.8	2.79	5.59	8.38	11.43					789	0.19


Note: 25.4mm thick by 25.4mm x 101.6mm rectangular mesh grating panels are only available with a grit surface.

Note: 38.1mm thick by 25.4mm x 50.8mm rectangular mesh deflection data is not included here, contact Strongwell for more information.

DURAGRATE® CONCENTRATED POINT LOAD / DEFLECTION

Note: This loading criteria is not recognized by Fiberglass Composites Grating Manual

LOAD TABLES FOR STANDARD RESIN SYSTEMS

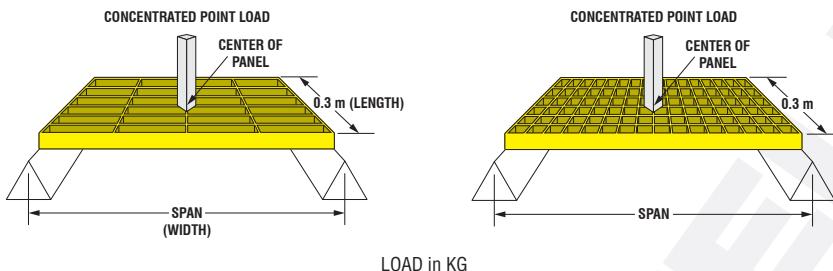

LOAD in KG

SPAN (m)	STYLE (mm)		74	149	223	298	372	744	1488	2976	APPARENT EI (10 ⁹ N·CM ²) / METER of WIDTH
	DEPTH	MESH									
0.30	25.4	50.8 x 50.8	<0.25	<0.25	<0.25	<0.25	0.25	0.51	1.27	2.29	0.02
	25.4	38.1 x 38.1	<0.25	<0.25	<0.25	<0.25	<0.25	0.51	0.76	1.52	0.03
	25.4	25.4 x 101.6	<0.25	<0.25	<0.25	<0.25	<0.25	0.51	0.76	1.52	0.03
	25.4	101.6 x 19.05	<0.25	<0.25	<0.25	<0.25	<0.25	0.25	0.51	1.27	0.04
	38.1	38.1 x 38.1	<0.25	<0.25	<0.25	<0.25	<0.25	<0.25	0.25	0.76	0.07
	38.1	19.05 x 19.05	<0.25	<0.25	<0.25	<0.25	<0.25	<0.25	0.25	0.51	0.08
	50.8	50.8 x 50.8	<0.25	<0.25	<0.25	<0.25	<0.25	<0.25	<0.25	0.51	0.09
0.46	25.4	50.8 x 50.8	<0.25	0.51	0.51	0.76	1.02	2.03	3.81	7.62	0.02
	25.4	38.1 x 38.1	<0.25	0.25	0.51	0.51	0.76	1.27	2.54	5.08	0.03
	25.4	25.4 x 101.6	<0.25	<0.25	0.25	0.51	0.51	1.02	2.03	3.81	0.04
	25.4	101.6 x 19.05	<0.25	<0.25	0.25	0.51	0.51	1.02	2.03	3.81	0.04
	38.1	38.1 x 38.1	<0.25	<0.25	<0.25	<0.25	<0.25	0.51	0.76	1.52	0.09
	38.1	19.05 x 19.05	<0.25	<0.25	<0.25	<0.25	<0.25	0.25	0.76	1.52	0.10
	50.8	50.8 x 50.8	<0.25	<0.25	<0.25	<0.25	<0.25	0.25	0.51	1.02	0.13
0.61	25.4	50.8 x 50.8	0.51	1.02	1.27	1.78	2.29	4.57	9.14		0.02
	25.4	38.1 x 38.1	0.25	0.51	1.02	1.27	1.52	3.05	6.10		0.03
	25.4	25.4 x 101.6	<0.25	0.51	0.76	1.02	1.27	2.29	4.57	9.14	0.04
	25.4	101.6 x 19.05	<0.25	0.25	0.51	0.76	1.02	1.78	3.56	7.37	0.05
	38.1	38.1 x 38.1	<0.25	<0.25	<0.25	0.25	0.51	0.76	1.78	3.30	0.10
	38.1	19.05 x 19.05	<0.25	<0.25	<0.25	0.25	0.51	0.76	1.52	3.05	0.11
	50.8	50.8 x 50.8	<0.25	<0.25	<0.25	<0.25	0.25	0.51	1.27	2.29	0.15
0.76	25.4	50.8 x 50.8	1.02	1.78	2.79	3.56	4.57	8.89			0.02
	25.4	38.1 x 38.1	0.51	1.27	1.78	2.29	3.05	5.84			0.03
	25.4	25.4 x 101.6	0.51	1.02	1.27	1.78	2.29	4.57	8.89		0.04
	25.4	101.6 x 19.05	0.25	0.76	1.02	1.52	1.78	3.56	7.11		0.05
	38.1	38.1 x 38.1	<0.25	0.25	0.51	0.76	0.76	1.52	3.30		0.10
	38.1	19.05 x 19.05	<0.25	0.25	0.51	0.51	0.76	1.52	3.05		0.11
	50.8	50.8 x 50.8	<0.25	<0.25	0.25	0.51	0.51	1.02	2.03	4.32	0.16

Note: 25.4mm thick by 25.4mm x 101.6mm rectangular mesh grating panels are only available with a grit surface.

Note: 38.1mm thick by 25.4mm x 50.8mm rectangular mesh deflection data is not included here, contact Strongwell for more information.

DURAGRATE® CONCENTRATED POINT LOAD / DEFLECTION

Note: This loading criteria is not recognized by Fiberglass Composites Grating Manual

LOAD in KG

SPAN (m)	STYLE (mm)		LOAD in KG							APPARENT EI (10 ⁹ N-CM ²) / METER of WIDTH	
	DEPTH	MESH	74	149	223	298	372	744	1488	2976	
0.91	25.4	50.8 x 50.8	1.52	3.05	4.57	6.10	7.62				0.02
	25.4	38.1 x 38.1	1.02	2.03	3.05	4.06	5.08				0.03
	25.4	25.4 x 101.6	0.76	1.52	2.29	3.05	3.81	7.62			0.04
	25.4	101.6 x 19.05	0.51	1.27	1.78	2.54	3.05	6.10			0.05
	38.1	38.1 x 38.1	0.25	0.51	0.76	1.02	1.27	2.54	5.08		0.11
	38.1	19.05 x 19.05	<0.25	0.51	0.76	1.02	1.27	2.29	4.83		0.12
	50.8	50.8 x 50.8	<0.25	0.25	0.51	0.76	0.76	1.52	3.30	6.60	0.18
1.07	25.4	38.1 x 38.1	1.52	3.30	4.83	6.60					0.03
	25.4	25.4 x 101.6	1.27	2.54	3.56	4.83	6.10				0.04
	25.4	101.6 x 19.05	1.02	2.03	3.05	3.81	4.83				0.05
	38.1	38.1 x 38.1	0.51	1.02	1.27	1.78	2.29	4.57	8.89		0.10
	38.1	19.05 x 19.05	0.51	0.76	1.27	1.52	2.03	4.06	8.13		0.11
	50.8	50.8 x 50.8	<0.25	0.51	0.76	1.02	1.27	2.54	4.83		0.19
1.22	38.1	38.1 x 38.1	0.76	1.52	2.29	3.05	3.56	7.37			0.09
	38.1	19.05 x 19.05	0.51	1.27	1.78	2.54	3.05	6.10			0.11
	50.8	50.8 x 50.8	0.25	0.76	1.02	1.52	1.78	3.56	7.37		0.19
1.37	38.1	38.1 x 38.1	1.02	2.03	3.05	4.06	5.33				0.09
	38.1	19.05 x 19.05	0.76	1.78	2.54	3.56	4.32				0.11
	50.8	50.8 x 50.8	0.51	1.02	1.52	2.03	2.54	5.33			0.19
1.52	50.8	50.8 x 50.8	0.76	1.52	2.03	2.79	3.56	7.11			0.19

Note: 25.4mm thick by 25.4mm x 101.6mm rectangular mesh grating panels are only available with a grit surface.

Note: 38.1mm thick by 25.4mm x 50.8mm rectangular mesh deflection data is not included here, contact Strongwell for more information.

DURADEK® FIBERGLASS GRATING

INTRODUCTION TO DURADEK®

DURADEK® fiberglass grating is a pultruded bar type grating manufactured by Strongwell-Chatfield Location. This grating can be designed and used like traditional metal grates. The individual bearing bars are either "I" bar or "T" bar shapes chosen for their economy and efficiency of design.

The available colors are light gray and yellow.

DURADEK® fiberglass grating is produced in fire retardant polyester resin. This resin is a premium grade fire retardant polyester with antimony trioxide added. This system exceeds the requirements for Class 1 flame rating of 25 or less per ASTM E-84 and meets the self-extinguishing requirements of ASTM D-635. The bars with this resin have a surfacing veil and a UV inhibitor for UV protection. This resin is available with bearing bars in either yellow or light gray and identified as YFRPE or GFRPE.

Also available as an option is a premium grade vinyl ester resin for severe corrosion applications. Vinyl ester has better resistance to caustic and certain acid environments than polyester resin. This resin also meets the ASTM E-84 Class 1 flame rating. The bars made with this resin have a surfacing veil and a UV inhibitor for UV protection. This resin is available with bearing bars in either yellow or light gray and identified as YFRVE or GFRVE.

Corrosion information for these resins is listed in Section 22 — **CORROSION RESISTANCE GUIDE**. Other special resin systems and colors are available in the line specified as DURAGRID®.

Each bearing bar is reinforced by a core of densely packed continuous glass fibers wrapped by a continuous glass mat plus a synthetic surfacing veil which provides a 100% pure resin surface for added corrosion resistance. The densely packed core makes the bars very rigid and strong in the longitudinal direction. The continuous glass mat gives the bar strength in the transverse direction to protect them from chipping, cracking and lineal fracturing along with giving each bar a resin-rich surface.

The bearing bars are assembled into panels of grating by a unique patented* cross-rod system. The cross-rod system consists of two continuous pultruded spacer bars and a center core wedge. The spacers are notched at each bearing bar so the bars are both mechanically locked and chemically bonded to the web of each bearing bar. The wedge is, in turn, bonded to the spacers to form a strong and rigid cross-rod support system that resists twist, prevents lateral movement of the bearing bars, and transfers load from one bar to the next.

The cross-rod support system allows **DURADEK®** grating to be cut and fabricated like a solid sheet. Just coat the cut end with a resin sealer and install. If more installation information is needed, ask for Strongwell's *Grating Field Fabrication Guide*.

The top of the **DURADEK®** grating is covered with a permanently bonded, grit-baked epoxy, anti-skid surface. This surface assures a safe, anti-skid walkway.

* U.S. Patent No. 4,522,009
Canadian Patent No. 1,211,270

DURAGRID® & DURAGRID® PHENOLIC FIBERGLASS GRATING

INTRODUCTION TO DURAGRID® AND DURAGRID® PHENOLIC

DURAGRID® Custom Fiberglass Grids and Grating

DURAGRID® is the registered product trademark for the non-standard, non-stocked pultruded grating manufactured by Strongwell. Strongwell can custom manufacture grid or grating systems to accommodate specific plant applications that cannot effectively be met by a standard line of fiberglass grating. **DURAGRID®** offers such options as selection of open space, bar shape, cross rod placement, custom fabrication, custom resin or color. Often a grid or grating system tailored to the demands of a specific application will not only do the job better, but also be more cost effective than trying to adapt standard grating to a specific situation.

Data on some of the more common custom gratings are included herein. Refer to the load/deflection tables for selection.

DURAGRID® Phenolic

DURAGRID® Phenolic is a fire resistant pultruded grating manufactured by Strongwell-Chatfield using phenolic resin and continuous glass fibers wrapped by a continuous strand glass mat. **DURAGRID® Phenolic** grating generates much less smoke and toxic fumes when exposed to fire than traditional FRP products. **DURAGRID® Phenolic** grating meets or exceeds USA Fire Safety Standards. It is accepted for use in locations and applications as allowed in the ASTM F3059 Matrix guide for fiberglass grating meeting Structural Fire Integrity Level 2 (L2). It also complies with Annex 1 (Resolution MSC.307(88) , Part 2, 2.41 and 2.4.2 (smoke and toxicity testing) of the FTP Code (International Code for Application of Fire Test Procedures) - (MSC 88/26/ Add.2) issued by the International Maritime Organization (IMO).

If Coast Guard PFM 2-98 approval is required, contact Strongwell for appropriate load/deflection tables.

DURAGRID® Phenolic Technical Data

ASTM D635-77

Flammability Rate cm/min. <1

ASTM E84

Flame Spread Index	10
Smoke Index	10

UL-94

V0

EVOLUTION OF PULTRUDED GRATING

THE FRP GRATING MARKET

The pultrusion process has been responsible for the advancement and expansion of the Fiberglass Reinforced Plastic (FRP) grating market. This was not possible with other manufacturing processes. The basic needs of floor grating established the need for FRP grating. The evolution of the FRP grating market created a demand for pultruded grating. Grating made from pultruded components is able to provide the many options that the market demands.

THE FIRST GENERATION OF FRP GRATING

The first generation of FRP grating was by the hand lay-up method. It was composed of resin saturated rovings laid up in a criss-cross pattern to form a grating without the use of a mold. The advantages of this grating were that it was nonmetallic, corrosion-resistant and had a resin-rich surface. The lay-up method allowed versatility in size and strength. The disadvantages were that it was very labor intensive, it had rectangular bearing bars and low glass content which lead to high deflections and quality was poor with many voids and a rough appearance. The resin-rich surface at the corners, allowed fast surface wear and chipping. Ultraviolet deterioration was also a problem.

THE SECOND GENERATION OF FRP GRATING

The second generation of fiberglass grating is by the open mold method. The composite is composed of unidirectional glass fiber rovings and resin. This method is similar to the hand lay-up method but now a mold is used. It has the advantages of having a resin-rich surface, a better appearance and lower labor cost. The disadvantage is that a mold limits the versatility in size and strength. It has rectangular bearing bars and a low glass content which leads to high deflections and voids are a problem. It still has resin-rich surfaces at the corners which allow fast surface wear and chipping. A grit surface can be molded into the product for skid resistance but it can chip off easily. Ultraviolet deterioration can be improved only with a UV inhibitor.

THE THIRD GENERATION OF FRP GRATING

The third generation of FRP grating is by the compression molded method. This method is an improvement over the open mold method and gives a resin-rich surface. Because it is compression molded, it has a higher glass content which leads to less deflection than open molded grating. It has fewer and smaller voids and a better wearing surface. The top corners are molded and less susceptible to chipping. The disadvantage is that it is made in a mold and therefore does not offer the versatility in size and bar shape. Fiber content is not ideal and results in the need to use excessive amounts of material to achieve the desired strength and stiffness values. A skid-resistant surface must be applied as a secondary operation. Ultraviolet deterioration can be improved only with a UV inhibitor.

THE FOURTH GENERATION OF FRP GRATING

The fourth generation of FRP grating is made using pultruded components. The first pultruded FRP grating was made from an all unidirectional roving and resin composite. It had the advantages of using an engineered shape "I bar" for material savings. It had a much higher glass content (up to 70% glass) which made a much stronger part with less deflection. The pultrusion process eliminates the voids and improves quality. Because the bars can be cut to any length and located at any spacing, versatility in size and length is unlimited. The high strength of pultruded grating allows the use of the same depth as would be used with metal grating, and in most cases, without adding additional supports. The disadvantage of the first pultruded grating is that it had a less resin-rich surface and, therefore, lower corrosion resistance. Because it was made from all unidirectional rovings, it could split along the fibers. The method of assembling the bars did not provide good structural integrity, as the bars would loosen up and shift on the cross rods. The high glass content at the surface made ultraviolet deterioration a problem.

EVOLUTION OF PULTRUDED GRATING

THE FIFTH GENERATION OF FRP GRATING


Up to this point, some people believed that if you wanted a grating that had good corrosion resistance and was easy to fabricate, use molded grating. If you wanted a grating that required high strength, but lower corrosion resistance, use a pultruded grating. This line of reasoning is no longer true. Strongwell has evolved the pultruded grating design and assembling process to the point that you can now have the best of both in a variety of pultruded grating.

Each bearing bar that Strongwell manufactures is reinforced by a core of densely packed, continuous glass fibers wrapped by a continuous glass mat, plus a synthetic surfacing veil. The core of continuous glass fibers gives the longitudinal strength and stiffness. The continuous glass mat gives the bars strength in the transverse direction to protect them from chipping, cracking and lineal fracturing. This mat allows you to optimize the cross-sectional design to achieve the best stiffness and strength from the least amount of material. The synthetic surfacing veil encapsulates the bar in a 100% resin surface, which provides excellent corrosion resistance and protection from UV exposure. The average resin to glass ratio of the composite is no longer a gauge of corrosion resistance. Location and placement of the glass and resin is the real gauge of corrosion resistance.

The bearing bars are assembled into panels of grating by a unique cross-rod system. The cross-rod support system consists of two continuous, pultruded spacer bars and a center core wedge. The spacers are notched at each bearing bar so the bars are both mechanically locked and chemically bonded to the web of each bearing bar. The wedge is, in turn, bonded to the spacers to form a strong and rigid cross-rod support system that resists twist, prevents lateral movement of the bearing bars, and transfers load from one bar to the next. The cross-rod system allows the grating panels to be cut and fabricated like a solid sheet. This cross-rod system also allows unlimited selection in spacing of bearing bars.

The variety of bearing bars, along with the engineered location and placement of the reinforcements, surfacing veil and resin, gives the end user the widest product choice available. No other manufacturing process can offer the corrosion resistance or product options as economically.

PULTRUDED GRATING PANEL SIZES

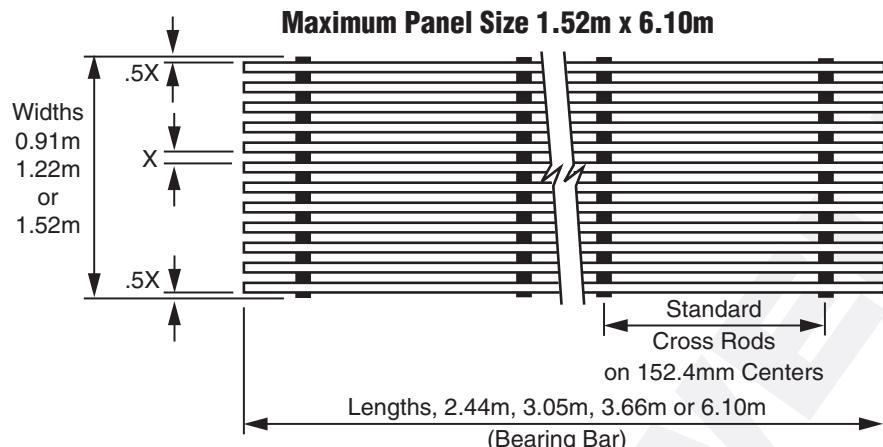

PANEL SIZE AVAILABILITY	
DURADEK®	(203mm cross rod spacing)
I-6500 25mm & I-6500 38mm	0.91m x 3.05m, 0.91m x 6.10m, 1.22m x 2.44m, 1.22m x 3.66m, 1.22m x 6.10m, 1.52m x 3.05m, 1.52m x 6.10m
T-5800 51mm	0.91m x 6.10m, 1.22m x 3.66m, 1.22m x 6.10m, 1.52m x 3.05m, 1.52m x 6.10m
DURAGRID®	
All series available in any size and cross rod spacing (50.8mm increments) with a maximum panel size of 1.52m x 6.10m.	
DURAGRID® Phenolic	
Standard panel sizes include 0.91m x 6.10m, 1.22m x 6.10m Fabricated and custom size panels are also available	


DURADEK® grating panels are built with bearing bars up to 6.10m in length and widths up to 1.52m. Standard panel sizes are listed above. Custom grating sizes and series, other special bearing bar spacing, cross-rod spacings, oversized panels, other colors and resins are available in the line specified as **DURAGRID®**. UV coating is available on all grating series.

DURAGRID® STAIR TREADS AND LANDINGS


Stair treads and landings are produced by attaching a 51mm rectangular or "box" shaped nosing to the leading edge of treads or landings. This gives added strength and rigidity to the area that takes impact and abuse. In addition, the nosing provides more surface area for skid-resistance, wear and better visibility. Exceeds O.S.H.A. Standard 1910-24.

TREAD WIDTH	COLOR	STAIR TREAD SERIES	MAXIMUM SPAN FOR 136 kg AT MIDSPAN	
			3mm OR LESS DEFLECTION	6mm OR LESS DEFLECTION
280mm	Light Gray, Yellow or Earthenware (Phenolic)*	I-6000 25mm	736mm	940mm
280mm	Light Gray, Yellow or Earthenware (Phenolic)*	I-6000 38mm	1016mm	1320mm
305mm	Light Gray, Yellow or Earthenware (Phenolic)*	T-5000 51mm	1194mm	1499mm


*Optional yellow closed nosing on light gray or phenolic panels is also available

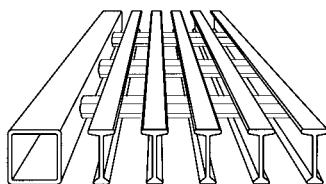


"Box" shaped nosing is used for grating with 51mm depth.

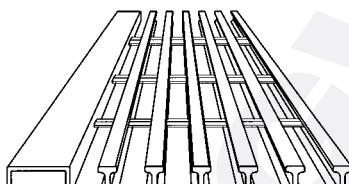

51mm deep rectangular shaped nosing is used for all grating with depths of 25mm and 38mm.

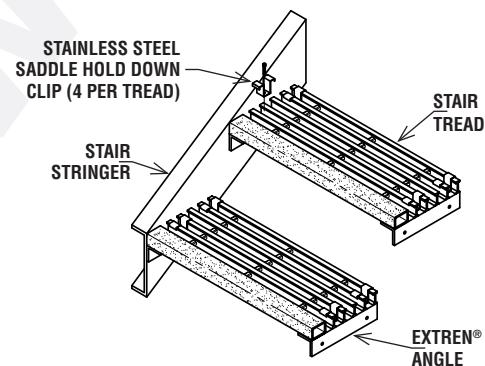


PANEL HOLD DOWNS

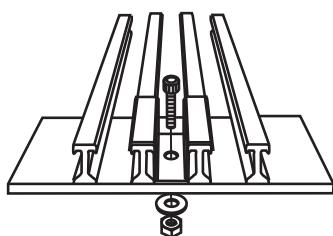


The weldable 316L stainless steel saddle clips above are available for some grating series.

*Bolts are priced separately from the saddle clips.

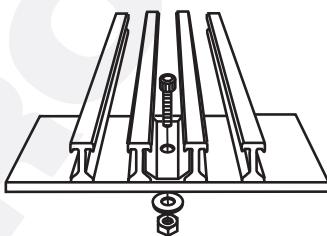

The weldable 316L stainless steel insert clips above are available for some grating series.

*Bolts are priced separately from the hold-down.

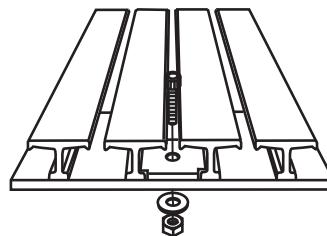


The weldable 316L stainless steel insert clips above are available for DURAGRID® T-1800 and T-3500 only.

*Bolts are priced separately from the hold-down.


(All bolts are 6.35mm-20 x 31.75mm, cap head, 316L stainless steel.)

PANEL CONNECTORS


Panel Connectors are generally only used at midspan to assist in transferring load from section to section.

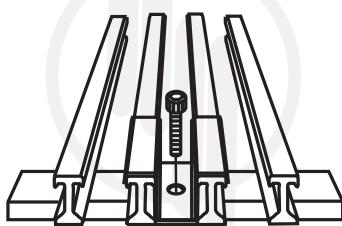

The 316L stainless steel saddle clips above are available as panel connectors for some grating series.

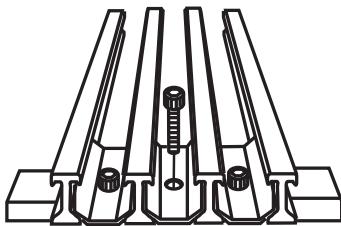

The 316L stainless steel insert clips above are available for some grating series.

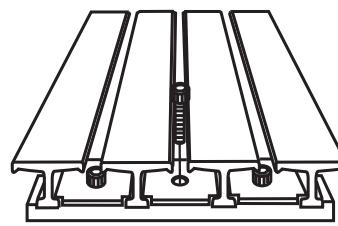

The 316L stainless steel insert clips above are available for DURAGRID® T-1800 and T-3500 only.

(All bolts are 6.35mm-20 x 31.75mm, cap head, 316L stainless steel.)

HOW TO SPECIFY DURADEK® GRATING

Fiberglass grating shall be DURADEK® Series (I-6500 25mm) (I-6500 38mm) (T-5800 51mm) as manufactured by Strongwell. Grating shall be pultruded and assembled in the U.S.A. Resin shall be fire retardant (polyester) (vinyl ester) meeting the requirements of a Class 1 rating of 25 or less per ASTM E-84 and the self-extinguishing requirements of ASTM D-635. Bearing bar color shall be (light gray) (yellow). Resin shall be UV inhibited and the composite shall include a veil on all exposed surfaces. Panels shall be assembled into the sizes ordered using a 3-piece pultruded cross-rod system with color correlating with chosen resin system: polyester = light gray, vinyl ester = black.

The cross-rods shall consist of a center core wedge and two spacer bars that are notched at each bearing bar so that each bearing bar is both mechanically locked and chemically bonded to the web of each bearing bar. The spacer bars shall be continually bonded to the center core wedge. The cross-rods shall be spaced a maximum of 203mm in the panel. The top of the panels shall be covered with a bonded epoxy medium grit anti-skid surface.
NOTE: If special options are required that are not stated in the above specification, fill in your special requirement in the appropriate section.


NOTE: See Section 20 — **STRONGWELL SPECIFICATIONS FOR FIBERGLASS REINFORCED POLYMER PRODUCTS AND FABRICATIONS.**

HOW TO ORDER DURADEK® GRATING

When ordering DURADEK®, ensure the bearing bars for installation will be oriented in the correct direction for the application. Bearing bars shall traverse from support to support. Cross-rods are not intended to be applied in the span direction. The adjacent drawing will help specify the width and length of panels. NOTE: Width is the measurement from end to end of the cross-rods. Length is always the bearing bar length.

Panel Sizes Are Specified: Width x Length

NOTE: DURAGRID®, Strongwell's line of custom pultruded grating, is available with a wide array of options, including: colors, resin systems, panel sizes, cross rod spacings and more.



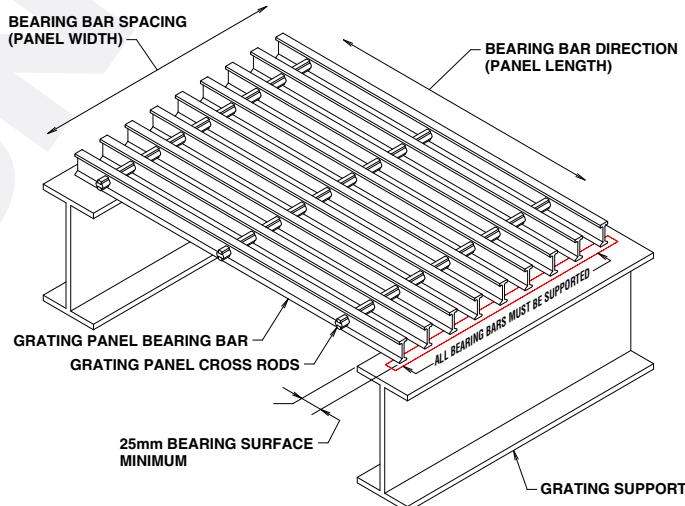


DURADEK® GRATING SERIES

SERIES	BEARING BAR THICKNESS	NO. BARS PER m WIDTH	BEARING BAR CENTER	OPEN SPACE	OPEN AREA	APPROX. WEIGHT PER m ²	SPAN*	CROSS-SEC-TIONAL AREA (PER m OF WIDTH)	MOMENT OF INERTIA (PER m OF WIDTH)	SECTION MODULUS (PER m OF WIDTH)
I-6500	25.4mm	23	43.43mm	28.19mm	65%	10.74 kg	1076mm	4.63 x 10 ³ mm ²	3.93 x 10 ⁶ mm ⁴	3.09 x 10 ⁴ mm ³
I-6500	38.1mm	23	43.43mm	28.19mm	65%	13.18 kg	1385mm	5.82 x 10 ³ mm ²	1.11 x 10 ⁶ mm ⁴	5.85 x 10 ⁴ mm ³
T-5800	50.8mm	16	61.00mm	35.60mm	58%	12.70 kg	1578mm	5.74 x 10 ³ mm ²	1.91 x 10 ⁶ mm ⁴	top: 8.53 x 10 ⁴ mm ³ bottom: 6.07 x 10 ⁴ mm ³

*NOTE: When a 4.78 kN/m² uniform load is placed upon a simple span of this dimension, it will produce a deflection of 6.35mm at midspan.


DURADEK® GRATING UNIFORM LOAD / DEFLECTION

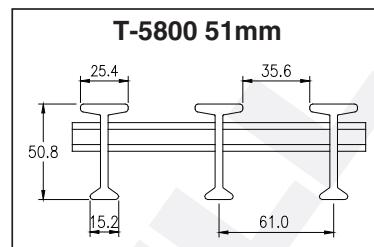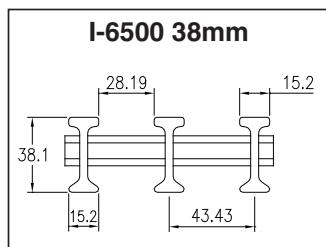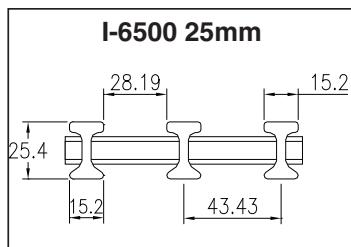




LOAD in KN / SQUARE METER (KN/SQm)

SPAN METERS	STYLE												MAXIMUM RECOMMENDED LOAD (KN/SQm)	DEFLECTION	E X 10 ¹⁰ N/SQM	
	SERIES	DEPTH	3	3.5	4	4.5	5	6	8	10	12	15	20			
0.4	I-6500	25mm	0.09	0.11	0.12	0.14	0.15	0.19	0.25	0.31	0.37	0.46	0.62	253.2	7.82	2.75
	I-6500	38mm	0.03	0.04	0.04	0.05	0.06	0.07	0.09	0.11	0.13	0.17	0.22	429.6	4.74	2.72
0.6	I-6500	25mm	0.42	0.49	0.57	0.64	0.71	0.85	1.13	1.41	1.70	2.12	2.83	121.6	17.19	3.04
	I-6500	38mm	0.16	0.18	0.21	0.23	0.26	0.31	0.42	0.52	0.63	0.78	1.04	185.0	9.65	2.91
	T-5800	51mm	0.10	0.11	0.13	0.15	0.16	0.19	0.26	0.32	0.39	0.49	0.65	226.0	7.32	2.73
0.8	I-6500	25mm	1.26	1.47	1.68	1.89	2.10	2.52	3.36	4.20	5.05	6.31	8.41	70.2	29.51	3.23
	I-6500	38mm	0.47	0.55	0.63	0.71	0.78	0.94	1.26	1.57	1.88	2.35	3.14	105.4	16.53	3.06
	T-5800	51mm	0.29	0.34	0.39	0.44	0.49	0.59	0.79	0.98	1.18	1.47	1.96	131.0	12.84	2.85
1.0	I-6500	25mm	2.98	3.47	3.97	4.47	4.96	5.96	7.94	9.93	11.91	14.89		45.0	44.70	3.34
	I-6500	38mm	1.12	1.31	1.50	1.68	1.87	2.25	3.00	3.74	4.49	5.62	7.49	66.1	24.76	3.13
	T-5800	51mm	0.70	0.82	0.94	1.05	1.17	1.40	1.87	2.34	2.81	3.51	4.68	83.0	19.50	2.92
1.2	I-6500	25mm	6.03	7.04	8.04	9.05	10.05	12.06	16.08					29.8	59.96	3.42
	I-6500	38mm	2.28	2.66	3.04	3.42	3.80	4.56	6.08	7.59	9.11	11.39	15.19	42.7	32.45	3.20
	T-5800	51mm	1.43	1.66	1.90	2.14	2.38	2.85	3.80	4.75	5.70	7.13	9.51	56.0	26.54	2.98
1.4	I-6500	38mm	4.16	4.85	5.54	6.23	6.93	8.31	11.08	13.85	16.62			31.0	42.97	3.25
	T-5800	51mm	2.58	3.01	3.44	3.87	4.30	5.16	6.88	8.60	10.33	12.91		42.0	36.57	3.05
1.6	I-6500	38mm	7.05	8.22	9.40	10.57	11.74	14.09						22.8	53.62	3.27
	T-5800	51mm	4.33	5.05	5.78	6.50	7.22	8.67	11.55	14.44				32.0	46.94	3.10
1.8	I-6500	38mm	11.22	13.09	14.96	16.83								17.6	65.66	3.29
	T-5800	51mm	6.83	7.97	9.11	10.24	11.38	13.66						26.0	58.81	3.15
2.0	T-5800	51mm	10.25	11.96	13.66	15.37								21.0	71.16	3.2

NOTE: The red area (■) indicates where the load produces ≤ 6.35mm deflection.

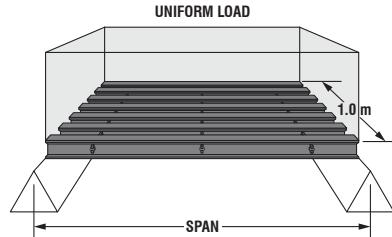


DURADEK® GRATING CONCENTRATED LOAD / DEFLECTION

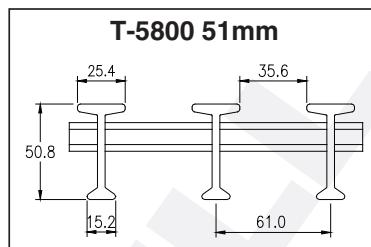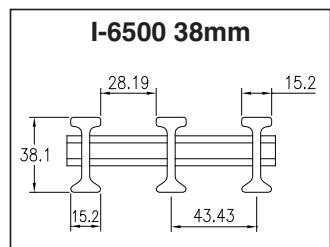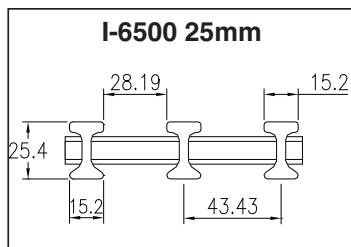

LOAD in KN / METER of WIDTH

SPAN METERS	STYLE		LOAD in KN / METER of WIDTH												MAXIMUM RECOMMENDED LOAD (KN/SQm)	DEFLECTION	E X 10 ¹⁰ N/SQm
	STYLE	DEPTH	3	3.5	4	4.5	5	6	8	10	12	15	20				
0.4	I-6500	25mm	0.37	0.43	0.49	0.56	0.62	0.74	0.99	1.23	1.48	1.85	2.47	50.3	6.21	2.75	
	I-6500	38mm	0.13	0.15	0.18	0.20	0.22	0.26	0.35	0.44	0.53	0.66	0.88	85.5	3.77	2.72	
0.6	I-6500	25mm	1.13	1.32	1.51	1.70	1.88	2.26	3.02	3.77	4.52	5.65	7.54	36.8	13.89	3.04	
	I-6500	38mm	0.42	0.49	0.56	0.63	0.70	0.84	1.11	1.39	1.67	2.09	2.78	56.2	7.82	2.91	
	T-5800	51mm	0.26	0.30	0.35	0.39	0.43	0.52	0.69	0.86	1.04	1.30	1.73	68.0	5.91	2.73	
0.8	I-6500	25mm	2.52	2.94	3.36	3.78	4.20	5.05	6.73	8.41	10.09	12.61	16.82	28.1	23.61	3.23	
	I-6500	38mm	0.94	1.10	1.26	1.41	1.57	1.88	2.51	3.14	3.77	4.71	6.28	42.1	13.22	3.06	
	T-5800	51mm	0.59	0.69	0.79	0.88	0.98	1.18	1.57	1.96	2.36	2.95	3.93	52.0	10.31	2.85	
1.0	I-6500	25mm	4.77	5.56	6.35	7.15	7.94	9.53	12.71	15.88				22.2	35.30	3.34	
	I-6500	38mm	1.80	2.10	2.40	2.70	3.00	3.59	4.79	5.99	7.19	8.99	11.98	32.8	19.64	3.13	
	T-5800	51mm	1.12	1.31	1.50	1.68	1.87	2.25	2.99	3.74	4.49	5.61	7.49	42.0	15.60	2.92	
1.2	I-6500	25mm	8.04	9.38	10.72	12.06	13.40	16.08						18.1	48.59	3.42	
	I-6500	38mm	3.04	3.54	4.05	4.56	5.06	6.08	8.10	10.13	12.15	15.19		25.8	26.08	3.20	
	T-5800	51mm	1.90	2.22	2.54	2.85	3.17	3.80	5.07	6.34	7.61	9.51	12.68	34.0	21.65	2.98	
1.4	I-6500	38mm	4.75	5.54	6.33	7.12	7.92	9.50	12.67	15.83				21.7	34.29	3.25	
	T-5800	51mm	2.95	3.44	3.93	4.43	4.92	5.90	7.87	9.83	11.80	14.75		30.0	29.50	3.05	
1.6	I-6500	38mm	7.05	8.22	9.40	10.57	11.74	14.09						18.1	42.62	3.27	
	T-5800	51mm	4.33	5.05	5.78	6.50	7.22	8.67	11.55	14.44				26.0	37.31	3.10	
1.8	I-6500	38mm	9.97	11.63	13.30	14.96	16.62							15.8	52.53	3.29	
	T-5800	51mm	6.07	7.08	8.09	9.11	10.12	12.14	16.19					22.0	45.53	3.15	
2.0	T-5800	51mm	8.20	9.56	10.93	12.30	13.66	16.40						21	56.93	3.2	

NOTE: The black area () indicates where the load produces ≤ 6.35mm deflection.

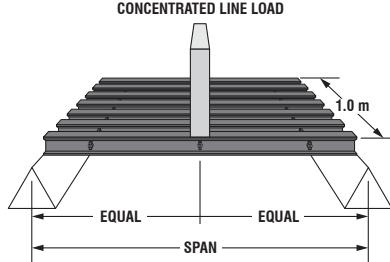

HOW TO SPECIFY DURAGRID® GRATING

Fiberglass grating shall be DURAGRID® Series (_____) as manufactured by Strongwell. Grating shall be pultruded and assembled in the U.S.A. Resin shall be fire retardant (_____) meeting the requirements of a Class 1 rating of 25 or less per ASTM E-84 and the self-extinguishing requirements of ASTM D-635. Bearing bar color shall be (______). Resin shall be UV inhibited and the composite shall include a veil on all exposed surfaces. Panels shall be assembled into the sizes ordered using a 3-piece pultruded cross-rod system with color correlating with chosen resin system: polyester = light gray, vinyl ester = black.

The cross-rods shall consist of a center core wedge and two spacer bars that are notched at each bearing bar so that each bearing bar is both mechanically locked and chemically bonded to the web of each bearing bar. The spacer bars shall be continually bonded to the center core wedge. The cross-rods shall be spaced a maximum of (____)mm in the panel. The top of the panels (shall) (shall not) be covered with a bonded grit anti-skid surface.

NOTE: If special options are required that are not stated in the above specification, fill in your special requirement in the appropriate section.


NOTE: See Section 20 — **STRONGWELL SPECIFICATIONS FOR FIBERGLASS REINFORCED POLYMER PRODUCTS AND FABRICATIONS.**

HOW TO ORDER DURAGRID® GRATING

When ordering DURAGRID®, ensure the bearing bars for installation will be oriented in the correct direction for the application. Bearing bars shall traverse from support to support. Cross-rods are not intended to be applied in the span direction. The adjacent drawing will help specify the width and length of panels.

NOTE: Width is the measurement from end to end of the cross-rods. Length is always the bearing bar length.

Panel Sizes Are Specified: Width x Length

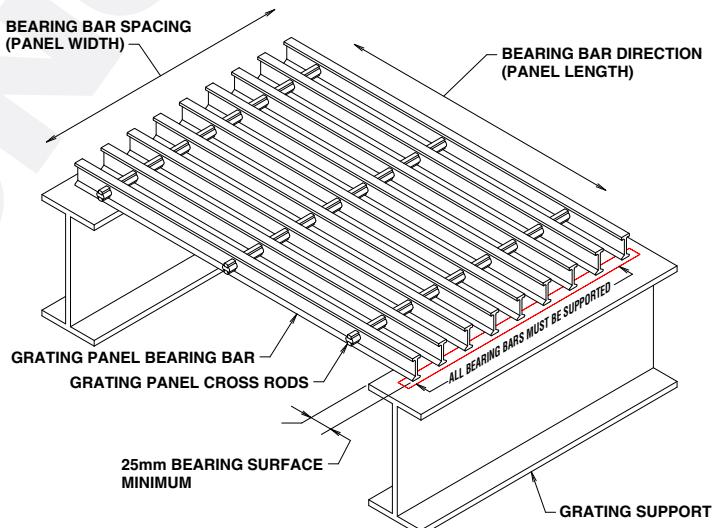















DURAGRID® I-BAR PULTRUDED GRATING

¹ 4.78 kN/m² load, simple span (dimensions shown), 6.35mm deflection.

NOTES:

² Weight per square foot is based upon cross rods 152.4mm on center. Deduct 0.908 kg/m² for 304.8mm on center.

N/A : Not intended for pedestrian applications. For full load tables, visit <http://www.strongwell.com/gratingloadtables-metric>

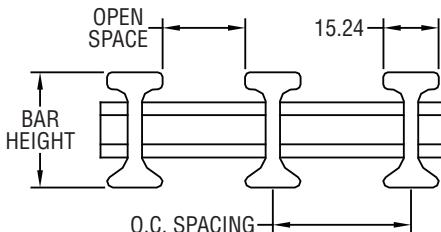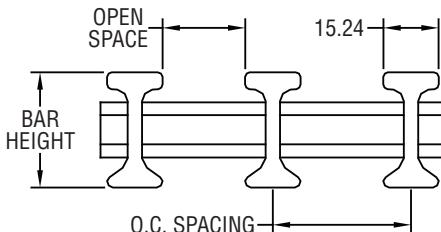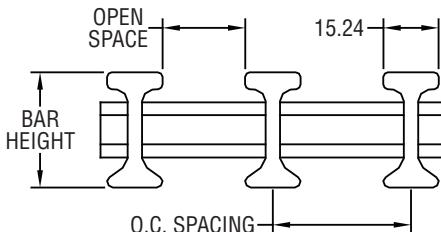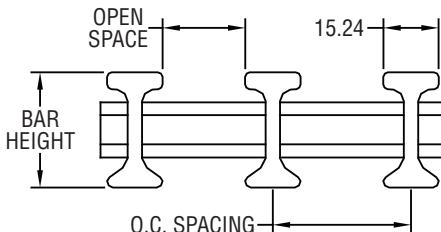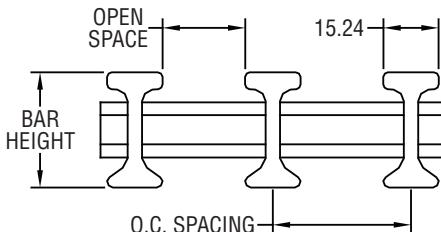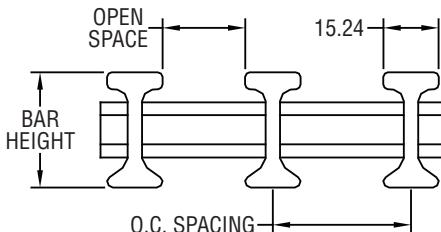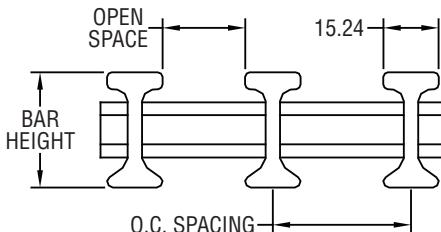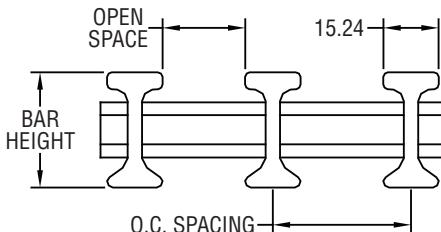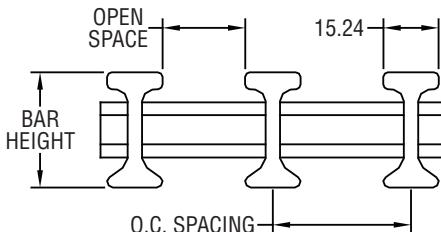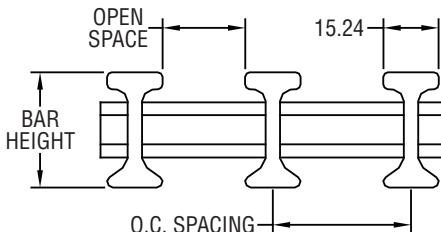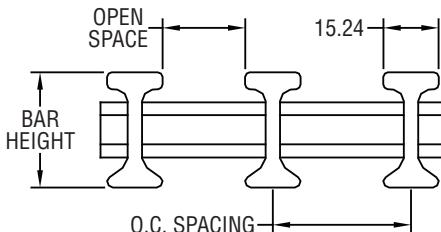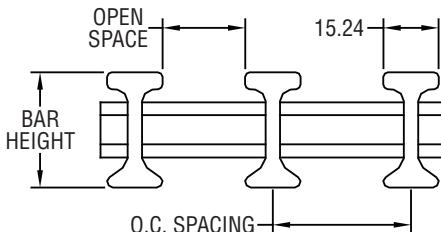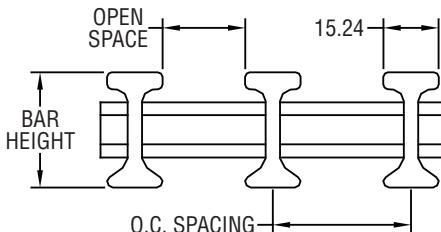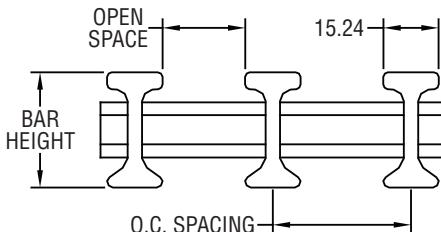SERIES	ON CENTER SPACING	OPEN SPACE	# BARS PER METER OF WIDTH	% OPEN SPACE	BAR HEIGHT (mm)	SPAN ¹ (mm)	kg/m ²	FIGURE
I-2000	19.1mm	3.8mm	52.36	20%	25	1332	22.0	
					32	1485	24.4	
					38	1708	26.9	
I-3000	21.6mm	6.4mm	46.30	30%	25	1288	19.5	
					32	1439	22.0	
					38	1652	23.9	
I-4000	25.4mm	10.2mm	39.37	40%	25	1237	16.6	
					32	1382	18.8	
					38	1587	21.5	
I-4800	29.5mm	14.3mm	33.90	48%	25	1192	14.6	
					38	1529	18.6	
					25	1182	14.2	
I-5000	30.5mm	15.2mm	32.79	50%	32	1320	16.1	
					38	1516	17.6	
					25	1152	13.2	
I-5500	33.8mm	18.6mm	29.60	55%	38	1475	17.1	
					25	1118	11.7	
					32	1241	13.2	
I-6000	38.1mm	22.9mm	26.25	60%	38	1431	14.7	
					25	1076	10.7	
					32	1201	11.7	
I-6500	43.4mm	28.19	23.02	65%	38	1385	13.2	
					25	1034	9.3	
					32	1155	10.3	
I-7000	50.8mm	35.6mm	19.68	70%	38	1332	11.2	
					25	N/A	8.3	
					32	N/A	8.9	
I-7500	61.0mm	45.7mm	16.39	75%	38	N/A	9.8	
					25	N/A	6.8	
					32	N/A	7.5	
I-8000	76.2mm	61.0mm	13.12	80%	38	N/A	8.1	
					25	N/A	6.4	
					32	N/A	6.6	
I-8300	91.4mm	76.2mm	10.94	83%	38	N/A	7.0	
					25	N/A	5.9	
					32	N/A	6.1	
I-8500	101.6mm	86.4mm	9.84	85%	38	N/A	6.5	
					25	N/A	4.4	
					32	N/A	4.6	
I-9000	152.4mm	137.2mm	6.56	90%	38	N/A	4.9	
					25	N/A	4.4	








DURAGRID® T-BAR PULTRUDED GRATING

¹ 4.78 kN/m² load, simple span (dimensions shown), 6.35mm deflection.

NOTES:

² Weight per square foot is based upon cross rods 152.4mm on center. Deduct 0.908 kg/m² for 304.8mm on center.

N/A : Not intended for pedestrian applications. For full load tables, visit <http://www.strongwell.com/gratingloadtables-metric>

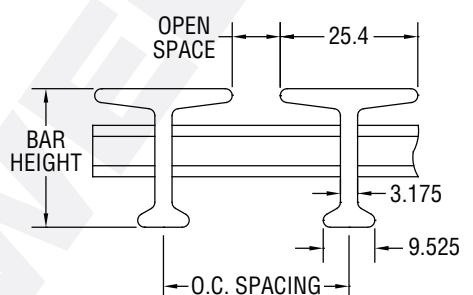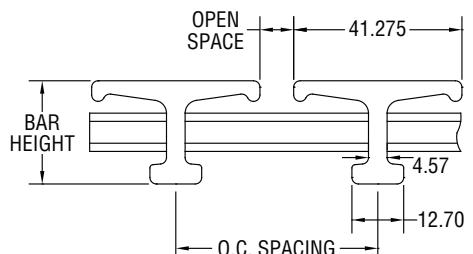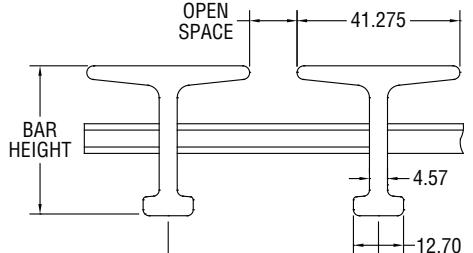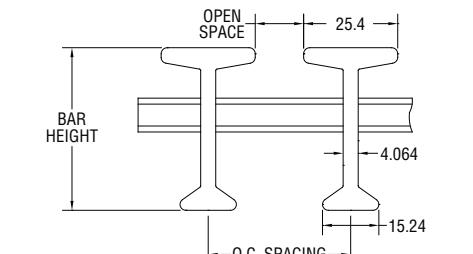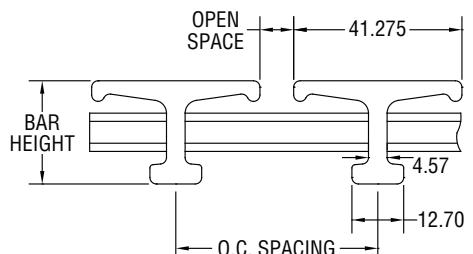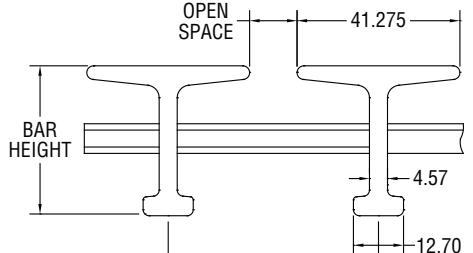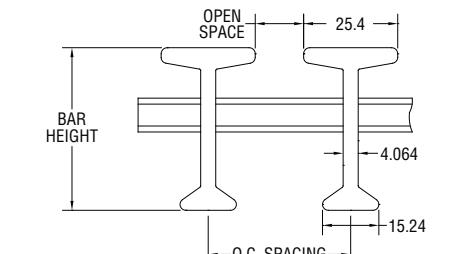SERIES	ON CENTER SPACING	OPEN SPACE	# BARS PER METER OF WIDTH	% OPEN SPACE	BAR HEIGHT (mm)	SPAN ¹ (mm)	kg/m ²	FIGURE
ET-3300	38.1mm	12.7mm	26.25	33%	25	998	9.9	
					38	1230	11.7	
ET-5000	50.8mm	25.4mm	19.68	50%	25	929	7.9	
					38	1144	9.3	
ET-7200	66.1mm	40.7mm	15.13	72%	25	794	4.4	
					38	980	5.4	
ET-8300	152.4mm	127.0mm	6.56	83%	25	N/A	3.9	
ET-8800	203.2mm	177.8mm	4.92	88%	25	N/A	3.4	
T-0000	41.3mm	0.0mm	24.21	0%	25	1142	15.3	
T-1000	45.7mm	4.4mm	21.88	10%	25	1113	14.2	
T-1200	47.0mm	5.7mm	21.28	12%	25	1095	13.7	
T-1800	50.8mm	9.5mm	19.68	18%	25	1074	12.7	
T-2500	53.8mm	12.6mm	18.59	25%	25	1059	12.2	
T-3000	59.2mm	17.9mm	16.89	30%	25	1034	11.5	
T-3500	61.0mm	19.7mm	16.39	35%	25	1026	11.2	
T-3800	66.5mm	25.3mm	15.04	38%	25	1004	10.3	
T-0000	41.3mm	0.0mm	24.21	0%	38	1483	18.7	
T-1000	45.7mm	4.4mm	21.88	10%	38	1446	17.1	
T-1200	47.0mm	5.7mm	21.28	12%	38	1436	16.7	
T-1800	50.8mm	9.5mm	19.68	18%	38	1408	15.6	
T-2500	53.8mm	12.6mm	18.59	25%	38	1388	14.8	
T-3500	61.0mm	19.7mm	16.39	35%	38	1346	13.3	
T-3800	66.5mm	25.3mm	15.04	38%	38	1312	12.4	
T-0000	25.4mm	0.0mm	39.37	0%	51	1980	28.0	
T-1700	30.5mm	5.1mm	32.79	17%	51	1884	23.6	
T-3300	38.1mm	12.7mm	26.25	33%	51	1782	19.2	
T-5000	50.8mm	25.4mm	19.68	50%	51	1651	14.9	
T-5800	61.0mm	35.6mm	16.39	58%	51	1578	12.7	
T-6700	76.2mm	50.8mm	13.12	67%	51	1486	10.7	

DURAGRID® HD PULTRUDED GRATING

¹ 4.78 kN/m² load, simple span (dimensions shown), 6.35mm deflection.

NOTES:

² Weight per square foot is based upon cross rods 152.4mm on center. Deduct 0.908 kg/m² for 304.8mm on center.

HD Grating is generally suitable for long spans or heavy wheel loads. For full load tables, visit <http://www.strongwell.com/gratingloadtables-metric>

SERIES	ON CENTER SPACING	OPEN SPACE	# BARS PER METER OF WIDTH	% OPEN SPACE	BAR HEIGHT (mm)	SPAN ¹ (mm)	kg/m ²	FIGURE
HD-3000	21.6mm	6.4mm	46.30	30%	25	1424	38.1	
					32	1685	46.4	
					38	1899	55.2	
					44	2160	63.5	
					51	2355	78.6	
					57	2592	84.5	
					63.5	2773	88.9	
HD-4000	25.4mm	10.2mm	39.37	40%	25	1367	34.2	
					32	1618	41.5	
					38	1822	49.3	
					44	2074	56.6	
					51	2261	70.3	
					57	2488	71.8	
					63.5	2663	79.6	
HD-5000	30.5mm	15.2mm	32.79	50%	25	1306	28.8	
					32	1546	35.2	
					38	1743	41.5	
					44	1981	47.9	
					51	2160	54.2	
					57	2378	60.5	
					63.5	2544	66.9	
HD-6000	38.1mm	22.9mm	26.25	60%	25	1234	23.9	
					32	1460	28.8	
					38	1645	34.2	
					44	1865	39.1	
					51	2043	44.0	
					57	2249	49.3	
					63.5	2406	54.2	


DURAGRID® R-BAR PULTRUDED GRATING

¹ 4.78 kN/m² load, simple span (dimensions shown), 6.35mm deflection.

NOTES:

² Weight per square foot is based upon cross rods 152.4mm on center. Deduct 0.908 kg/m² for 304.8mm on center.

N/A : Not intended for pedestrian applications. For full load tables, visit <http://www.strongwell.com/gratingloadtables-metric>

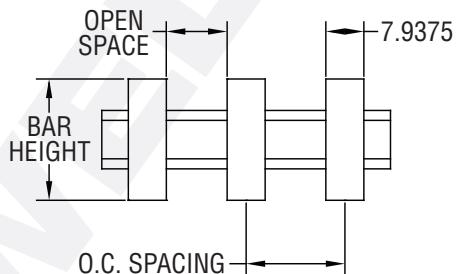SERIES	ON CENTER SPACING	OPEN SPACE	# BARS PER FOOT OF WIDTH	% OPEN SPACE	BAR HEIGHT	SPAN ¹	WT/FT ²	FIGURE
R-6200	20.6mm	12.7mm	48.54	62%	25	1179	22.0	
R-7300	30.2mm	22.3mm	33.11	73%	25	1070	15.6	
R-8300	47.6mm	39.7mm	21	83%	25	955	10.7	
R-9000	76.2mm	68.3mm	13.12	90%	25	843	6.8	
R-9500	152.4mm	144.4mm	6.56	95%	25	700	3.4	
R-9700	301.6mm	293.7mm	3.32	97%	25	589	2.0	

HOW TO SPECIFY DURAGRID® PHENOLIC GRATING

Fiberglass grating shall be DURAGRID® Phenolic Series (_____) as manufactured by Strongwell. Grating shall be pultruded using phenolic resin and assembled in the U.S.A. The grating shall have a current Level 2 USCG Type Approval to ASTM F3059-15¹ and meet the smoke and toxicity requirements of Annex 1 (resolution MSC.307 (88)), Part 2, 2.41 and 2.42 of the FTP Code as issued by the International Maritime Organization (IMO).

Panels shall be assembled into the sizes ordered using a 3-piece pultruded cross-rod system.

The cross-rods shall consist of a center core wedge and two spacer bars that are notched at each bearing bar so that each bearing bar is both mechanically locked and chemically bonded to the web of each bearing bar. The spacer bars shall be continually bonded to the center core wedge. The cross-rods shall be spaced a maximum of 152.4mm in the panel. The top of the panels (shall) (shall not) be covered with a bonded grit anti-skid surface. Color shall be earthenware brown (RAL 8023) signifying Fire Integrity.

¹ASTM F3059 includes requirements for structural fire integrity, durability, (impact and wheel loads) and ASTM tests: B117, D2047, D4060, D4329, E84, E119, E695.

NOTE: If special options are required that are not stated in the above specification, fill in your special requirement in the appropriate section.


NOTE: See Section 20 — **STRONGWELL SPECIFICATIONS FOR FIBERGLASS REINFORCED POLYMER PRODUCTS AND FABRICATIONS**.

HOW TO ORDER DURAGRID® PHENOLIC GRATING

When ordering DURAGRID® Phenolic, ensure the bearing bars for installation will be oriented in the correct direction for the application. Bearing bars shall traverse from support to support. Cross-rods are not intended to be applied in the span direction. The adjacent drawing will help specify the width and length of panels.

NOTE: Width is the measurement from end to end of the cross-rods. Length is always the bearing bar length.

Panel Sizes Are Specified: Width x Length

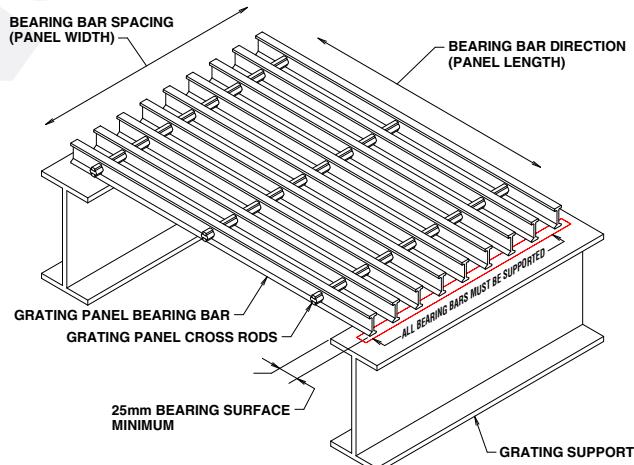


DURAGRID® PHENOLIC GRATING SERIES (MOST POPULAR)

SERIES	BEARING BAR THICKNESS	OPEN AREA	APPROX. WEIGHT kg/m ²	A (PER m OF WIDTH)	I (PER m OF WIDTH)	S (PER m OF WIDTH)	UNIFORM LOAD* kN/m ²	CONCENTRATED LOAD** kN/m
I-6000	38mm	60%	16.8	$6.59 \times 10^3 \text{ mm}^2$	$1.20 \times 10^6 \text{ mm}^4$	$6.32 \times 10^4 \text{ mm}^3$	16.8	11.7
I-5500	38mm	55%	18.9	$7.41 \times 10^3 \text{ mm}^2$	$1.35 \times 10^6 \text{ mm}^4$	$7.11 \times 10^4 \text{ mm}^3$	18.8	13.2
I-4800	38mm	48%	21.7	$8.51 \times 10^3 \text{ mm}^2$	$1.55 \times 10^6 \text{ mm}^4$	$8.16 \times 10^4 \text{ mm}^3$	21.5	15.1
I-4000	38mm	40%	25.2	$9.89 \times 10^3 \text{ mm}^2$	$1.81 \times 10^6 \text{ mm}^4$	$9.48 \times 10^4 \text{ mm}^3$	25.0	17.5
I-6000	45mm	60%	19.0	$7.99 \times 10^3 \text{ mm}^2$	$2.02 \times 10^6 \text{ mm}^4$	$8.45 \times 10^4 \text{ mm}^3$	27.9	19.6
I-5500	45mm	55%	21.4	$8.99 \times 10^3 \text{ mm}^2$	$2.27 \times 10^6 \text{ mm}^4$	$9.51 \times 10^4 \text{ mm}^3$	31.5	22.0
I-4800	45mm	48%	24.6	$10.82 \times 10^3 \text{ mm}^2$	$2.61 \times 10^6 \text{ mm}^4$	$10.92 \times 10^4 \text{ mm}^3$	36.1	25.3
I-4000	45mm	40%	28.8	$11.99 \times 10^3 \text{ mm}^2$	$3.03 \times 10^6 \text{ mm}^4$	$12.68 \times 10^4 \text{ mm}^3$	41.9	29.3

* Uniform load based on a qualified span of 1.12m to produce a deflection of 6.35mm at midspan.

** Concentrated load based on a qualified span of 1.12m to produce a deflection of 6.35mm at midspan.

DURAGRID® PHENOLIC GRATING UNIFORM LOAD / DEFLECTION

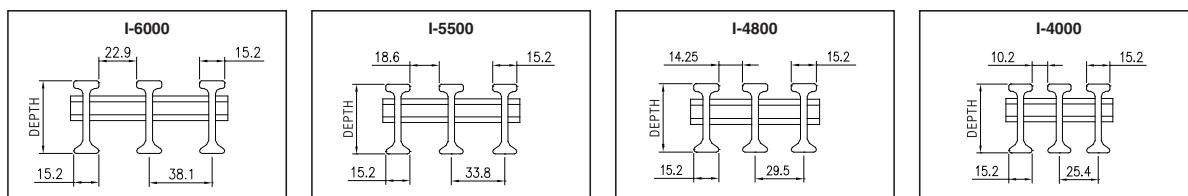


LOAD in kN / SQUARE METER

SPAN M	STYLE		LOAD in kN / SQUARE METER												SAFE LOAD, 2:1 SAFETY FACTOR	DEFLEC- TION	$E \times 10^{10}$ N/m ²		
	SERIES	DEPTH	3	5	7.5	10	13	15	20	25	39	50	100	150	200	250			
0.6	I-6000	38mm	0.11	0.19	0.29	0.38	0.50	0.57	0.77	0.96	1.49	1.91	3.83	5.74	7.66	9.57	258	9.9	3.66
	I-5500	38mm	0.10	0.17	0.26	0.34	0.44	0.51	0.68	0.85	1.33	1.70	3.41	5.11	6.81	8.51	291	9.9	3.66
	I-4800	38mm	0.09	0.15	0.22	0.30	0.39	0.45	0.59	0.74	1.16	1.48	2.97	4.45	5.93	7.42	333	9.9	3.66
	I-4000	38mm	0.08	0.13	0.19	0.26	0.33	0.38	0.51	0.64	1.00	1.28	2.55	3.83	5.11	6.39	387	9.9	3.66
	I-6000	45mm	0.07	0.11	0.17	0.23	0.30	0.34	0.46	0.57	0.89	1.14	2.28	3.42	4.57	5.71	345	7.9	3.66
	I-5500	45mm	0.06	0.10	0.15	0.20	0.26	0.30	0.41	0.51	0.79	1.01	2.03	3.04	4.06	5.07	389	7.9	3.66
	I-4800	45mm	0.05	0.09	0.13	0.18	0.23	0.27	0.35	0.44	0.69	0.88	1.77	2.65	3.53	4.42	446	7.9	3.66
	I-4000	45mm	0.05	0.08	0.11	0.15	0.20	0.23	0.30	0.38	0.59	0.76	1.52	2.28	3.04	3.81	518	7.9	3.66
0.8	I-6000	38mm	0.34	0.57	0.85	1.14	1.48	1.70	2.27	2.84	4.43	5.68	11.36				180	20.4	3.90
	I-5500	38mm	0.30	0.50	0.76	1.01	1.31	1.51	2.02	2.52	3.94	5.05	10.10	15.15			203	20.5	3.90
	I-4800	38mm	0.26	0.44	0.66	0.88	1.14	1.32	1.76	2.20	3.43	4.40	8.80	13.20			233	20.5	3.90
	I-4000	38mm	0.23	0.38	0.57	0.76	0.98	1.14	1.52	1.89	2.95	3.79	7.58	11.36	15.15		270	20.5	3.90
	I-6000	45mm	0.20	0.34	0.51	0.68	0.88	1.02	1.35	1.69	2.64	3.38	6.77	10.15			218	14.8	3.90
	I-5500	45mm	0.18	0.30	0.45	0.60	0.78	0.90	1.20	1.50	2.35	3.01	6.02	9.03	12.04		246	14.8	3.90
	I-4800	45mm	0.16	0.26	0.39	0.52	0.68	0.79	1.05	1.31	2.04	2.62	5.24	7.86	10.48		282	14.8	3.90
	I-4000	45mm	0.14	0.23	0.34	0.45	0.59	0.68	0.90	1.13	1.76	2.26	4.51	6.77	9.03	11.29	327	14.8	3.90
1.0	I-6000	38mm	0.77	1.28	1.93	2.57	3.34	3.85	5.14	6.42	10.02	12.84					163	41.9	4.21
	I-5500	38mm	0.69	1.14	1.71	2.28	2.97	3.43	4.57	5.71	8.91	11.42					184	42.0	4.21
	I-4800	38mm	0.60	1.00	1.49	1.99	2.59	2.99	3.98	4.98	7.76	9.95					211	41.9	4.21
	I-4000	38mm	0.51	0.86	1.29	1.71	2.23	2.57	3.43	4.28	6.68	8.57					245	41.9	4.21
	I-6000	45mm	0.46	0.77	1.15	1.53	1.99	2.30	3.06	3.83	5.97	7.66					140	21.4	4.21
	I-5500	45mm	0.41	0.68	1.02	1.36	1.77	2.04	2.72	3.40	5.31	6.81	13.61				158	21.5	4.21
	I-4800	45mm	0.36	0.59	0.89	1.19	1.54	1.78	2.37	2.96	4.62	5.93	11.85	17.78			181	21.4	4.21
	I-4000	45mm	0.31	0.51	0.77	1.02	1.33	1.53	2.04	2.55	3.98	5.11	10.21	15.32			210	21.4	4.21
1.12	I-6000	38mm	1.15	1.92	2.88	3.84	4.99	5.76	7.68	9.60							84	32.3	4.43
	I-5500	38mm	1.02	1.71	2.56	3.42	4.44	5.12	6.83	8.54	13.32						95	32.4	4.43
	I-4800	38mm	0.89	1.49	2.23	2.98	3.87	4.46	5.95	7.44	11.61	14.88					109	32.3	4.43
	I-4000	38mm	0.77	1.28	1.92	2.56	3.33	3.84	5.12	6.41	9.99	12.81					126	32.3	4.43
	I-6000	45mm	0.69	1.14	1.72	2.29	2.98	3.43	4.58	5.72	8.93	11.45					111	25.4	4.43
	I-5500	45mm	0.61	1.02	1.53	2.04	2.65	3.05	4.07	5.09	7.94	10.18	20.36				125	25.5	4.43
	I-4800	45mm	0.53	0.89	1.33	1.77	2.30	2.66	3.55	4.43	6.91	8.86	17.73				143	25.4	4.43
	I-4000	45mm	0.46	0.76	1.15	1.53	1.98	2.29	3.05	3.82	5.95	7.63	15.27				167	25.4	4.43

NOTE: The black area () indicates at what point the load weight has $\leq 6.35\text{mm}$ deflection.

NOTE: These tables represent the most popular series of DURAGRID® Phenolic.

For all other series and sizes, contact your Strongwell representative.

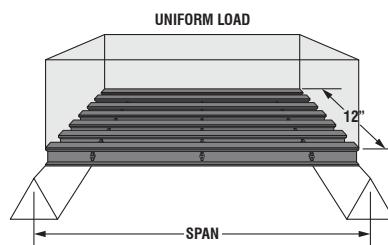

DURAGRID® PHENOLIC GRATING UNIFORM LOAD / DEFLECTION


LOAD in kN / SQUARE METER

SPAN M	STYLE		LOAD in kN / SQUARE METER													SAFE LOAD, 2:1 SAFETY FACTOR	DEFLEC- TION	E X 10 ¹⁰ N/m ²	
	SERIES	DEPTH	3	5	7.5	10	13	15	20	25	39	50	100	150	200	250			
1.2	I-6000	38mm	1.48	2.46	3.70	4.93	6.41	7.39	9.86	12.32							70	34.5	4.55
	I-5500	38mm	1.31	2.19	3.29	4.38	5.70	6.57	8.77	10.96							79	34.6	4.55
	I-4800	38mm	1.15	1.91	2.86	3.82	4.96	5.73	7.64	9.55	14.89						90	34.5	4.55
	I-4000	38mm	0.99	1.64	2.47	3.29	4.27	4.93	6.58	8.22	12.82						105	34.5	4.55
	I-6000	45mm	0.88	1.47	2.20	2.94	3.82	4.41	5.88	7.34	11.46						97	28.5	4.55
	I-5500	45mm	0.78	1.31	1.96	2.61	3.40	3.92	5.22	6.53	10.19	13.06					109	28.6	4.55
	I-4800	45mm	0.68	1.14	1.71	2.27	2.96	3.41	4.55	5.69	8.87	11.37					125	28.5	4.55
	I-4000	45mm	0.59	0.98	1.47	1.96	2.55	2.94	3.92	4.90	7.64	9.80					146	28.5	4.55
1.4	I-6000	38mm	2.70	4.50	6.74	8.99	11.69	13.49									56	50.4	4.62
	I-5500	38mm	2.40	4.00	6.00	8.00	10.40	11.99									63	50.5	4.62
	I-4800	38mm	2.09	3.48	5.23	6.97	9.06	10.45	13.93								72	50.4	4.62
	I-4000	38mm	1.80	3.00	4.50	6.00	7.80	9.00	12.00	15.00							84	50.4	4.62
	I-6000	45mm	1.61	2.68	4.02	5.36	6.97	8.04	10.72	13.40							71	38.1	4.62
	I-5500	45mm	1.43	2.38	3.57	4.77	6.20	7.15	9.53	11.91							80	38.2	4.62
	I-4800	45mm	1.24	2.07	3.11	4.15	5.39	6.22	8.30	10.37	16.18						92	38.1	4.62
	I-4000	45mm	1.07	1.79	2.68	3.57	4.65	5.36	7.15	8.94	13.94						107	38.1	4.62
1.6	I-6000	38mm	4.53	7.56	11.33												40	60.4	4.69
	I-5500	38mm	4.03	6.72	10.08	13.44											45	60.6	4.69
	I-4800	38mm	3.51	5.85	8.78	11.71	15.22										52	60.5	4.69
	I-4000	38mm	3.02	5.04	7.56	10.08	13.10										60	60.5	4.69
	I-6000	45mm	2.70	4.50	6.76	9.01	11.71	13.51									55	49.5	4.69
	I-5500	45mm	2.40	4.00	6.01	8.01	10.41	12.01									62	49.7	4.69
	I-4800	45mm	2.09	3.49	5.23	6.97	9.07	10.46	13.95								71	49.5	4.69
	I-4000	45mm	1.80	3.00	4.51	6.01	7.81	9.01	12.01								83	49.6	4.69
1.8	I-6000	38mm	7.26	12.10													32	77.5	4.69
	I-5500	38mm	6.46	10.76													36	77.7	4.69
	I-4800	38mm	5.63	9.38	14.07												41	77.6	4.69
	I-4000	38mm	4.84	8.07	12.11												48	77.5	4.69
	I-6000	45mm	4.33	7.21	10.82												43	62.0	4.69
	I-5500	45mm	3.85	6.41	9.62	12.83											48	62.2	4.69
	I-4800	45mm	3.35	5.59	8.38	11.17	14.52										56	62.0	4.69
	I-4000	45mm	2.89	4.81	7.22	9.62	12.51	14.43									65	62.1	4.69
2.0	I-6000	45mm	6.60	11.00													35	77.0	4.69
	I-5500	45mm	5.87	9.78													39	77.2	4.69
	I-4800	45mm	5.11	8.51	12.77												45	77.0	4.69
	I-4000	45mm	4.46	7.33	11.00	14.67											53	77.0	4.69

NOTE: The black area () indicates at what point the load weight has ≤ 6.35mm deflection.

NOTE: These tables represent the most popular series of DURAGRID® Phenolic. For all other series and sizes, contact your Strongwell representative.

DURAGRID® PHENOLIC GRATING CONCENTRATED LOAD / DEFLECTION

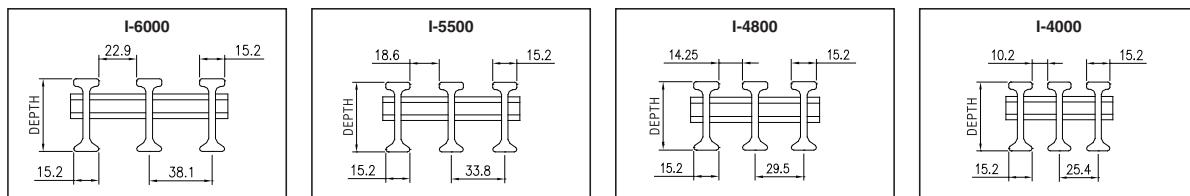

LOAD in kN / SQUARE METER


SPAN M	STYLE		LOAD in kN / SQUARE METER													SAFE LOAD, 2:1 SAFETY FACTOR	DEFLEC- TION	E X 10 ¹⁰ N/m ²	
	SERIES	DEPTH	3	5	7.5	10	13	15	20	25	39	50	100	150	200	250			
0.6	I-6000	38mm	0.31	0.51	0.77	1.02	1.33	1.53	2.04	2.55	3.98	5.11					79	8.1	3.66
	I-5500	38mm	0.27	0.45	0.68	0.91	1.18	1.36	1.82	2.27	3.54	4.54					89	8.1	3.66
	I-4800	38mm	0.24	0.40	0.59	0.79	1.03	1.19	1.58	1.98	3.09	3.96	7.91				102	8.1	3.66
	I-4000	38mm	0.20	0.34	0.51	0.68	0.89	1.02	1.36	1.70	2.66	3.41	6.81				119	8.1	3.66
	I-6000	45mm	0.18	0.30	0.46	0.61	0.79	0.91	1.22	1.52	2.37	3.04	6.09				105	6.4	3.66
	I-5500	45mm	0.16	0.27	0.41	0.54	0.70	0.81	1.08	1.35	2.11	2.71	5.41				118	6.4	3.66
	I-4800	45mm	0.14	0.24	0.35	0.47	0.61	0.71	0.94	1.18	1.84	2.36	4.71				136	6.4	3.66
	I-4000	45mm	0.12	0.20	0.30	0.41	0.53	0.61	0.81	1.01	1.58	2.03	4.06	6.09			158	6.4	3.66
0.8	I-6000	38mm	0.68	1.14	1.70	2.27	2.95	3.41	4.54	5.68	8.86	11.36					69	15.7	3.90
	I-5500	38mm	0.61	1.01	1.51	2.02	2.63	3.03	4.04	5.05	7.88	10.10					78	15.7	3.90
	I-4800	38mm	0.53	0.88	1.32	1.76	2.29	2.64	3.52	4.40	6.86	8.80					89	15.7	3.90
	I-4000	38mm	0.45	0.76	1.14	1.52	1.97	2.27	3.03	3.79	5.91	7.58					104	15.7	3.90
	I-6000	45mm	0.41	0.68	1.02	1.35	1.76	2.03	2.71	3.38	5.28	6.77					87	11.8	3.90
	I-5500	45mm	0.36	0.60	0.90	1.20	1.56	1.81	2.41	3.01	4.69	6.02					98	11.8	3.90
	I-4800	45mm	0.31	0.52	0.79	1.05	1.36	1.57	2.10	2.62	4.09	5.24	10.48				112	11.8	3.90
	I-4000	45mm	0.27	0.45	0.68	0.90	1.17	1.35	1.81	2.26	3.52	4.51	9.03				131	11.8	3.90
1.0	I-6000	38mm	1.23	2.06	3.08	4.11	5.34	6.17	8.22	10.28							65	26.7	4.21
	I-5500	38mm	1.10	1.83	2.74	3.65	4.75	5.48	7.31	9.14	14.25						73	26.8	4.21
	I-4800	38mm	0.96	1.59	2.39	3.18	4.14	4.78	6.37	7.96	12.42	15.92					84	26.8	4.21
	I-4000	38mm	0.82	1.37	2.06	2.74	3.56	4.11	5.48	6.85	10.69	13.71					98	26.7	4.21
	I-6000	45mm	0.73	1.22	1.84	2.45	3.18	3.67	4.90	6.12	9.55	12.25					70	17.1	4.21
	I-5500	45mm	0.65	1.09	1.63	2.18	2.83	3.27	4.36	5.45	8.49	10.89					79	17.2	4.21
	I-4800	45mm	0.57	0.95	1.42	1.90	2.47	2.85	3.79	4.74	7.40	9.48					90	17.1	4.21
	I-4000	45mm	0.49	0.82	1.23	1.63	2.12	2.45	3.27	4.08	6.37	8.17					105	17.2	4.21
1.12	I-6000	38mm	1.65	2.74	4.12	5.49	7.13	8.23	10.98								47	25.8	4.43
	I-5500	38mm	1.46	2.44	3.66	4.88	6.34	7.32	9.76	12.20							53	25.9	4.43
	I-4800	38mm	1.28	2.13	3.19	4.25	5.53	6.38	8.50	10.63	16.58						61	25.8	4.43
	I-4000	38mm	1.10	1.83	2.75	3.66	4.76	5.49	7.32	9.15	14.28						71	25.8	4.43
	I-6000	45mm	0.98	1.64	2.45	3.27	4.25	4.91	6.54	8.18	12.76						62	20.3	4.43
	I-5500	45mm	0.87	1.45	2.18	2.91	3.78	4.36	5.82	7.27	11.34	14.54					70	20.3	4.43
	I-4800	45mm	0.76	1.27	1.90	2.53	3.29	3.80	5.06	6.33	9.88	12.66					80	20.3	4.43
	I-4000	45mm	0.65	1.09	1.64	2.18	2.84	3.27	4.36	5.45	8.51	10.91					93	20.3	4.43

NOTE: The black area () indicates at what point the load weight has ≤ 6.35mm deflection.

NOTE: These tables represent the most popular series of DURAGRID® Phenolic.

For all other series and sizes, contact your Strongwell representative.

CONCENTRATED LINE LOAD

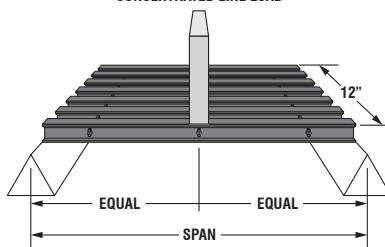

DURAGRID® PHENOLIC GRATING CONCENTRATED LOAD / DEFLECTION

LOAD in kN / SQUARE METER

SPAN M	STYLE		LOAD in kN / SQUARE METER													SAFE LOAD, 2:1 SAFETY FACTOR	DEFLEC- TION	E X 10 ¹⁰ N/m ²	
	SERIES	DEPTH	3	5	7.5	10	13	15	20	25	39	50	100	150	200	250			
1.2	I-6000	38mm	1.97	3.29	4.93	6.57	8.54	9.86	13.14								43	28.3	4.55
	I-5500	38mm	1.75	2.92	4.38	5.84	7.60	8.77	11.69								48	28.3	4.55
	I-4800	38mm	1.53	2.55	3.82	5.09	6.62	7.64	10.18	12.73							56	28.3	4.55
	I-4000	38mm	1.32	2.19	3.29	4.38	5.70	6.58	8.77	10.96							65	28.3	4.55
	I-6000	45mm	1.18	1.96	2.94	3.92	5.09	5.88	7.83	9.79							58	22.7	4.55
	I-5500	45mm	1.04	1.74	2.61	3.48	4.53	5.22	6.96	8.71	13.58						65	22.8	4.55
	I-4800	45mm	0.91	1.52	2.27	3.03	3.94	4.55	6.07	7.58	11.83	15.16					75	22.7	4.55
	I-4000	45mm	0.78	1.31	1.96	2.61	3.40	3.92	5.22	6.53	10.19	13.06					87	22.7	4.55
1.4	I-6000	38mm	3.08	5.14		7.71	10.28	13.36									38	39.1	4.62
	I-5500	38mm	2.74	4.57		6.85	9.14	11.88	13.71								43	39.2	4.62
	I-4800	38mm	2.39	3.98	5.97		7.96	10.35	11.94	15.93							49	39.1	4.62
	I-4000	38mm	2.06	3.43	5.14		6.86	8.91	10.28	13.71							57	39.1	4.62
	I-6000	45mm	1.84	3.06	4.59	6.13	7.96	9.19	12.25								50	30.6	4.62
	I-5500	45mm	1.63	2.72	4.08	5.45	7.08	8.17	10.89	13.62							56	30.7	4.62
	I-4800	45mm	1.42	2.37	3.56	4.74	6.17	7.11	9.49	11.86							65	30.6	4.62
	I-4000	45mm	1.23	2.04	3.06	4.09	5.31	6.13	8.17	10.21							75	30.6	4.62
1.6	I-6000	38mm	4.53		7.56	11.33											32	48.4	4.69
	I-5500	38mm	4.03		6.72	10.08	13.44										36	48.5	4.69
	I-4800	38mm	3.51	5.85		8.78	11.71	15.22									41	48.4	4.69
	I-4000	38mm	3.02	5.04		7.56	10.08	13.10									48	48.4	4.69
	I-6000	45mm	2.70	4.50		6.76	9.01	11.71	13.51								44	39.6	4.69
	I-5500	45mm	2.40	4.00	6.01		8.01	10.41	12.01								50	39.7	4.69
	I-4800	45mm	2.09	3.49	5.23		6.97	9.07	10.46	13.95							57	39.6	4.69
	I-4000	45mm	1.80	3.00	4.51	6.01		7.81	9.01	12.01							66	39.6	4.69
1.8	I-6000	38mm	6.46		10.76												29	62.4	4.69
	I-5500	38mm	5.74		9.57	14.35											33	62.6	4.69
	I-4800	38mm	5.00		8.34	12.50											37	62.5	4.69
	I-4000	38mm	4.31		7.18	10.76											44	62.4	4.69
	I-6000	45mm	3.83		6.41	9.62	12.82										39	50.0	4.69
	I-5500	45mm	3.42	5.70		8.55	11.40										44	50.2	4.69
	I-4800	45mm	2.98	4.96		7.45	9.93	12.91	14.89								50	50.0	4.69
	I-4000	45mm	2.57	4.26		6.41	8.55	11.12	12.83								59	50.0	4.69
2.0	I-6000	45mm	5.26		8.80	13.19											35	61.6	4.69
	I-5500	45mm	4.69		7.82	11.73											39	61.7	4.69
	I-4800	45mm	4.09		6.81	10.22	13.62										45	61.6	4.69
	I-4000	45mm	3.52	5.67		8.80	11.73										53	61.6	4.69

NOTE: The black area ([]) indicates at what point the load weight has ≤ 6.35mm deflection.

NOTE: These tables represent the most popular series of DURAGRID® Phenolic. For all other series and sizes, contact your Strongwell representative.